



Inductive High-Temperature Sensors Series - 250


Housing M 32 x 1.5

- For connection to the evaluation unit ISA-250...
- Housing material: Stainless steel
- For an ambient temperature of max. 250 °C

Certificate:



Technical data	Non-flush mountable
Operating distance S_n	15 mm
Sensing distance adjustable at the evaluation unit	-
Type	IS-250-M32
Art.-No.	552 102
Permitted ambient temperature	-70...+250 °C
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection for inductive evaluation units ISA-....	5 m FEP, Triax
Housing material	VA No. 1.4305
Active surface	PTFE (FDA 21 CFR 177.1550)

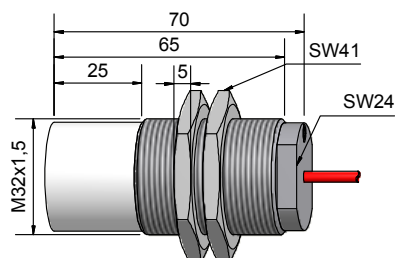

All specifications are subject to change without notice. (19.01.2012)

Made in Germany