


WIRES ARE HOUSED IN A VINYL TUBE.
T IS THE EARTH TERMINAL.

Dimensions in mm.

FEATURES CARATTERISTICHE	
MODEL MODELLO	103 - H89223 - 6641 (103 - H89223 - 6611)
BASIC STEP ANGLE	1.8° ± 0.09°
BIPOLAR CURRENT (Amp)	12
UNIPOLAR CURRENT (Amp)	
RESISTANCE (Ohm)	0.16
INDUCTANCE (mH)	2
BIPOLAR HOLDING TORQUE (Ncm)	2460
UNIPOLAR HOLDING TORQUE (Ncm)	
ROTOR INERTIA (Kg ^m 2 x 10 ⁻⁷)	22000
THEORETICAL ACCELERATION (rad x sec. ⁻²)	11100
BACK E.M.F. (V/Krpm)	205
MASS (Kg)	10
PROTECTION DEGREE	IP43
LEADS CODE	V

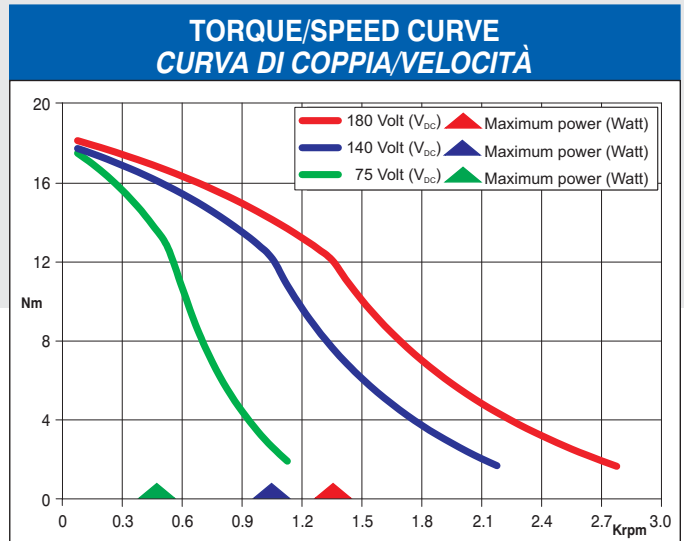

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.



Suggested driver: contact R.T.A.

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)