


timing:
 during one circle
 each outlet blows about
 1.5 sec long (--> on)
 every 120 sec.

CAUTION:
 do not use more than 60psi (4,14 bar)
 sequencer damage may occur

2x Befestigungsschraube
 2x mounting screw
 UNF 10-32x 3/8"
 (--> $\text{Ø}4.8 \times 9.5\text{mm}$)

included

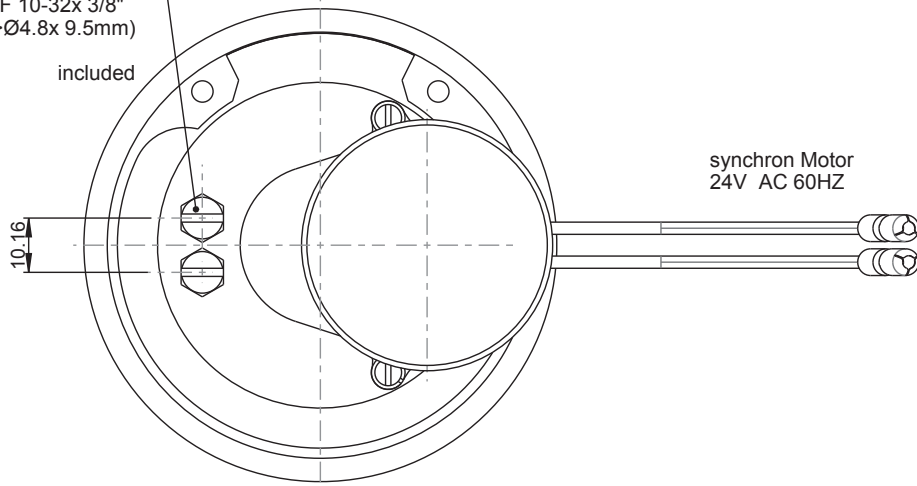

Luft-Sequencer, 18 Ausgänge, einfacher Luftauslass
 Air Sequencer, 18 outlets, single cam

611-240-015-1000

09.02.2010 Ja/AWT