


Ratio 1:1 Flow rate 23 l/min

Ratio 1:1 Flow rate 40 l/min

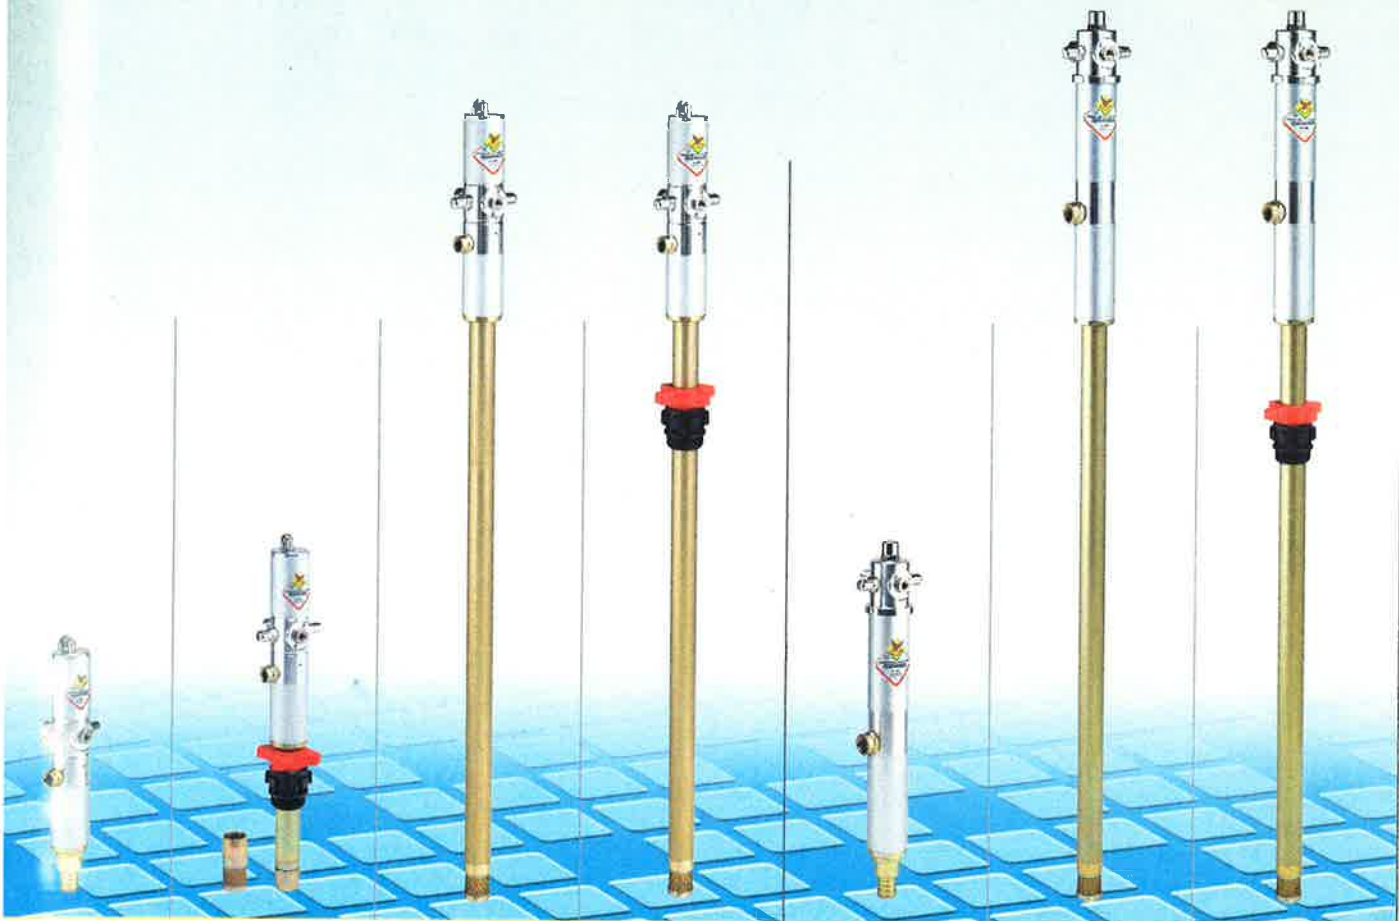

series 600

serie 650

| | | | | | | |
|---|-----------------|----------------------------------|----------------------------------|---|----------------------------------|----------------------------------|
| 33080 | 33081 | 33082 | 33083 | | | |
| 33070 | 33071 | 33072 | 33073 | 33170 | 33172 | 33173 |
| 33060 | 33061 | 33094 | 33096 | 33160 | 33194 | 33196 |
| Oils, lubricants and similar Aluminium Carbon steel | | | | Oils, lubricants and similar Aluminium Carbon steel | | |
| F 1/4" G | F 1/4" G | F 1/4" G | F 1/4" G | F 1/4" G | F 1/4" G | F 1/4" G |
| F 1/2" G | F 1/2" G | F 1/2" G | F 1/2" G | F 3/4" G | F 3/4" G | F 3/4" G |
| 6 - 8 | 6 - 8 | 6 - 8 | 6 - 8 | 6 - 8 | 6 - 8 | 6 - 8 |
| 230 | 230 | 230 | 230 | 370 | 370 | 370 |
| 81 | 81 | 81 | 81 | 81 | 81 | 81 |
| 80 | 80 | 80 | 80 | 130 | 130 | 130 |
| - | standard | - | standard | - | - | standard |
| | | | | | | |
| modular | customisable 1" | suitable for drums 180-220 Kg | suitable for drums 180-220 Kg | modular | suitable for drums 180-220 Kg | suitable for drums 180-220 Kg |
| 1 - 0,006 | 1 - 0,006 | 1 - 0,020 | 1 - 0,020 | 1 - 0,010 | 1 - 0,020 | 1 - 0,020 |
| 4,3 | 5 | 6,2 | 6,3 | 5,3 | 7,3 | 7,4 |
| 35,5 - 0 - 0 | 35,5 - 22 - 4,2 | 35,5 - 94 - 4,2 | 35,5 - 94 - 4,2 | 50,5 - 0 - 0 | 50,5 - 94 - 4,2 | 50,5 - 94 - 4,2 |

