

Connection dimensions for Motor [mm]

Form **B5**

u = 176 w = 114,3 F7
 m = 5 t = 36 f1 = 242
 v = 200 s = 4 x M12
 d1 x l1 max = 35 x 79

Gearbox including lantern and coupling
 Lifetime lubrication
 Synthetic oil: ISO VG 150
 Primary coating: black RAL - 9005
 mounting position: universal
 Backlash on shaft d2: < 4 arcmin
 Motor shaft Ø35x79
 shaft d2 inclusiv key according DIN 6885-1

N 30

Ident. Number
22115A000305

Dimension Sheet Number
M22115A000305-3837

Customer
kunde




Graessner GmbH & Co.KG
 D-72135 Dettenhausen, Germany
 www.graessner.de

Created by
 Phone
 E-mail

Mathis Eder
 +49 (0) 7157 123-128
 Mathis.Eder@graessner.de

1/2
 11.06.2019

Assembly

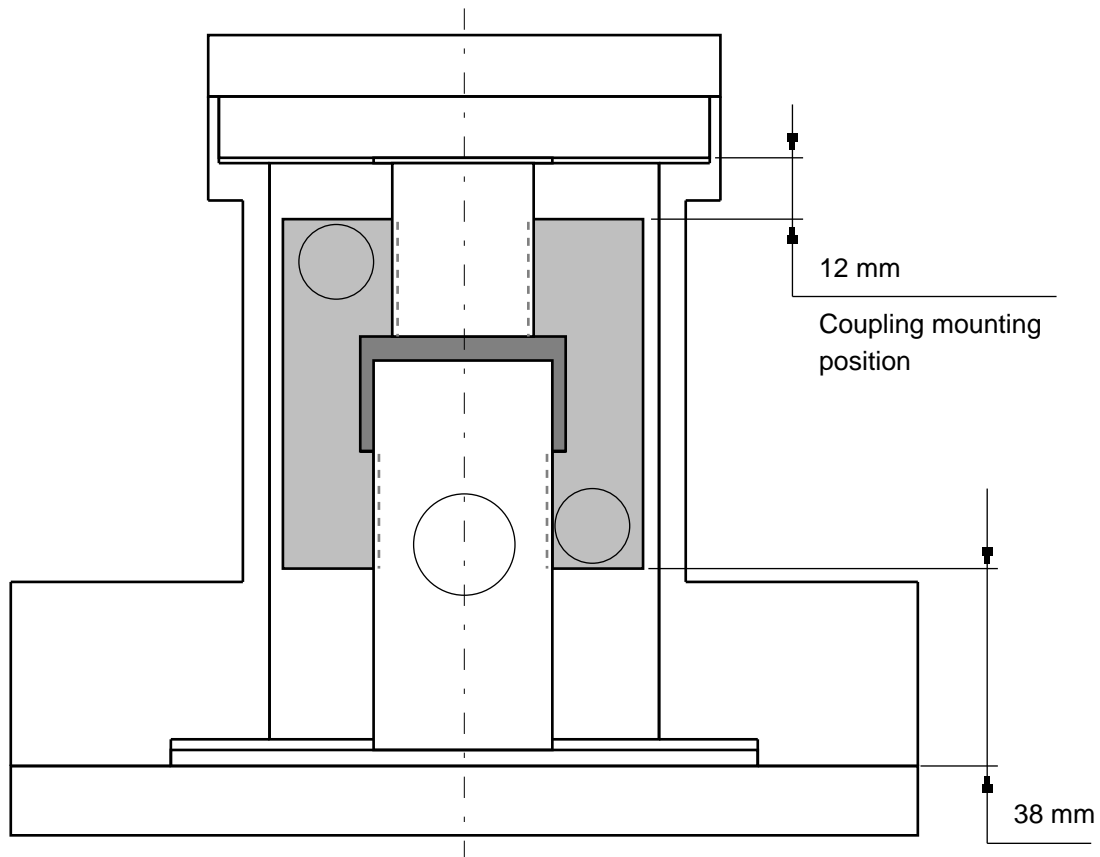

Coupling Data

Inertia	3,5 kgcm ²
Torsional stiffness (stat.)	64 x10 ³ Nm / rad
Torsional stiffness (dyn.)	64 x10 ³ Nm / rad
Weight	0,5 kg
Bolt tightening torque	35 Nm
Coupling mounting position	12 mm
-----	Lubricant free surface

10 mm



N 30

Ident. Number
22115A000305

Dimension Sheet Number
M22115A000305-3837

Customer
kunde



Graessner GmbH & Co.KG
D-72135 Dettenhausen, Germany
www.graessner.de

Created by
Phone
E-mail

Mathis Eder
+49 (0) 7157 123-128
Mathis.Eder@graessner.de

2/2
11.06.2019