



# Filter Clogging Indicators

## 1. TECHNICAL SPECIFICATIONS

### 1.1 GENERAL

HYDAC clogging indicators are designed to indicate visually and/or electrically when the filter elements must be cleaned or changed. The operational safety of a system and efficient utilisation of a filter element can only be guaranteed if clogging indicators are used.

Depending on the type of filter, vacuum, return line or differential pressure clogging indicators are used.

### 1.2 SEALS

NBR (= Perbunan) or V (= Viton)

### 1.3 INSTALLATION

Some users install filters without clogging indicators and prefer instead to replace or clean the elements according to a specified time schedule or according to a set number of operating hours. However, this involves some risk.

Fitting a clogging indicator has two main advantages:


- The operator no longer has to estimate when the element is clogged.
- The unnecessary costs of changing the element too early are avoided.

All standard filters can be fitted with a clogging indicator at any time, by simply screwing it in.

### 1.4 DESIGN

#### Return line indicators

These are used for return line and suction filters. In return line filters they react to the increasing static pressure before the filter element, and in suction filters to the decreasing pressure after the filter element, which is caused by increasing contamination.

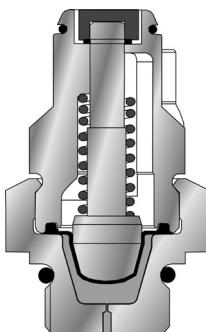


#### Differential pressure indicators

These are used for all inline filters and react to the increasing pressure differential caused by increasing contamination of the filter element.

The simplest installation of the differential clogging indicator is via G 1/2" cavity (according to HYDAC works standard HN 28-22)

The differential pressure indicator type V02 is piped up separately.

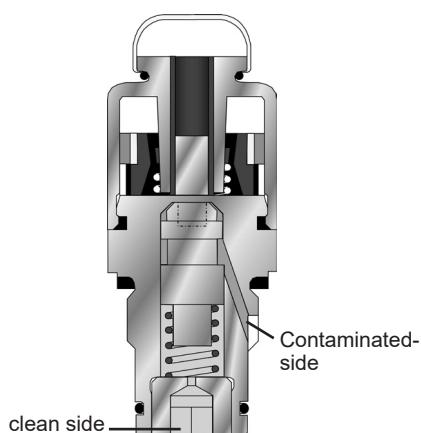

### 1.5 SPECIAL INDICATORS

#### Mobile indicators

These indicators have been developed for special applications and are fitted with AMP Junior Power Timer, AMP Superseal or Deutsch plugs.

#### ATEX indicators

These indicators are used in potentially explosive locations and are subject to the ATEX Equipment Directive 2014/34/EU and the ATEX Operator Directive 1999/92/EG.



#### UL and CSA indicators

Indicators which are exported to the USA and Canada often require classification according to current UL and CSA standards. The UL and CSA symbols are found on many products, particularly in the field of electrical engineering.



### 1.6 TABLE OF CONTENTS

Contents	Page:
<b>Quick selection table: by indicator type</b>	<b>2</b>
<b>Quick selection table: by filter type</b>	<b>3</b>
<b>Standard indicators</b>	
Vacuum	4
Return line	7
Differential pressure	21
<b>Indicator (VL...GW.x) for Condition Monitoring</b>	<b>24</b>
<b>Mobile indicators</b>	
Return line	29
Differential pressure	31
<b>ATEX indicators</b>	
Return line	34
Differential pressure	36
<b>UL/CSA indicators</b>	
Differential pressure	38
Return line	39
<b>Model code - Standard</b>	<b>40</b>
<b>Adapters</b>	<b>42</b>
<b>DESINA Specification</b>	<b>44</b>

## 2. QUICK SELECTION TABLES FOR CLOGGING INDICATORS

### 2.1 BY INDICATOR TYPE

Please select the type of indicator you require from the table.

Type		Vacuum indicator	Permitt. operating pressure [bar]	Return line indicator	Permitt. operating pressure [bar]	Differential pressure indicator	Permitt. operating pressure [bar]
Visual	B			●	7	●	210/420
	BF					●	40
	BM			●	7	●	210/420
	E			●	7 (11)		
	ES			●	7		
	K	●	*	●	*		
	R			●	7		
	UBM	●	0				
	UE	●	0				
	UED	●	0				
Electrical	V					●	100
	C			●	40	●	210/420
	D			●	40	●	210/420
	F			●	40		
	LE			●	7	●	420
	LZ			●	7	●	420
	UF	●	0				
	VE					●	100
Electronic	VZ					●	100
	GC			●	7	●	420
Mobile	GW					●	25
	CD					●	210
	CJ					●	210/420
	CM			●	40	●	210
	CS					●	210/420
	FD			●	40		
	FJ			●	40		
	FS			●	40		
	LEM			●	7	●	420
ATEX	M					●	210
	B			●	7	●	210/420
UL Approval (=CRUUS)	C			●	40	●	210/420
	CSA Approval	C		●	40		

\* Dependent on application.

## 2.2 BY FILTER TYPE

Please select the clogging indicator required for your filter from the table.

Type	BF	BL	BLT	DF DFF	DFDK DFDKN	DF MA/QE MP	DFM	DFN DFNF	DFP DFPF DFFX	DFZ	ELF	FLN	FLND FMND	HDF HDFF	HDP	HFM	LF LFF	LFM	LFN LFNF
B				●	●	●	●	●				●	●			●	●	●	●
BF																			
BM				●	●	●	●	●	●	●		●	●	●		●	●	●	●
E																			
ES																			
K	●	●	●								●								
R/RS																			
UBM	●	●	●								●								
UE												● <sup>1)</sup>					● <sup>1)</sup>		
UED																●			
V																			
C				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
D				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
F																			
LE				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LZ				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
UF												● <sup>1)</sup>					● <sup>1)</sup>		
VE																			
VZ																			
GC				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
GW																			
CD				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
CJ/CS				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
CM				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
FJ/FD/ FS																			
M												●	●				●	●	●
LEM				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Type	LPF	MDF	MF	MFD	MFM	MFX	NF	NFD	RF	RFD	RFL	RFLD	RFN	RFND	RFM	RKM	SF	SFF	SFM
B	●	●			●				●	●	●	●	●	●	●	●			
BF	●					●													
BM	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
E			● <sup>2)</sup>	● <sup>2)</sup>					●	●			●	●	●		●	●	●
ES									●	●			●	●	●				
K																			
R/RS																●			
UBM																			
UE	● <sup>1)</sup>			● <sup>1)</sup>	● <sup>1)</sup>						● <sup>1)</sup>					●	●	●	●
V											●	●							
C	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
D	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
F			●	●					●	●			●	●	●	●	●	●	●
LE	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LZ	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
UF	● <sup>1)</sup>			● <sup>1)</sup>	● <sup>1)</sup>						● <sup>1)</sup>					●	●	●	●
VE											●	●							
VZ											●	●							
GC	●	●			●		●	●	●	●	●	●	●	●	●	●	●	●	●
GW	●						●	●											
CD	●	●			●		●	●	●	●	●	●	●	●	●	●	●	●	●
CJ/CS	●	●			●		●	●	●	●	●	●	●	●	●	●	●	●	●
CM	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●
FJ/FD/ FS					●	●			●	●						●	●	●	●
M	●						●												
LEM	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●


<sup>1)</sup> Can only be used for suction operation

<sup>2)</sup> Use VMF 16 E.0 only


### 3. SPECIFICATIONS

#### 3.1 VACUUM INDICATORS


##### VMF x UE.x

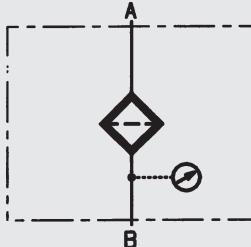


Type of indication	visual-analogue, scale indication
Weight	53 g
Pressure setting or indication range	-1 bar to 0 bar
Permitt. operating pressure	-0.7 to 0 bar continuous
Permitt. temperature range	-20 °C to +60 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VMF 1 UE.0

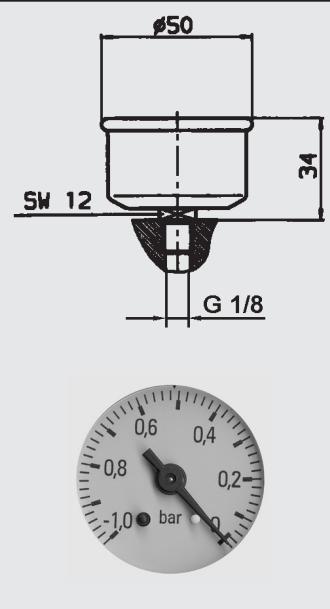


##### VR x UE.x

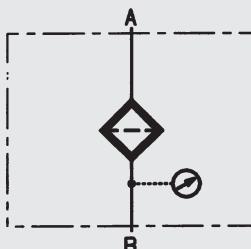


Type of indication	visual-analogue, scale indication
Weight	125 g
Pressure setting or indication range	-1 bar to 0 bar
Permitt. operating pressure	-0.7 to 0 bar continuous
Permitt. temperature range	-20 °C to +60 °C
Thread	G 1/2
Max. torque	30 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VR 1 UE.0

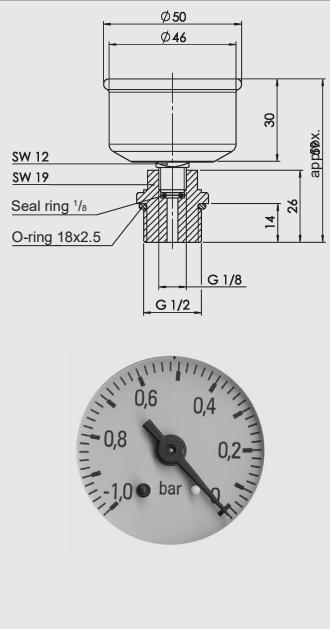


##### VRD x UE.x

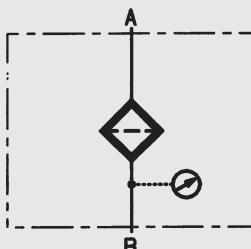


Type of indication	visual-analogue, scale indication
Weight	133 g
Pressure setting or indication range	-1 bar to 0 bar
Permitt. operating pressure	-0.7 to 0 bar continuous
Permitt. temperature range	-20 °C to +60 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VRD 1 UE.0

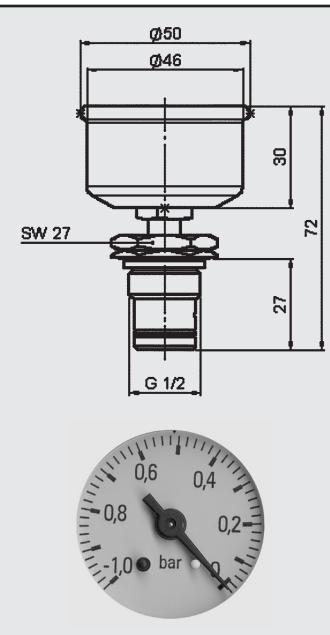


## VMF x UF.x

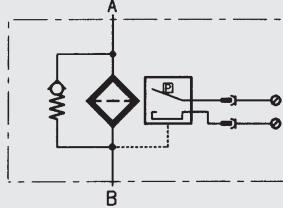


Type of indication	electrical switch
Weight	75 g
Pressure setting or indication range	-0.2 bar $\pm 0.1$ bar
Permitt. operating pressure	40 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	N/O contact (N/C as an option)
Max. switching voltage	48 V
Electrical connection	threaded connection
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~
Protection class to DIN 40050	IP 65, terminals IP 00
Order example	VMF 0.2 UF.1

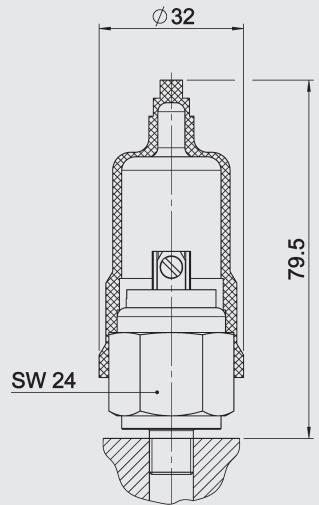


## VR x UF.x

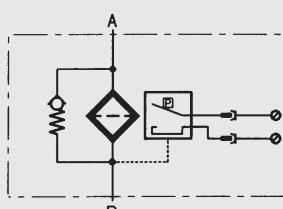


Type of indication	electrical switch
Weight	146 g
Pressure setting or indication range	-0.2 bar $\pm 0.1$ bar
Permitt. operating pressure	40 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	30 Nm
Switching type	N/O contact (N/C as an option)
Max. switching voltage	48 V
Electrical connection	threaded connection
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~
Protection class to DIN 40050	IP 65, terminals IP 00
Order example	VR 0.2 UF.1

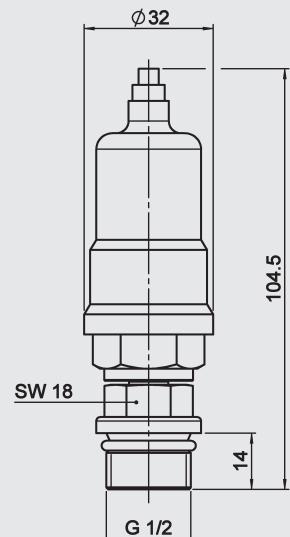

## VRD x UF.x

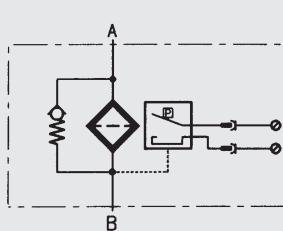


Type of indication	electrical switch
Weight	154 g
Pressure setting or indication range	-0.2 bar $\pm 0.1$ bar
Permitt. operating pressure	40 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/O contact (N/C as an option)
Max. switching voltage	48 V
Electrical connection	threaded connection
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~
Protection class to DIN 40050	IP 65, terminals IP 00
Order example	VRD 0.2 UF.1

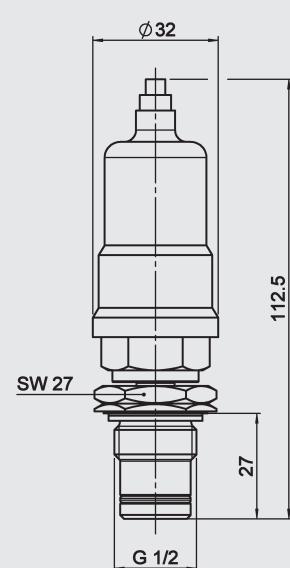


## VMF x UBM.x




Type of indication	visual, yellow pin
Weight	54 g
Pressure setting or indication range	-0.035 bar
Permitt. operating pressure	1 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	M10 x 1
Max. torque	2 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VMF 0.035 UBM.0

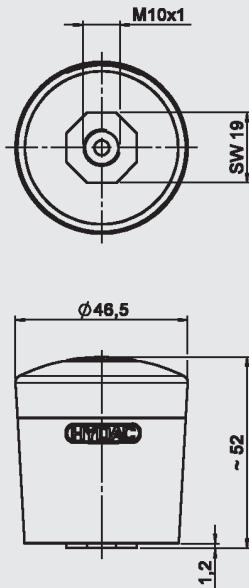

## VMF x UED.x


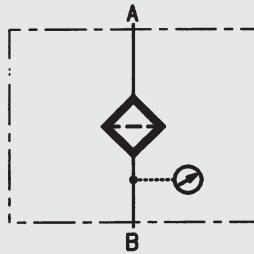



Type of indication	visual-analogue, scale indication (filled with silicone oil)
Weight	85 g
Pressure setting or indication range	-1 bar to 0 bar
Permitt. operating pressure	-0.7 to 0 bar continuous
Permitt. temperature range	-20 °C to +90 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VMF 1 UED.0

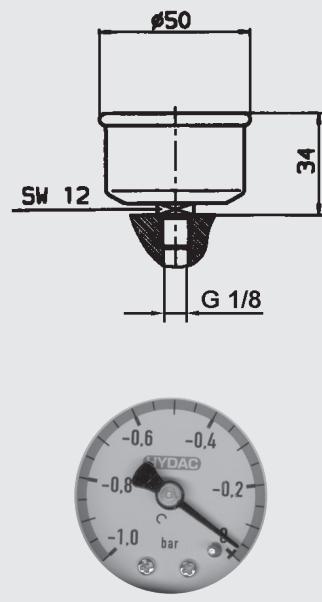


### 3.2 RETURN LINE INDICATORS


#### VMF x B.x

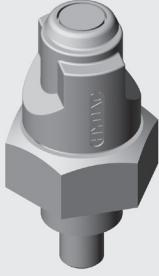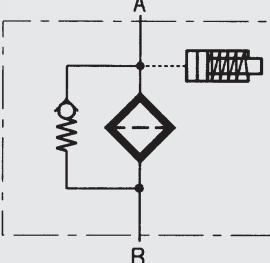 	Type of indication	visual, red pin
	Weight	81 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VMF 2 B.1


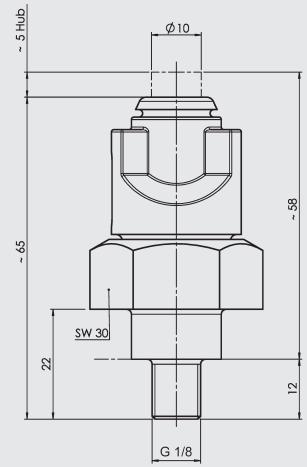



#### VR x B.x

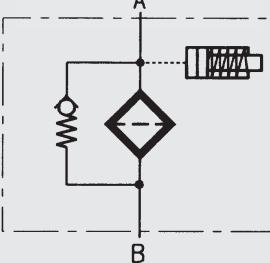 	Type of indication	visual, red pin
	Weight	42 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VR 2 B.1

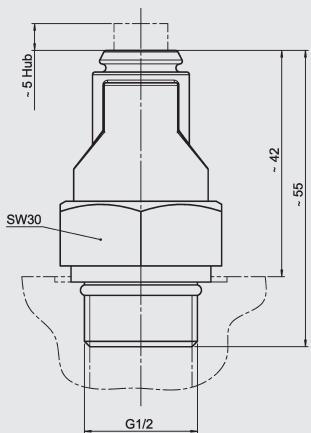

#### VMF x C.x

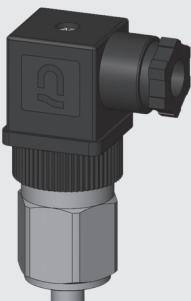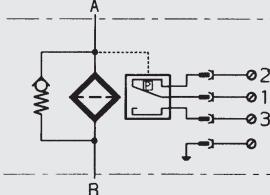 	Type of indication	electrical switch
	Weight	121 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	230 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 C.1

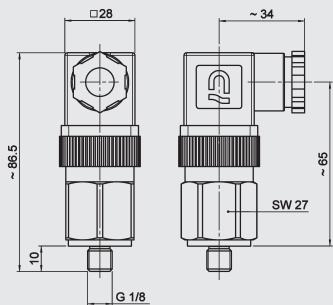

## VR x C.x

	Type of indication	electrical switch
	Weight	192 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	230 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VR 2 C.1



## VRD x C.x

	Type of indication	electrical switch
	Weight	208 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	230 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VRD 2 C.1


## VMF x D.x /-L...

	Type of indication	visual indicator and electrical switch
	Weight	127 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 230 V = Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 D.1 /-L24



## VR x D.x /-L...

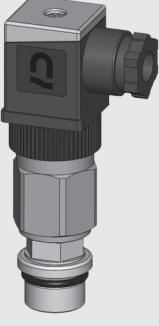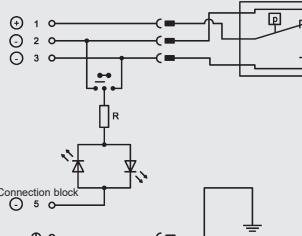  <p>Connection block</p>	Type of indication	visual indicator and electrical switch
	Weight	200 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VR 2 D.1 /-L110

## VRD x D.x /-L...

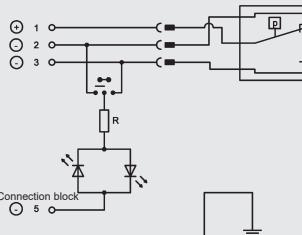
  <p>Connection block</p>	Type of indication	visual indicator and electrical switch
	Weight	215 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VRD 2 D.1 /-L110

## VMF x D.x /-LED

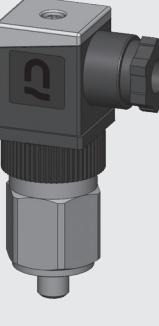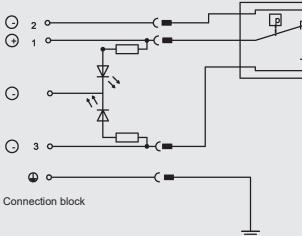  <p>Connection block</p>	Type of indication	visual indicator and electrical switch
	Weight	120 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/O contact
	Max. switching voltage	24 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 D.1 /-LED


## VR x D.x /-LED

  <b>Connection block</b>	Type of indication	visual indicator and electrical switch
	Weight	191 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O contact
	Max. switching voltage	24 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VR 2 D.1 /-LED

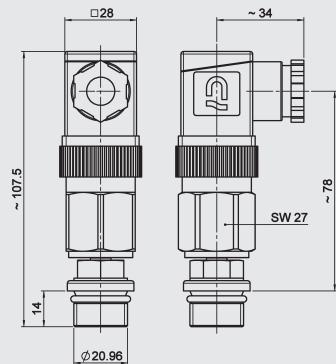


## VRD x D.x /-LED

  <b>Connection block</b>	Type of indication	visual indicator and electrical switch
	Weight	207 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O contact
	Max. switching voltage	24 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VRD 2 D.1 /-LED


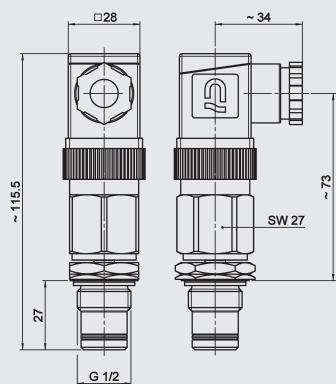


## VMF x E.x



 	Type of indication	visual-analogue, scale indication
	Weight	54 g
	Pressure setting or indication range	0 bar to +10 bar
	Permitt. operating pressure	7 bar continuous
	Permitt. temperature range	-20 °C to +60 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VMF 2 E.0

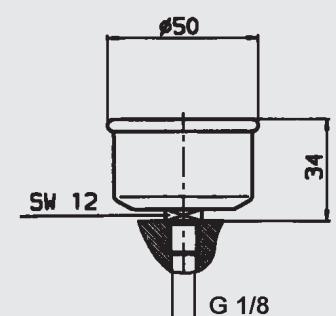



## VMF 16 E.x

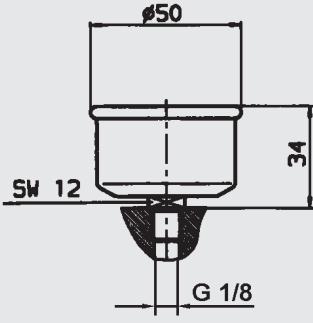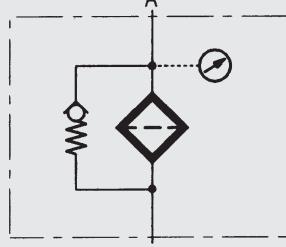	Type of indication visual-analogue, scale indication	
	Weight 55 g	
	Pressure setting or indication range 0 bar to +16 bar	
	Permitt. operating pressure 11 bar continuous	
	Permitt. temperature range -20 °C to +60 °C	
	Thread G 1/8	
	Max. torque 10 Nm	
	Switching type -	
	Max. switching voltage -	
	Electrical connection -	
	Max. switching voltage at resistive load -	
	switching capacity -	
	Protection class to DIN 40050 -	
	Order example VMF 16 E.0	


## VR x E.x

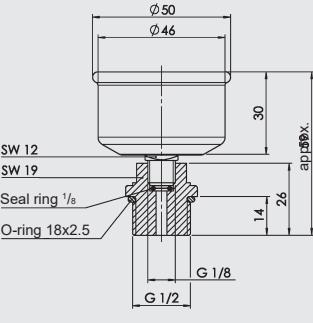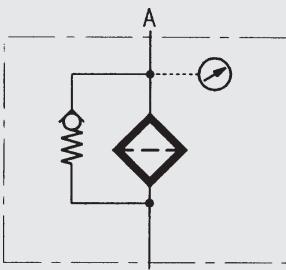	Type of indication visual-analogue, scale indication	
	Weight 125 g	
	Pressure setting or indication range 0 bar to +10 bar	
	Permitt. operating pressure 7 bar continuous	
	Permitt. temperature range -20 °C to +60 °C	
	Thread G 1/2	
	Max. torque 33 Nm	
	Switching type -	
	Max. switching voltage -	
	Electrical connection -	
	Max. switching voltage at resistive load -	
	switching capacity -	
	Protection class to DIN 40050 -	
	Order example VR 2 E.0	



## VRD x E.x

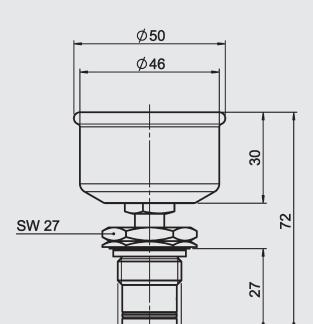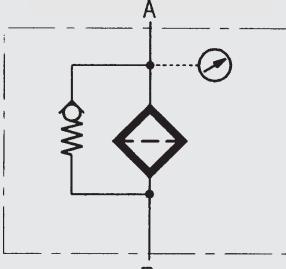	Type of indication visual-analogue, scale indication	
	Weight 141 g	
	Pressure setting or indication range 0 bar to +10 bar	
	Permitt. operating pressure 7 bar continuous	
	Permitt. temperature range -20 °C to +60 °C	
	Thread G 1/2	
	Max. torque 33 Nm	
	Switching type -	
	Max. switching voltage -	
	Electrical connection -	
	Max. switching voltage at resistive load -	
	switching capacity -	
	Protection class to DIN 40050 -	
	Order example VRD 2 E.0	


## VMF x ES.x

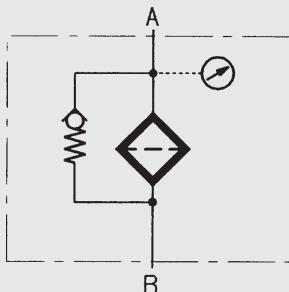


Type of indication	visual-analogue, scale indication
Weight	59 g
Pressure setting or indication range	0 bar to +10 bar
Permitt. operating pressure	7 bar continuous
Permitt. temperature range	-20 °C to +60 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VMF 2 ES.0

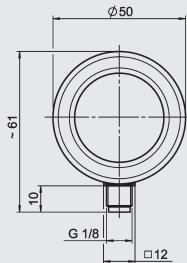


## VR x ES.x

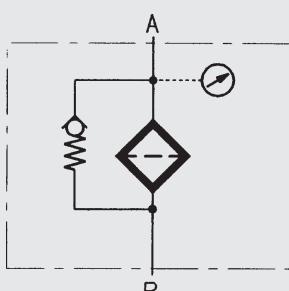


Type of indication	visual-analogue, scale indication
Weight	130 g
Pressure setting or indication range	0 bar to +10 bar
Permitt. operating pressure	7 bar continuous
Permitt. temperature range	-20 °C to +60 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VR 2 ES.0

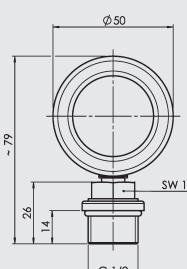


## VRD x ES.x

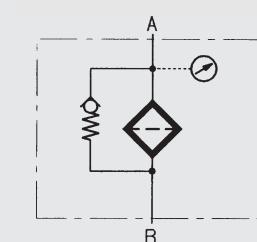


Type of indication	visual-analogue, scale indication
Weight	146 g
Pressure setting or indication range	0 bar to +10 bar
Permitt. operating pressure	7 bar continuous
Permitt. temperature range	-20 °C to +60 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VRD 2 ES.0

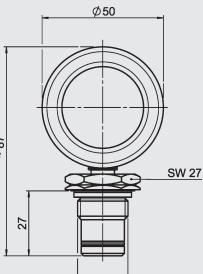


## VMF x F.x

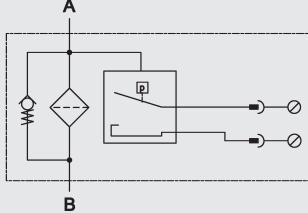


Type of indication	electrical switch
Weight	71 g
Pressure setting or indication range	2 bar $\pm 0.3$ bar
Permitt. operating pressure	40 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	N/O contact (N/C as an option)
Max. switching voltage	42 V
Electrical connection	threaded connection
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	Ohmic 2.5 A at 24 V = Ohmic 2.5 A at 42 V ~
Protection class to DIN 40050	IP 65, terminals IP 00
Order example	VMF 2 F.0

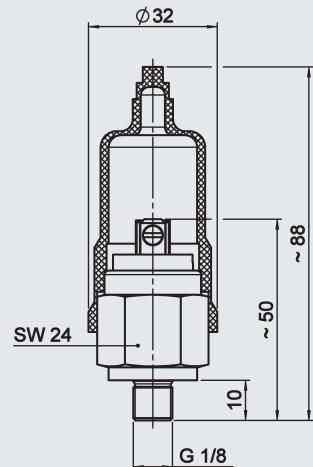


## VR x F.x

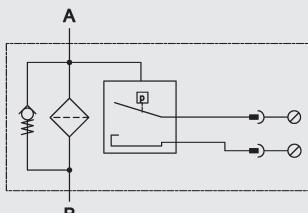


Type of indication	electrical switch
Weight	142 g
Pressure setting or indication range	2 bar $\pm 0.3$ bar
Permitt. operating pressure	40 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/O contact (N/C as an option)
Max. switching voltage	42 V
Electrical connection	threaded connection
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	Ohmic 2.5 A at 24 V = Ohmic 2.5 A at 42 V ~
Protection class to DIN 40050	IP 65, terminals IP 00
Order example	VR 2 F.0

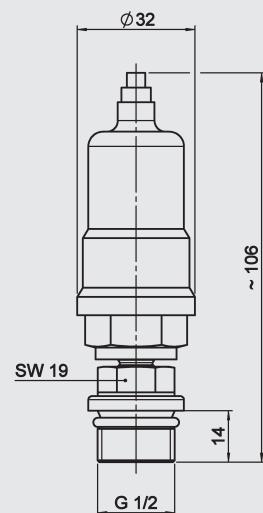

## VRD x F.x

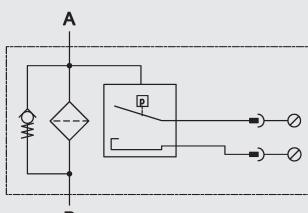

Type of indication	electrical switch
Weight	158 g
Pressure setting or indication range	2 bar $\pm 0.3$ bar
Permitt. operating pressure	40 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/O contact (N/C as an option)
Max. switching voltage	42 V
Electrical connection	threaded connection
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	Ohmic 2.5 A at 24 V = Ohmic 2.5 A at 42 V ~
Protection class to DIN 40050	IP 65, terminals IP 00
Order example	VRD 2 F.1

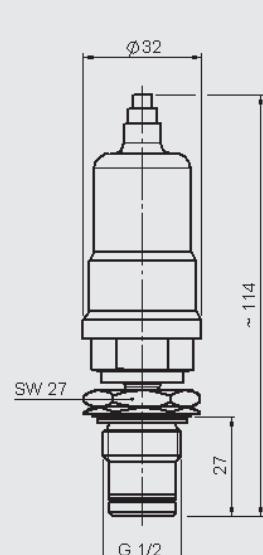

## VR x GC.x

 	Type of indication	Electronic/analogue (4-20 mA or 1-10 V) 1 electrical switching contact at 75% and at 100% of the pressure setting Analogue signal up to 20% of the pressure setting constant 4mA or 1 V
	Weight	340 g
	Pressure setting or indication range	2 bar -10%
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +80 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	N/C or N/O, electronic PNP positive switching (factory setting)
	Max. switching voltage	Operating voltage 20-30 V DC
	Electrical connection	7 pole plug to DIN 43651; PG 11
	Max. switching voltage at resistive load	12 W
	switching capacity	Ohmic 0.4 A at 30 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VR 2 GC.0 /-LED-SQ-123



## VMF x K.x

 	Type of indication	visual-analogue, scale indication
	Weight	54 g
	Pressure setting or indication range	-1 bar to + 0.6 bar
	Permitt. operating pressure	-0.7 to +0.4 bar continuous
	Permitt. temperature range	-20 °C to +60 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VMF 0.6 K.0


## VMF x LE.x

 	Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting
	Weight	176 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage	115 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 LE.1



## VR x LE.x

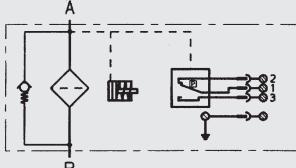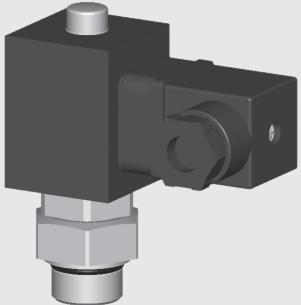


Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting
Weight	137 g
Pressure setting or indication range	2 bar -0.2 bar
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	15 Nm
Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
Max. switching voltage	115 V
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VR 2 LE.1

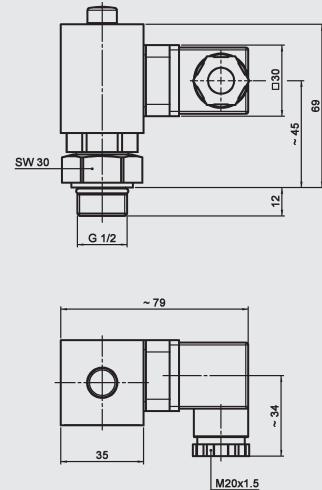



## VMF x LZ.x

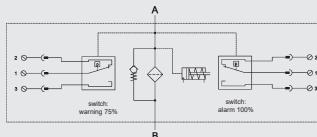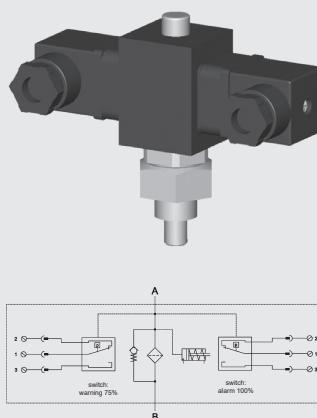


Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting
Weight	230 g
Pressure setting or indication range	2 bar -0.2 bar
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
Max. switching voltage	115 V
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VMF 2 LZ.1

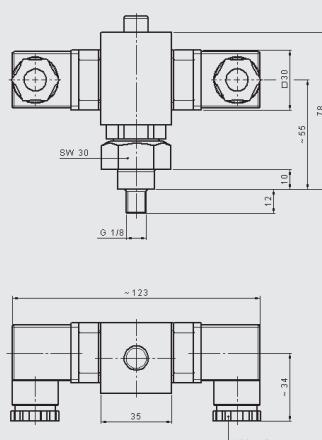



## VR x LZ.x

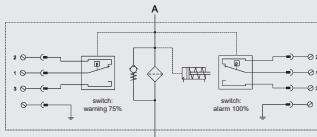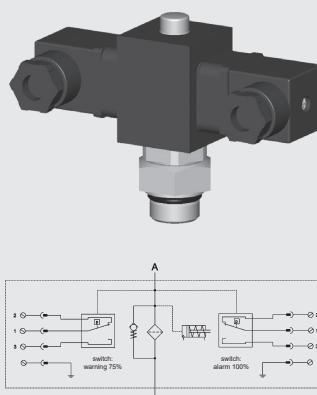



Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting
Weight	190 g
Pressure setting or indication range	2 bar -0.2 bar
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	15 Nm
Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
Max. switching voltage	115 V
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VR 2 LZ.1

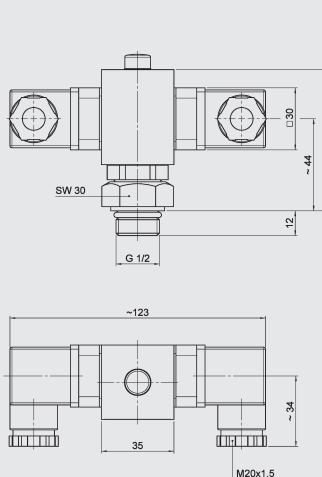



## VMF x LZ.x /-DB

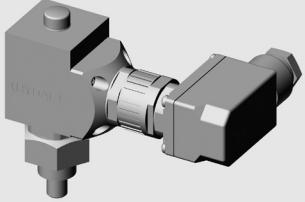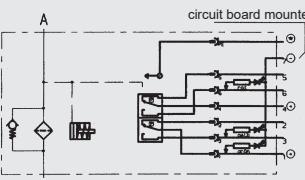	Type of indication visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
	Weight 170 g
	Pressure setting or indication range 2 bar -0.2 bar
	Permitt. operating pressure 7 bar
	Permitt. temperature range -10 °C to +100 °C
	Thread G 1/8
	Max. torque 10 Nm
	Switching type N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage 24 V
	Electrical connection Male connection PG 11 Female connector to DIN 43651
	Max. switching voltage at resistive load 15 W = max. 15 VA ~
	switching capacity Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050 IP 65 (only if the connector is wired and fitted correctly)
	Order example VMF 2 LZ.1 /-DB




## VR x LZ.x /-DB

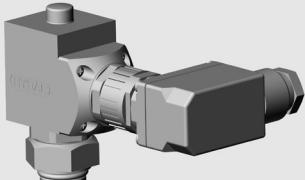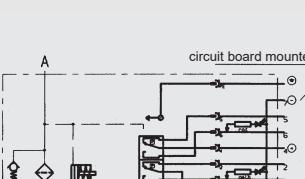
	Type of indication visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
	Weight 190 g
	Pressure setting or indication range 2 bar -0.2 bar
	Permitt. operating pressure 7 bar
	Permitt. temperature range -10 °C to +100 °C
	Thread G 1/2
	Max. torque 15 Nm
	Switching type N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage 24 V
	Electrical connection Male connection PG 11 Female connector to DIN 43651
	Max. switching voltage at resistive load 15 W = max. 15 VA ~
	switching capacity Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050 IP 65 (only if the connector is wired and fitted correctly)
	Order example VR 2 LZ.1 /-DB

## VMF x LZ.x /-CN

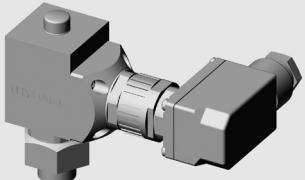
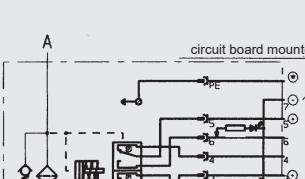
	Type of indication visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED goes out at 75% 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
	Weight 170 g
	Pressure setting or indication range 2 bar -0.2 bar
	Permitt. operating pressure 7 bar
	Permitt. temperature range -10 °C to +100 °C
	Thread G 1/8
	Max. torque 10 Nm
	Switching type N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage 24 V
	Electrical connection Male connection PG 11 Female connector to DIN 43651
	Max. switching voltage at resistive load 15 W = max. 15 VA ~
	switching capacity Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050 IP 65 (only if the connector is wired and fitted correctly)
	Order example VMF 2 LZ.1 /-CN


## VR x LZ.x /-CN

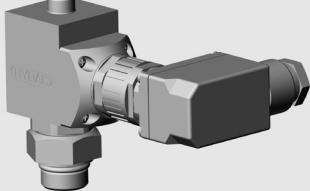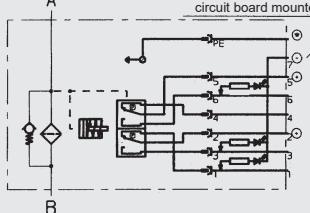  	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED goes out at 75% 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
	Weight	190 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage	24 V
	Electrical connection	Male connection PG 11 Female connector to DIN 43651
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VR 2 LZ.1 /-CN

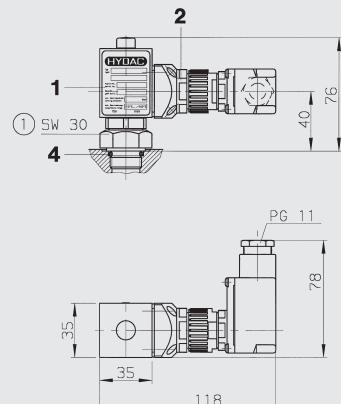



## VMF x LZ.x /-BO

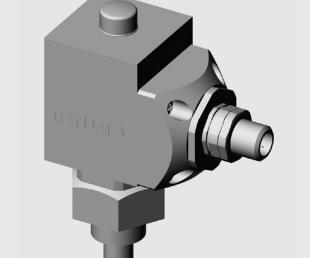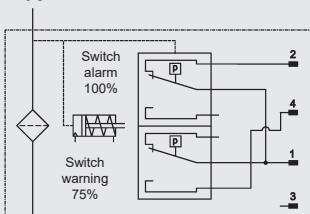  	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting
	Weight	120 g
	Pressure setting or indication range	2 bar (or 2.5 bar) -10%
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/O (75%) N/C (100%)
	Max. switching voltage	24 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65
	Order example	VMF 2 LZ.1 /-BO

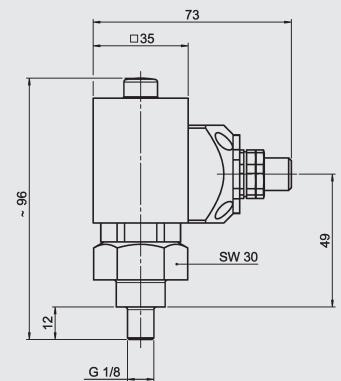


## VR x LZ.x /-BO

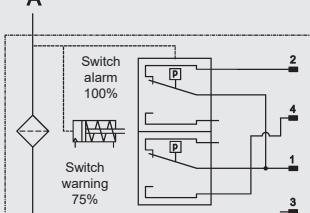
  	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting
	Weight	145 g
	Pressure setting or indication range	2 bar (or 2.5 bar) -10%
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	N/O (75%) N/C (100%)
	Max. switching voltage	24 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65
	Order example	VR 2 LZ.1 /-BO

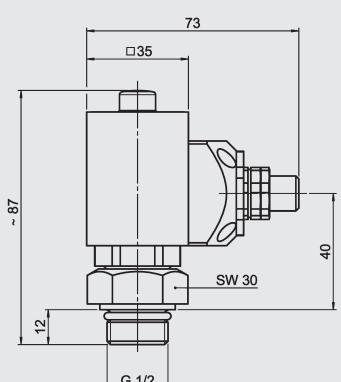

## VMF x LZ.x /-AV

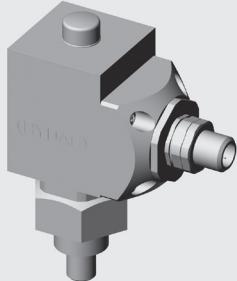


A

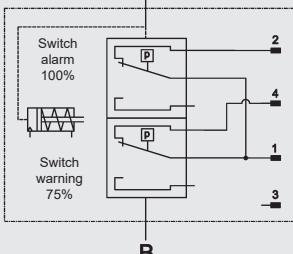

B


Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting
Weight	120 g
Pressure setting or indication range	2 bar (or 2.5 bar) -10%
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	N/C (75% and 100%)
Max. switching voltage	24 V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VMF 2 LZ.1 /-AV

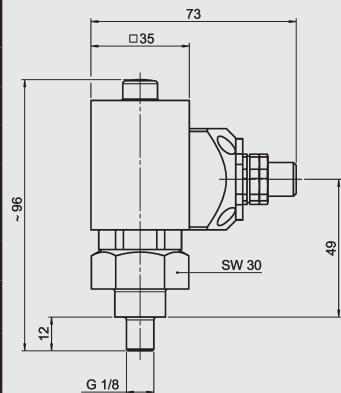

## VR x LZ.x /-AV




A


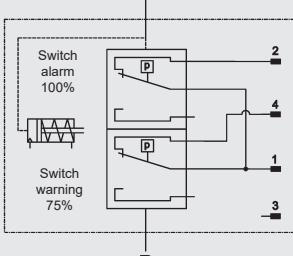


B


Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting
Weight	145 g
Pressure setting or indication range	2 bar (or 2.5 bar) -10%
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	15 Nm
Switching type	N/C (75% and 100%)
Max. switching voltage	24 V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VR 2 LZ.1 /-AV

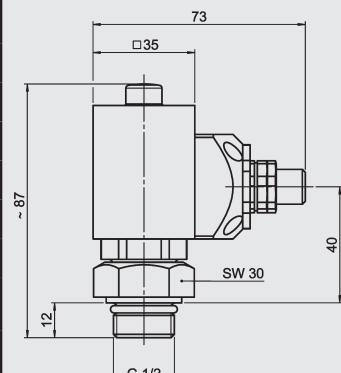



## VMF x LZ.x /-D4C

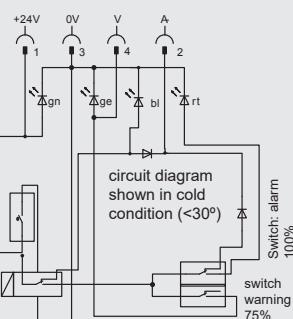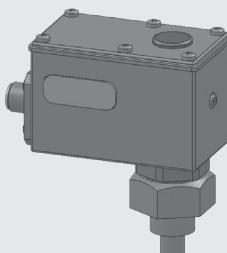


Type of indication	1 electrical switching contact at 75% and 100% of the pressure setting and suppression of the switching signal up to approx. 30 °C 2 green LED's light when below 30 °C 1 green LED lights from 30 °C 1 yellow LED lights from 75% 1 redLED lights from 100% Δp
Weight	245 g
Pressure setting or indication range	2.5 bar -10%
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	N/O (75%) N/C (100%)
Max. switching voltage	24 V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VMF 2 LZ.2 /-D4C

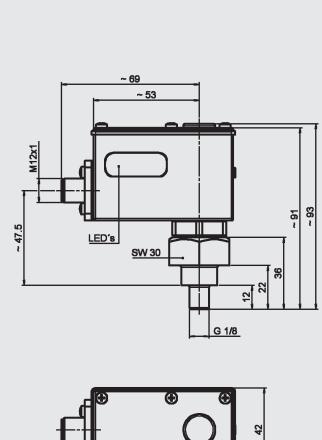



## VR x LZ.x /-D4C

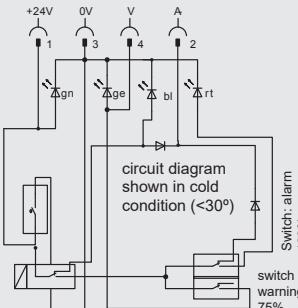


Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting and suppression of the switching signal up to approx. 30 °C. 2 green LED's light when below 30 °C 1 green LED lights from 30 °C 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
Weight	205 g
Pressure setting or indication range	2.5 bar -10%
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	15 Nm
Switching type	N/O (75%) N/C (100%)
Max. switching voltage	24 V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VR 2 LZ.2 /-D4C

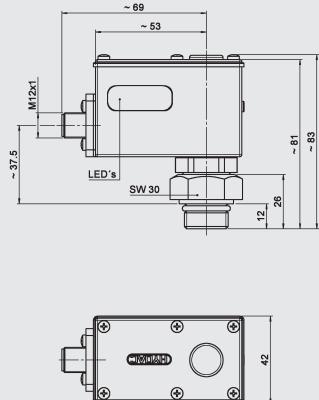



## VMF x LZ.x /-BO-LED

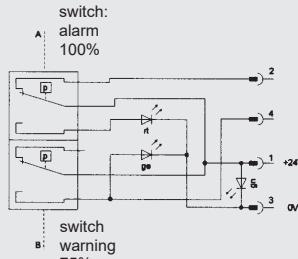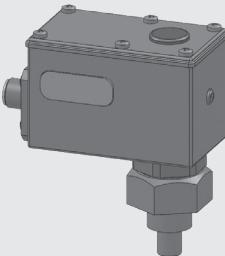


Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
Weight	245 g
Pressure setting or indication range	2.5 bar -10%
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/8
Max. torque	10 Nm
Switching type	N/O (75%), N/C (100%)
Max. switching voltage	24 V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VMF 2 LZ.2 /-BO-LED

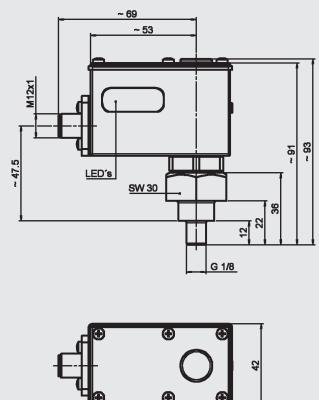



## VR x LZ.x /-BO-LED

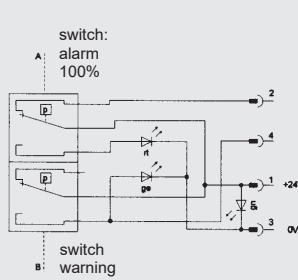


Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
Weight	205 g
Pressure setting or indication range	2.5 bar -10%
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	15 Nm
Switching type	N/O (75%), N/C (100%)
Max. switching voltage	24 V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VR 2 LZ.2 /-BO-LED

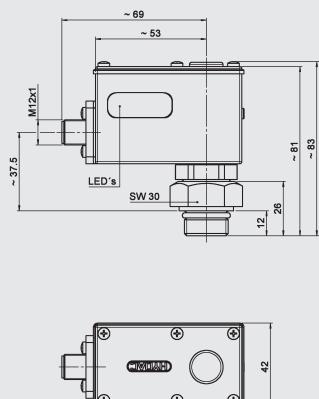


## VR x LZ.x /-GM

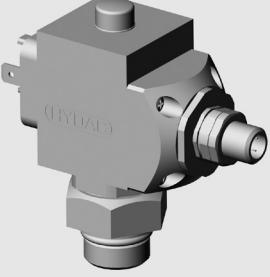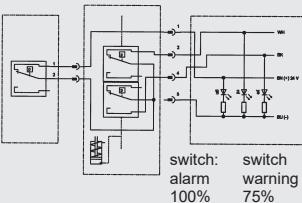 	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting Indicator function possible in conjunction with the "No element" indicator
	Weight	290 g
	Pressure setting or indication range	2.5 bar -10%
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	-
	Max. switching voltage	24 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65
	Order example	VR 2 LZ.1 /-GM

## VMF x R.x


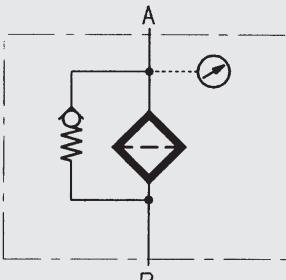
 	Type of indication	visual-analogue, scale indication
	Weight	54 g
	Pressure setting or indication range	0 to 10 bar
	Permitt. operating pressure	7 bar continuous
	Permitt. temperature range	-20 °C to +60 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VMF 2 R.0


## VR x R.x

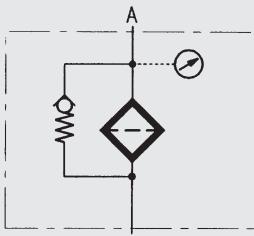 	Type of indication	visual-analogue, scale indication
	Weight	125 g
	Pressure setting or indication range	0 to 10 bar
	Permitt. operating pressure	7 bar continuous
	Permitt. temperature range	-20 °C to +60 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VR 2 R.0



### 3.3 DIFFERENTIAL PRESSURE INDICATORS


VM x B.x

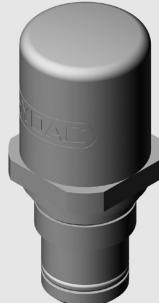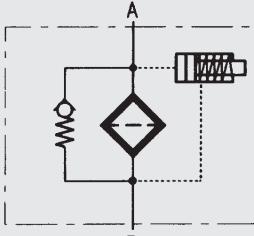 	Type of indication	visual, red/green band Automatic reset
	Weight	55 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VM 5 B.1

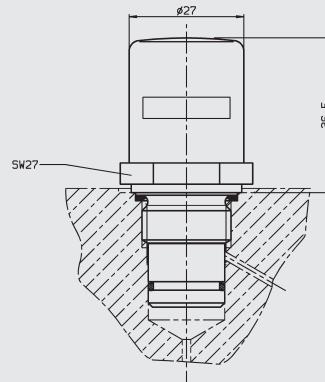



VD x B.x

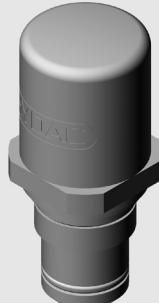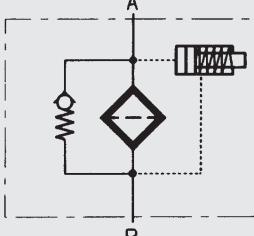 	Type of indication	visual, red/green band Automatic reset
	Weight	110 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VD 5 B.1

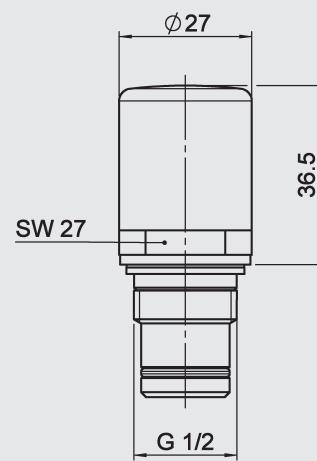


VM x BM.x

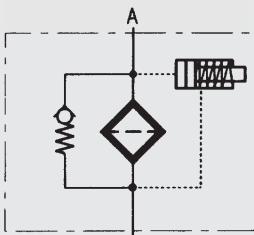
 	Type of indication	visual, red/green band Manual reset
	Weight	55 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VM 5 BM.1

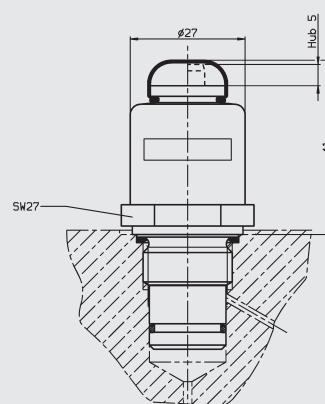



## VD x BM.x

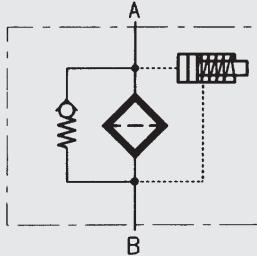


Type of indication	visual, red/green band Manual reset
Weight	110 g
Pressure setting or indication range	2 bar -10 % 5 bar -10% 8 bar ±10%
Permitt. operating pressure	420 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	100 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VD 5 BM.1

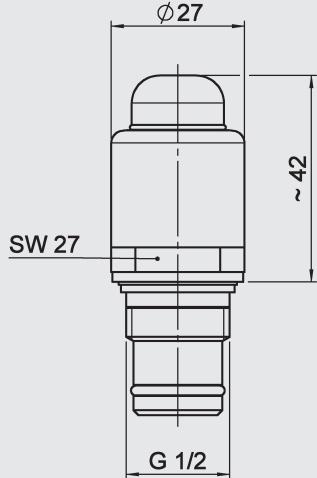



## VM x C.x

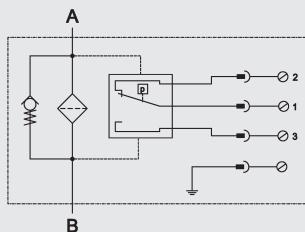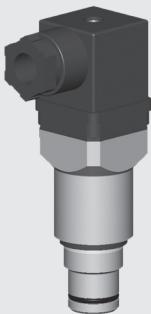


Type of indication	electrical switch
Weight	120 g
Pressure setting or indication range	2 bar -10 % 5 bar -10% 8 bar ±10%
Permitt. operating pressure	210 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/C or N/O (change-over contacts)
Max. switching voltage	230 V
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	60 W = 100 VA ~
Switching capacity <sup>1)</sup>	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VM 5 C.0

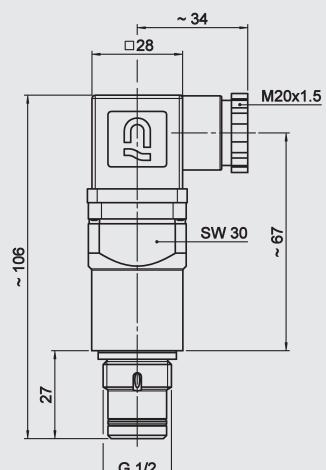

## VD x C.x

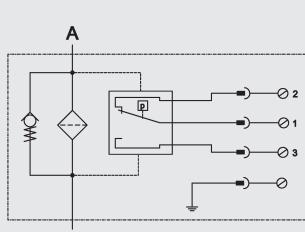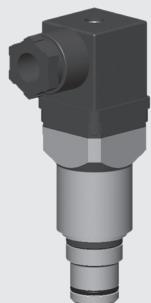


Type of indication	electrical switch
Weight	220 g
Pressure setting or indication range	5 bar -10 % 8 bar ±10%
Permitt. operating pressure	420 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	100 Nm
Switching type	N/C or N/O (change-over contacts)
Max. switching voltage	230 V
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	60 W = 100 VA ~
Switching capacity <sup>1)</sup>	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VD 5 C.0

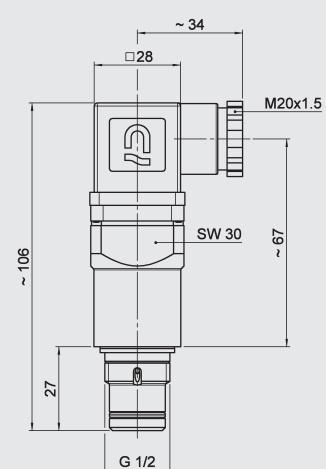


<sup>1)</sup> Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).


## VM x D.x /-L...

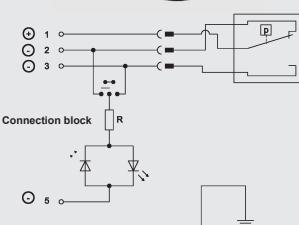


Type of indication	visual indicator and electrical switch
Weight	150 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
Permitt. operating pressure	210 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/C or N/O (change-over contacts)
Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	60 W = 100 VA ~
Switching capacity <sup>1)</sup>	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VM 5 D.0 /-L24

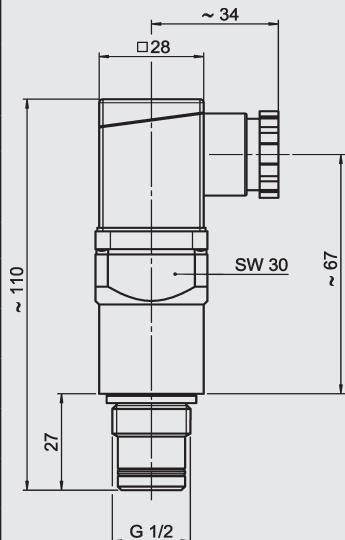


## VD x D.x /-L...

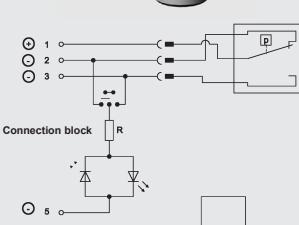


Type of indication	visual indicator and electrical switch
Weight	250 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
Permitt. operating pressure	420 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	100 Nm
Switching type	N/C or N/O (change-over contacts)
Max. switching voltage	24, 48, 115, 230 V (depending on the type of light insert)
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	60 W = 100 VA ~
Switching capacity <sup>1)</sup>	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VD 5 D.0 /-L24

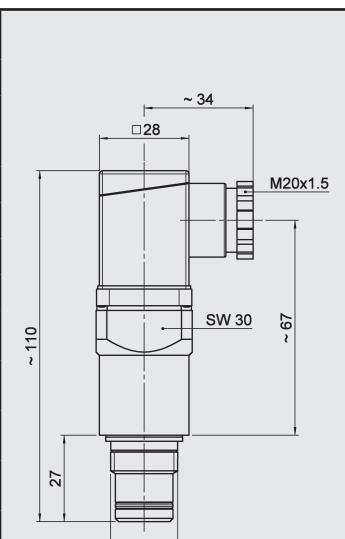

## VM x D.x /-LED

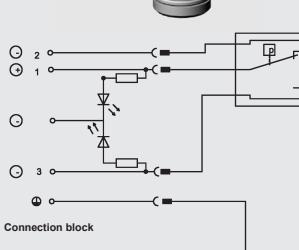


Type of indication	visual indicator and electrical switch
Weight	150 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
Permitt. operating pressure	210 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/C or N/O (change-over contacts)
Max. switching voltage	24 V
Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
Max. switching voltage at resistive load	60 W = 100 VA ~
Switching capacity <sup>1)</sup>	ohmic 3 A at 24 V =
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
Order example	VM 5 D.0 /-LED

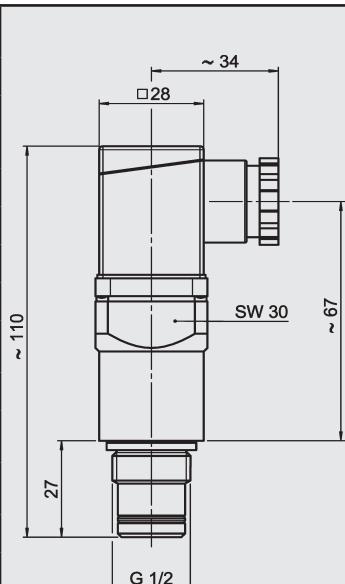


<sup>1)</sup> Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).


## VD x D.x /-LED

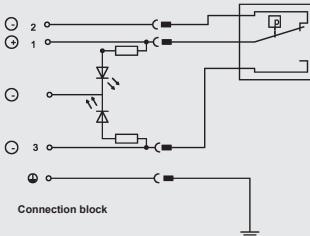
	Type of indication	visual indicator and electrical switch
	Weight	250 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	24 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	60 W = 100 VA ~
	Switching capacity <sup>1)</sup>	ohmic 3 A at 24 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 D.0 /-LED

## VD x GC.x

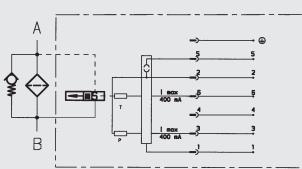	Type of indicator	Electronic/analogue (4-20 mA or 1-10 V) 1 electrical switching contact at 75% and at 100% of the pressure setting Analogue signal up to 20% of the pressure setting constant 4mA or 1 V
	Weight	400 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-30 °C to +80 °C
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	N/C or N/O, electronic PNP positive switching (factory setting)
	Max. switching voltage	Operating voltage 20 to 30 V DC
	Electrical connection	7 pole plug to DIN 43651; PG 11
	Max. switching voltage at resistive load	12 W
	switching capacity	ohmic 0.4 A at 30 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 GC.0 /-LED-SQ-123

## VL x GW.x

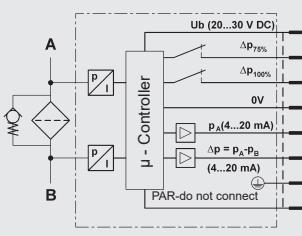	Type of indication	Electronic/analogue (4-20 mA) for condition monitoring filters incl. bypass monitoring. 1 switching contact at 75% and at 100% of the pressure setting
	Weight	157 g
	Pressure setting p (switching contact 100%)	2 bar ±5%    3 bar ±5%    5 bar ±5%
	Indication range Δp	0 to 5 bar    0 to 5 bar    0 to 8 bar
	Indication range "pressure before filter"	25 bar
	Type of switching switching outputs Δp	electronic switch, PNP positive switching N/O or N/C contacts (factory setting)
	Output Load	400 mA
	Max. switching voltage / operating voltage	20 to 30 V DC
	Analogue outputs "press. before filter" & Δp	4 to 20 mA (max. resistance 600Ω)
	Electrical connection	M12 x 1 / 8 pole
	Protection class to DIN 40050	IP 65
	Permitt. operating pressure	25 bar
	Permitt. temperature range	-40 °C to +85 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Order example	VL 5 GW.0 /-V-123

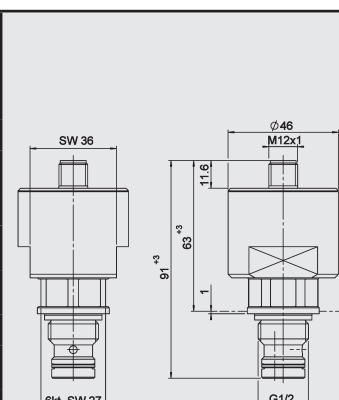

<sup>1)</sup> Required amperage > 20 mA; for lower amperages, order "-SO135" indicators (see Supplementary details).

## VD x LE.x

	Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting
	Weight	198 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage	115 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 LE.1



## VD x LZ.x

	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting
	Weight	240 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage	115 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 LZ.1



## VD x LZ.x /-DB

	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% Δp
	Weight	245 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage	24 V
	Electrical connection	Male connection PG 11 Female connector to DIN 43651
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 LZ.1 /-DB



## VD x LZ.x /-CN

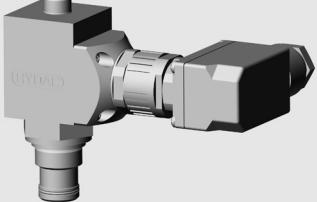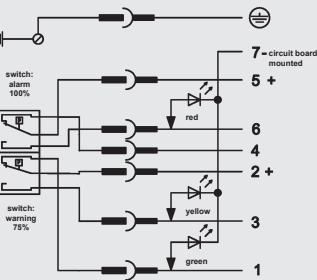	Type of indication	visual, red pin and 1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED goes out at 75% 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
	Weight	245 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
	Max. switching voltage	24 V
	Electrical connection	Male connection PG 11 Female connector to DIN 43651
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 LZ.1 /-CN

## VD x LZ.x /-BO

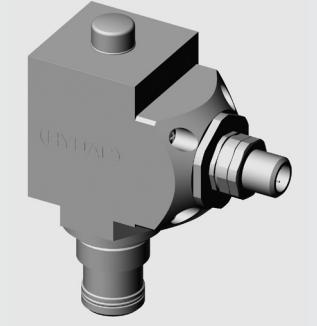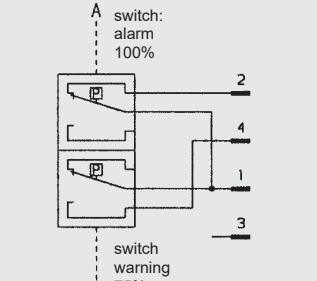
	Type of indication	visual, red pin and one electrical switching contact at 75% and at 100% of the pressure setting
	Weight	197 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/O (75%) N/C (100%)
	Max. switching voltage	24 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65
	Order example	VD 5 LZ.1 /-BO

## VD x LZ.x /-AV

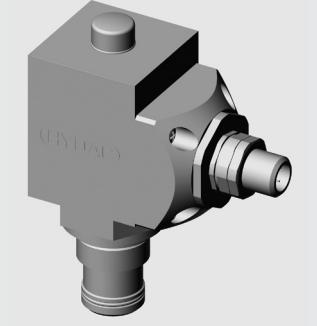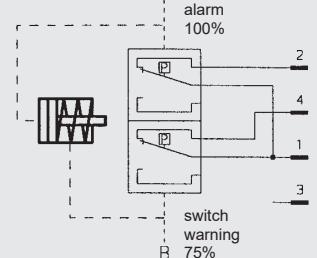	Type of indication	visual, red pin and one electrical switching contact at 75% and at 100% of the pressure setting
	Weight	197 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/C (75% and 100%)
	Max. switching voltage	24 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65
	Order example	VD 5 LZ.1 /-AV


## VD x LZ.x /-D4C

 <p>circuit diagram shown in cold condition (&lt;30°)</p>	Type of indicator	1 electrical switching contact at 75% and at 100% of the pressure setting and suppression of the switching signal when operating temperature is below 30 °C 2 green LEDs light when below 30 °C 1 green LED lights from 30 °C 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
	Weight	256 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/O (75%) N/C (100%)
	Max. switching voltage	24 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65
	Order example	VD 5 LZ.2 /-D4C

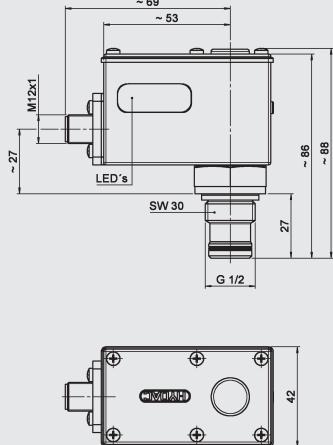


## VD x LZ.x /-BO-LED

 <p>switch: alarm 100%</p> <p>switch warning 75%</p>	Type of indication	1 electrical switching contact at 75% and at 100% of the pressure setting 1 green LED constantly lit 1 yellow LED lights from 75% 1 red LED lights from 100% $\Delta p$
	Weight	250 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	50 Nm
	Switching type	N/O (75%) N/C (100%)
	Max. switching voltage	24 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	15 W = max. 15 VA ~
	switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
	Protection class to DIN 40050	IP 65
	Order example	VD 5 LZ.2 /-BO-LED

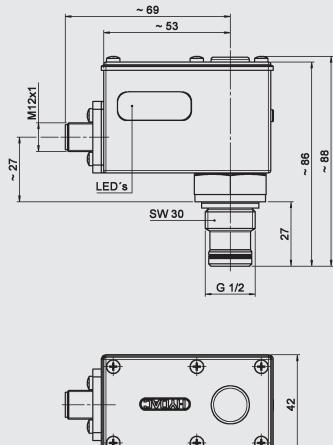


## V02 x V.x


 <p>A</p> <p>B</p>	Type of indication	visual-analogue
	Weight	580 g
	Pressure setting or indication range	0.8 bar $\pm$ 10% 2.0 bar $\pm$ 10% 4.3 bar $\pm$ 10%
	Permitt. operating pressure	100 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/4
	Max. torque	-
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	V02 2 V.0

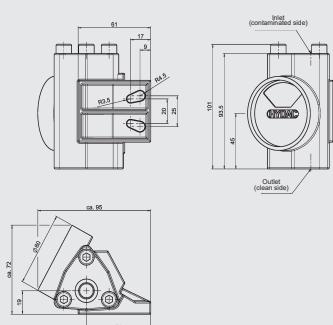



## V02 x VE.x

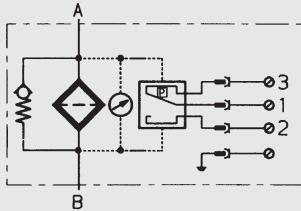


Type of indication	Visual/analogue indicator and electrical switching contact 100% of the pressure setting
Weight	640 g
Pressure setting or indication range	0.8 bar $\pm 10\%$ 2.0 bar $\pm 10\%$ 4.3 bar $\pm 10\%$
Permitt. operating pressure	100 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/4
Max. torque	-
Switching type	100% change-over contact
Max. switching voltage	250 V
Electrical connection	threaded connection M16 x 1.5
Max. switching voltage at resistive load	100% contact 30 W = 60 VA ~
switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~
Protection class to DIN 40050	IP 65
Order example	V02 2 VE.0

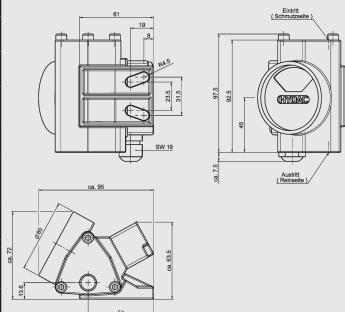

## V02 x VZ.x

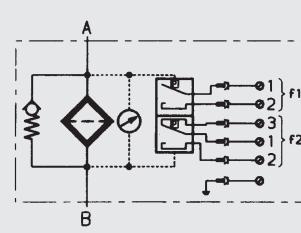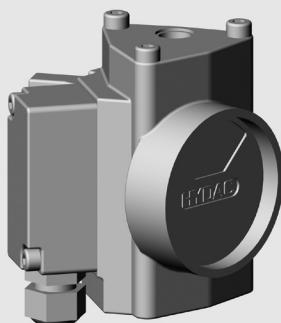


Type of indication	Visual/analogue indicator and 1 electrical switching contact at 75% and 100% of the pressure setting
Weight	650 g
Pressure setting or indication range	0.8 bar $\pm 10\%$ 2.0 bar $\pm 10\%$ 4.3 bar $\pm 10\%$
Permitt. operating pressure	100 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/4
Max. torque	-
Switching type	75% - N/O contact 100% - change-over contact
Max. switching voltage	250 V
Electrical connection	threaded connection M16 x 1.5
Max. switching voltage at resistive load	75% contact 120 W = 120 VA ~      100% contact 30 W = 60 VA ~
switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~
Protection class to DIN 40050	IP 65
Order example	V02 2 VZ.0

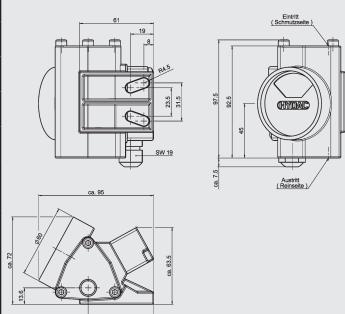


### 3.4 MOBILE INDICATORS

#### 3.4.1 RETURN LINE


##### VMF x CM.x


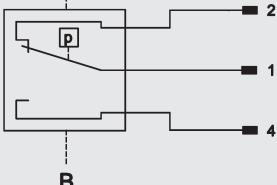
	Type of indication	electrical switch
	Weight	90 g
A	Pressure setting or indication range	2 bar $\pm 0.3$ bar
B	Permitt. operating pressure	10 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	24V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	Ohmic 6 A at 24 V = Ohmic 0.03 to 6 A at max. 230 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 CM.1/-4M0

##### VMF x FD.x (plug connection: Deutsch DT 04-2P)

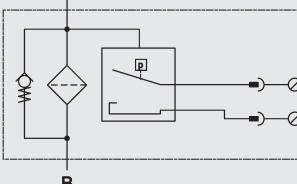
	Type of indication	electrical switch
	Weight	70 g
A	Pressure setting or indication range	2 bar $\pm 0.3$ bar
B	Permitt. operating pressure	11 bar continuous
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/O or N/C
	Max. switching voltage	42 V
	Electrical connection	Deutsch DT 04-2P
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VMF 2 FD.0 /-2M0

##### VR x FD.x (plug connection: Deutsch DT 04-2P)

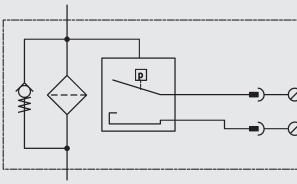	Type of indication	electrical switch
	Weight	90 g
A	Pressure setting or indication range	2 bar $\pm 0.3$ bar
B	Permitt. operating pressure	11 bar continuous
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O or N/C
	Max. switching voltage	42 V
	Electrical connection	Deutsch DT 04-2P
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 2.5 A at 24 V = Ohmic 1 A at 220 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VR 2 FD.0 /-2M0

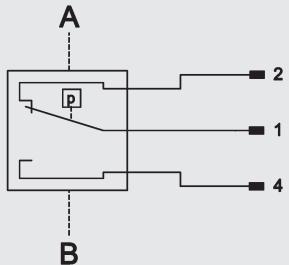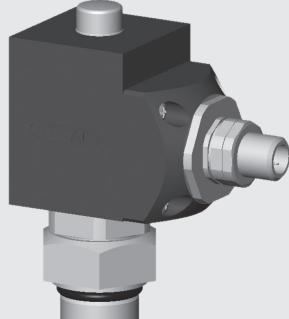

Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting
Weight	140 g
Pressure setting or indication range	2 bar - 0.2 bar
Permitt. operating pressure	7 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	15 Nm
Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
Max. switching voltage	24V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VR 2 LEM.1/-4M0

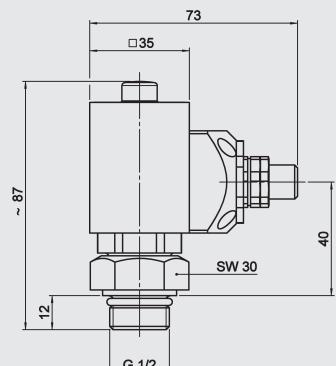


### 3.4.2 DIFFERENTIAL PRESSURE


VL x BF.x




Type of indication	visual
Weight	25 g
Pressure setting or indication range	1 bar -10% 2.5 bar -10%
Permitt. operating pressure	40 bar
Permitt. temperature range	-10 °C to +80 °C
Thread	M3; M4
Max. torque	0.6 Nm
Switching type	-
Max. switching voltage	-
Electrical connection	-
Max. switching voltage at resistive load	-
switching capacity	-
Protection class to DIN 40050	-
Order example	VL 2.5 BF.0

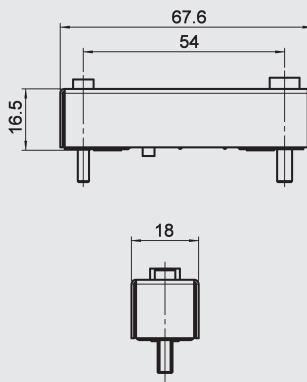



VM x CD.x (plug type: Deutsch DT 04-2P)

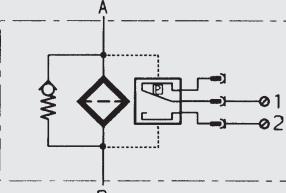
Type of indication	electrical switch
Weight	100 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
Permitt. operating pressure	210 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/O or N/C
Max. switching voltage	48 V
Electrical connection	-
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
Order example	VM 5 CD.0 /-2M0

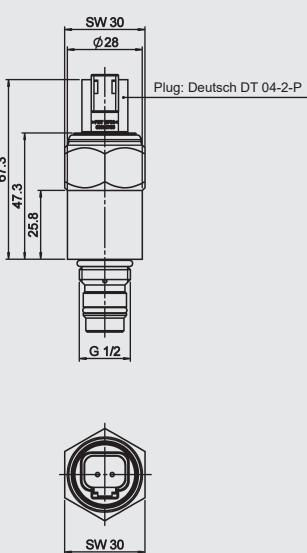




VM x CJ.x (plug type: Junior Power Timer)



Type of indication	electrical switch
Weight	100 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
Permitt. operating pressure	210 bar
Permitt. temperature range	-30 °C to +100 °C
Thread	G 1/2
Max. torque	33 Nm
Switching type	N/O or N/C
Max. switching voltage	48 V
Electrical connection	Junior Power Timer
Max. switching voltage at resistive load	60 W = 100 VA ~
switching capacity	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
Protection class to DIN 40050	IP 54 (only if the connector is wired and fitted correctly)
Order example	VM 5 CJ.0 /-2M0

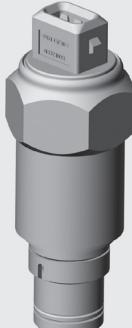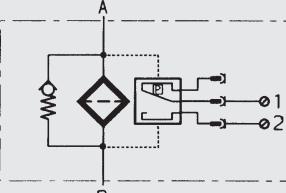


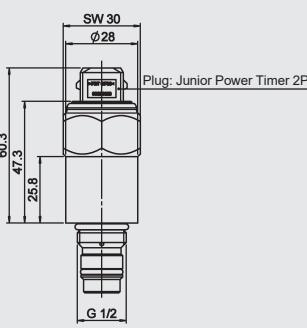

## VD x CJ.x (plug type: Junior Power Timer)

 	Type of indication	electrical switch
	Weight	200 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	N/O or N/C
	Max. switching voltage	48 V
	Electrical connection	Junior Power Timer
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	Ohmic 3 A at 24 V = Ohmic 0.03 to 5 A at max. 230 V ~
	Protection class to DIN 40050	IP 54 (only if the connector is wired and fitted correctly)
	Order example	VD 5 CJ.0 /-2M0

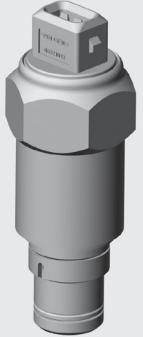
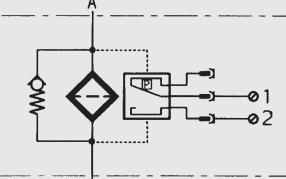
## VM x CM.x

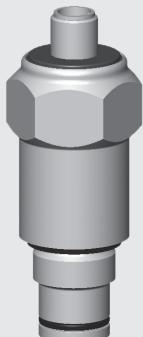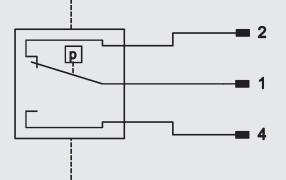 	Type of indication	electrical switch
	Weight	70 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	48 V
	Electrical connection	Male connection M12 x 1
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	ohmic 2.5 A at 24 V = ohmic 2.5 A at 42 V ~
	Protection class to DIN 40050	IP 67 (only if the connector is wired and fitted correctly)
	Order example	VM 2 CM.0/-4M0


## VM x M.x

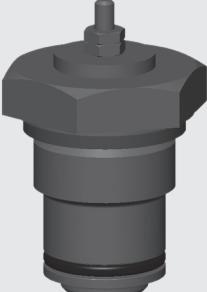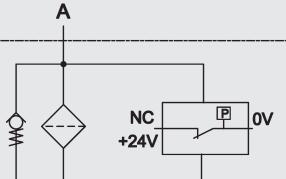 	Type of indication	single pole (ground switching)
	Weight	31 g
	Pressure setting or indication range	2 bar ±15%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/O or N/C
	Max. switching voltage	24V
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	terminals IP00
	Order example	VM 2 M.0

## VD x LEM.x

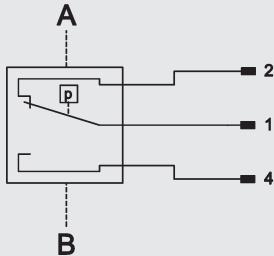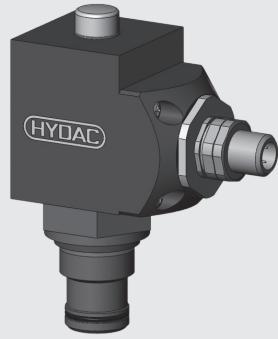


Type of indication	visual, red pin and electrical switch 1 switching contact at 100% of the pressure setting
Weight	350 g
Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar -10%
Permitt. operating pressure	420 bar
Permitt. temperature range	-10 °C to +100 °C
Thread	G 1/2
Max. torque	50 Nm
Switching type	N/C or N/O contacts Reed contacts (change-over contacts)
Max. switching voltage	24V
Electrical connection	Male connection M12 x 1
Max. switching voltage at resistive load	15 W = max. 15 VA ~
switching capacity	Ohmic 1 A at 15 V = Ohmic 1 A at 15 V ~
Protection class to DIN 40050	IP 65
Order example	VD 5 LEM.1/-4M0

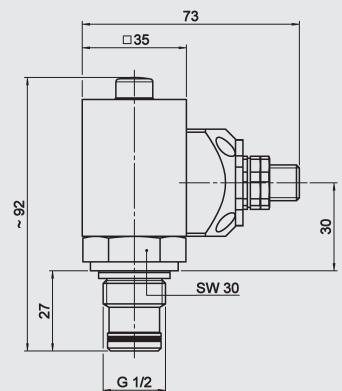


### 3.5 INDICATORS IN ACCORDANCE WITH ATEX DIRECTIVE

#### 3.5.1 RETURN LINE


**VR x B.x (ATEX)** Can be used on aluminium filters up to Zone 1

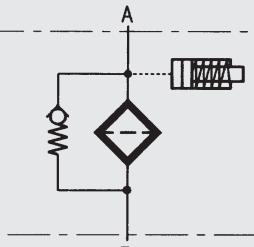 	Type of indication	visual, red pin
	Weight	44 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VR 2 B.0 /-2GC

**VR x B.x (ATEX)** Can be used on steel/cast iron filters up to Zone 1

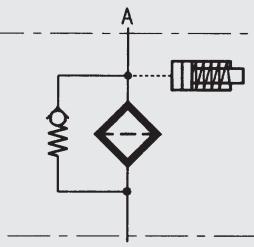 	Type of indication	visual, red pin
	Weight	44 g
	Pressure setting or indication range	2 bar -0.2 bar
	Permitt. operating pressure	7 bar
	Permitt. temperature range	-10 °C to +100 °C
	Thread	G 1/2
	Max. torque	15 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VR 2 B.0 /-2GC-SO174

**VMF x C.x /-Ex2G**

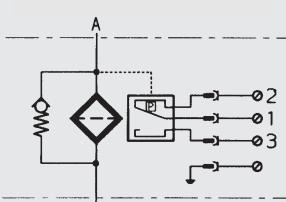 	Type of indication	electrical switch
	Weight	415 g
	Pressure setting or indication range	2 bar $\pm 0.5$ bar
	Permitt. operating pressure	200 bar
	Permitt. temperature range	-20 °C to +70 °C (T6) / -20 °C to +80 °C (T5)
	Thread	G 1/8
	Max. torque	10 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	250 V
	Electrical connection	Cable connection PG 9 Cable length 2 m
	Max. switching voltage at resistive load	62.5 W = 250 VA ~
	switching capacity	Ohmic 0.25 A at 250 V = Ohmic 1 A at 250 V ~
	Protection class to DIN 40050	IP 65
	ATEX designation	Ex II 2G EEx d IIC T6 / T5
	Order example	VMF 2 C.0 /-Ex2G

## VR x C.x /-Ex2G

	Type of indication	electrical switch
	Weight	470 g
	Pressure setting or indication range	2 bar $\pm 0.5$ bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-20 °C to +70 °C (T6)/-20 °C to +80 °C (T5)
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	250 V
	Electrical connection	Cable connection PG 9 Cable length 2 m
	Max. switching voltage at resistive load	62.5 W = 250 VA ~
	switching capacity	Ohmic 0.25 A at 250 V = Ohmic 1 A at 250 V ~
	Protection class to DIN 40050	IP 65
	ATEX designation	II 2 G Ex d IIC T6 / T5
	Order example	VR 2 C.0 /-Ex2G


## VR x C.x (ATEX) Can be used on filters up to Zone 1 \*

	Type of indication	electrical switch
	Weight	340 g
	Pressure setting or indication range	2 bar $\pm 0.3$ bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	*
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	*
	switching capacity	*
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VR 2 C.1 /-2GBC


\* The clogging indicator is simple electrical operating equipment according to DIN EN 60079-14 and may only be used in intrinsically safe circuits (supplied with manufacturer's declaration and operating instructions).

### 3.5.2 DIFFERENTIAL PRESSURE


**VM x B.x (ATEX)** Can be used on aluminium filters up to Zone 1

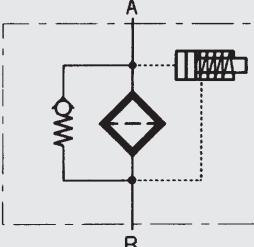 	Type of indication	visual, red/green band Automatic reset
	Weight	110 g
	Pressure setting or indication range	5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VM 5 B.1 /-2GC



**VD x B.x (ATEX)** Can be used on filters up to Zone 1

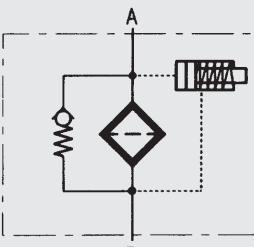 	Type of indication	visual, red/green band Automatic reset
	Weight	110 g
	Pressure setting or indication range	5 bar -10% 8 bar ±10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	-
	Max. switching voltage	-
	Electrical connection	-
	Max. switching voltage at resistive load	-
	switching capacity	-
	Protection class to DIN 40050	-
	Order example	VD 5 B.1 /-2GC



**VD x C.x /-2GEXDIIC**

 	Type of indication	electrical switch
	Weight	from 600 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-20 °C to +60 °C (setting) (media temperature max. 75 °C)
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	Change-over
	Max. switching voltage	250 V
	Electrical connection	Cable connection
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	ohmic 3 A at 24 V = ohmic 0.03 A to 5 A at 250 V ~
	Protection class to DIN 40050	IP 66
	ATEX designation	Ex II 2 G Ex d IIC T6
	Order example	VD 2 C.1 /-2GEXDIIC

### VM x C.x (ATEX) Can be used on aluminium filters up to Zone 1 \*

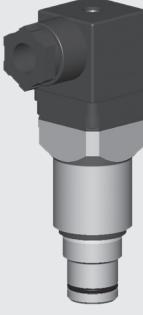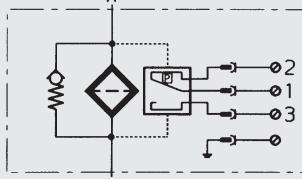 	Type of indication	electrical switch
	Weight	120 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	*
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	*
	switching capacity	*
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VM 5 C.0 /-2GBC-SO135

### VD x C.x (ATEX) Can be used on filters up to Zone 1 \*

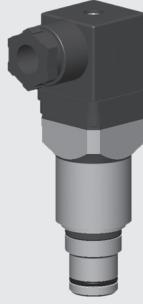
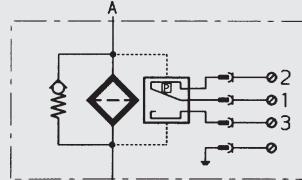
 	Type of indication	electrical switch
	Weight	120 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	*
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	*
	switching capacity	*
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 C.0 /-2GBC-SO135

\* The clogging indicator is simple electrical operating equipment according to DIN EN 60079-14 and may only be used in intrinsically safe circuits (supplied with manufacturer's declaration and operating instructions).



### 3.6 INDICATORS WITH UL OR CSA APPROVAL

#### 3.6.1 DIFFERENTIAL PRESSURE

##### VM x C.x (UL, Standard 508)

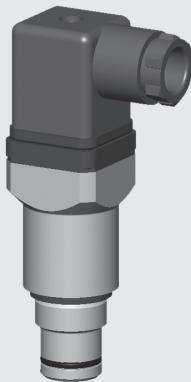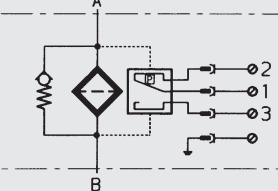
 	Type of indication	electrical switch
	Weight	120 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	210 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	33 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	115 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	ohmic 3 A at 24 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VM 5 C.0 /-CRUUS


##### VD x C.x (UL, Standard 508)

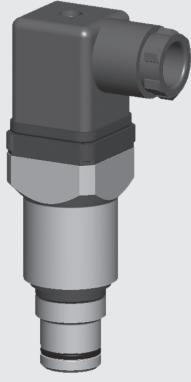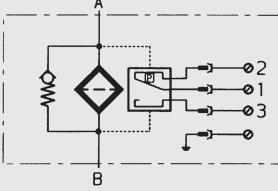 	Type of indication	electrical switch
	Weight	120 g
	Pressure setting or indication range	2 bar -10% 5 bar -10% 8 bar ±10%
	Permitt. operating pressure	420 bar
	Permitt. temperature range	-30 °C to +100 °C
	Thread	G 1/2
	Max. torque	100 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	115 V
	Electrical connection	Male connection M20 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	60 W = 100 VA ~
	switching capacity	ohmic 3 A at 24 V =
	Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)
	Order example	VD 5 C.0 /-CRUUS

### 3.6.2 RETURN LINE

#### VR x C.x (CSA)

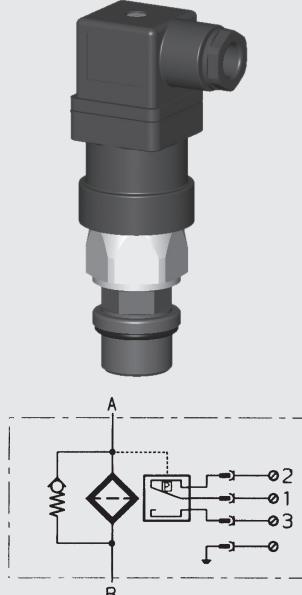	Type of indication	electrical switch
	Weight	340 g
	Pressure setting or indication range	2 bar -0.3 bar
	Permitt. operating pressure	40 bar
	Permitt. temperature range	-5 °C to +120 °C
	Thread	G 1/2
	Max. torque	30 Nm
	Switching type	N/C or N/O (change-over contacts)
	Max. switching voltage	230 V
	Electrical connection	Male connection PG 9 Female connector to DIN EN 175301-803
	Max. switching voltage at resistive load	250 W = 300 VA ~
	switching capacity	ohmic 4 A at 24 V ohmic 0.3 to 4 A at max. 230 V ~
Protection class to DIN 40050	IP 65 (only if the connector is wired and fitted correctly)	
	Order example	VR 2 C.0 /-CSA

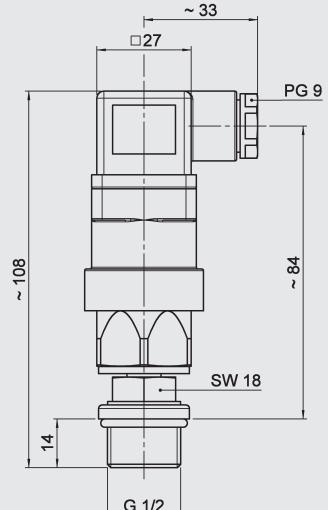

## 4. MODEL CODE

VR 2 D . X /-V-L24

### 4.1 STANDARD CLOGGING INDICATORS

#### Type

VMF return line indicator; connection G 1/8  
VR return line indicator; connection G 1/2  
VRD return line indicator; for differential pressure cavity  
VM differential pressure indicator; up to 210 bar operating pressure  
VD differential pressure indicator; up to 420 bar operating pressure  
VL differential pressure indicator; up to 25 bar operating pressure  
V02 differential pressure indicator; piped separately; up to 100 bar operating pressure

#### Pressure setting

see particular clogging indicator

#### Version

B visual with automatic reset (for vertical installation only!)  
BF visual, mobile  
BM visual with manual reset  
C electrical  
CA electrical with AMP connector (Mark II)  
CD electrical with Deutsch connector (DT 04-2P)  
CJ electrical with AMP Junior Power Timer connector  
CM electrical with M12x1 connector  
CS electrical with AMP Superseal connector  
D visual/electrical  
E pressure gauge, horizontal  
ES pressure gauge, vertical  
F pressure switch  
FD pressure switch with Deutsch connector (DT 04-2P)  
FJ pressure switch with AMP Junior Power Timer connector  
FS pressure switch with AMP Superseal connector  
GC electronic  
GW electronic  
K pressure gauge, horizontal  
LE visual/mechanical with 100% switching contact  
LEM visual/mechanical with 100% switching contact and M12x1 connector  
LZ visual/mechanical with 75% and 100% switching contact  
M electrical, earth-switching  
R pressure gauge, horizontal  
RS pressure gauge, vertical  
UBM visual, negative pressure  
UE negative pressure gauge, horizontal  
UF negative pressure switch  
V visual/analogue  
VE visual/analogue with 100% switching contact  
VZ visual/analogue with 75% and 100% switching contact

#### Modification number

X the latest version is always supplied

#### Supplementary details

30C cold start suppression of switch outputs up to 30 °C ±5 °C  
(only for C-, D-, LZ indicators; power supply only with direct current – max. 24 volts;  
C and D indicators only for VD and VM; D and LZ indicators only as N/O contact)  
L... lamp with appropriate voltage (24, 48, 110, 230 volts) ] only for  
LED 2 light-emitting diodes up to 24 volts ] version "D"  
OE N/C function  
SO135 indicator suitable for PLC control via gold crosspoint contacts  
W suitable for oil/water emulsions (HFA, HFC)  
V seal made from Viton (FKM), suitable for phosphate ester fluid (HFD-R) and biodegradable oils  
**(must be specified for version "GW")**  
Addition: For VMF indicators B, LE, LZ and C-/EX2G a "-V" must be added for a Viton version.  
For all other VMF versions, the standard is V and is not specified.

#### Supplementary details for "GC" type

113 N/O function	pressure peak suppression up to 10 sec. cold start suppression of switching outputs (PNP technique, positive switching) up to 25 °C	] Must be specified! Others on request
123 N/C function	pressure peak suppression up to 10 sec. cold start suppression of switching outputs (PNP technique positive switching) up to 25 °C	
30C	cold start suppression of switching outputs up to 30 °C (other temperatures on request)	
LED	3 LEDs (green, yellow, red) in terminal box	
PF	floating switching outputs (due to relay in the plug)	
SP	analogue signal: voltage output 1-10 V	] if SP or SQ are not specified "current sink" model supplied
SQ	analogue signal: voltage output 4 to 20 mA (current source)	

#### Supplementary details to "GW" type

113 N/O function	pressure peak suppression up to 10 sec. cold start suppression of switching outputs (PNP technique positive switching) up to 25 °C	] Must be specified! Others on request
123 N/C function	pressure peak suppression up to 10 sec. cold start suppression of switching outputs (PNP technique positive switching) up to 25 °C	

#### **Supplementary details for "LZ" type**

AV plug and connector to AUDI, VW specification  
BO plug and connector to BMW, Opel, Ford specification  
BO-LEDAs for BO, but with progressive LED strip  
CN electrical connection, 1 connector DIN 43651 with 3 LEDs (to CNOMO specification NF E 48-700)  
DB electrical connection, 1 connector to DIN 43651 with 3 LEDs (to Daimler-Benz and BMW specification)  
D4C plug and connector to Daimler-Chrysler specification with cold start suppression 30 °C

#### **Supplementary details to "ATEX" type**

2GC for visual indicator type "B" with ATEX certificate  
2GBC for electrical indicator type "C" with ATEX certificate (the switch used in the indicator is a passive component according to EN 50020 and can therefore be used in intrinsically safe circuits as simple apparatus in accordance with EN 60079-14)  
2GEXDIIC for electrical indicator suitable for use in Zone 1 (Category 2), gas atmosphere, Category d (Flameproof Enclosure), Explosive subdivision IIC to ATEX directive  
EX2G Ex-protection type for the return line indicator type "C"


#### **Supplementary details for "UL" and "CSA" approval**



CRUUS for electrical differential indicator type "C"  
with UL approval  
CSA for electrical return line indicator type "C" with CSA approval

## 5. ADAPTERS

### 5.1 TYPES

	Designation	ADAPTER VD-D-S.0	
	Part no.	00318736	
	Description	Extending adapter for differential pressure cavity to HYDAC works standard HN 28-22	
	Designation	ADAPTER VD-D+D-S+S.0	
	Part no.	00318732	
	Description	Y-adapter to convert 1 differential pressure cavity into 2 differential pressure cavities according to HYDAC works standard HN 28-22. Swivel-type on request!	
	Designation	ADAPTER VR-R+R-S+S.0	
	Part no.	00318741	
	Description	Y-adapter to convert 1 return line cavity into 2 return line cavities (G ½ ) Swivel-type on request!	
	Designation	ADAPTER V 1/4 I-D-S.0	
	Part no.	00318730	
	Description	Connection adapter for piping clogging indicators separately with differential pressure cavity according to HYDAC works standard HN 28-22. Two connections G ¼ (one before and one after the filter element)	

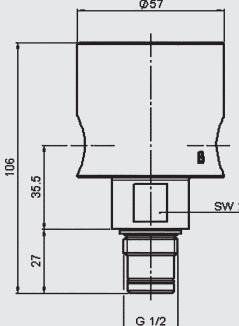	<table border="1"> <tr> <td>Designation</td><td>ADAPTER VD-D+1/4+1/4-S+W+W.0</td></tr> <tr> <td>Part no.</td><td>00318744</td></tr> <tr> <td>Description</td><td>Extending adapter for differential pressure cavity according to HYDAC works standard HN 28-22. Also two connections, one before and one after the filter element.</td></tr> </table>	Designation	ADAPTER VD-D+1/4+1/4-S+W+W.0	Part no.	00318744	Description	Extending adapter for differential pressure cavity according to HYDAC works standard HN 28-22. Also two connections, one before and one after the filter element.	
Designation	ADAPTER VD-D+1/4+1/4-S+W+W.0							
Part no.	00318744							
Description	Extending adapter for differential pressure cavity according to HYDAC works standard HN 28-22. Also two connections, one before and one after the filter element.							

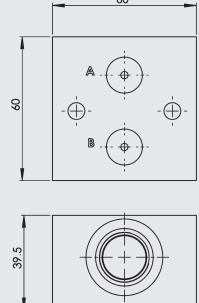	<table border="1"> <tr> <td>Designation</td><td>ADAPTER VF-D-S.0 /-RT</td></tr> <tr> <td>Part no.</td><td>On request</td></tr> <tr> <td>Description</td><td>only for the following filters: LFR, LPFR, MDFR, RFLR, RKMR, RMER, RMTR, RPER</td></tr> </table>	Designation	ADAPTER VF-D-S.0 /-RT	Part no.	On request	Description	only for the following filters: LFR, LPFR, MDFR, RFLR, RKMR, RMER, RMTR, RPER	
Designation	ADAPTER VF-D-S.0 /-RT							
Part no.	On request							
Description	only for the following filters: LFR, LPFR, MDFR, RFLR, RKMR, RMER, RMTR, RPER							

## 5.2 MODEL CODE (= EXAMPLE)

### ADAPTER VD-D+1/4+1/4-S+W+W.X /-ESB

#### Connection

VD differential pressure indicator; connection G 1/2  
 VR return line indicator; connection G 1/2  
 V1/4I differential pressure indicator; connection G 1/4 internal  
 VF differential pressure indicator; flange type

port 1	port 2	port 3
port 1	port 2	port 3

#### Ports (several ports are possible!)

D differential pressure cavity G 1/2  
 R return line cavity G 1/2  
 MF cavity for pressure gauge and pressure switch  
 1/4 cavity G 1/4 for Minimess test points (M16 x 1.5)  
 1/8 cavity G 1/8 for Minimess test points (plug-in connection)

#### Orientation of the ports

S vertical  
 W horizontal

#### Type code

X the latest version is always supplied


#### Supplementary details

ESB swivel type


V seal in Viton (FPM), suitable for phosphate ester (HFD-R) and biodegradable oils

## 5.3 OTHER EXAMPLES


### VD-D-S.0

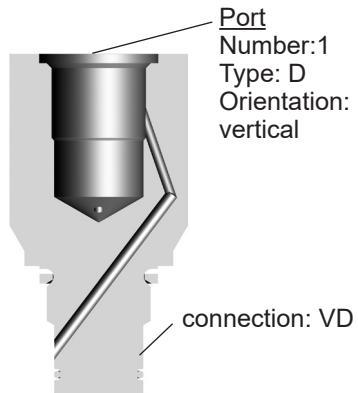

### VR-R+R-S+S.0

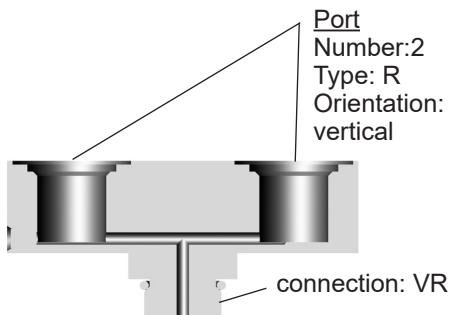

### VD-D+1/4+1/4-S+W+W.0

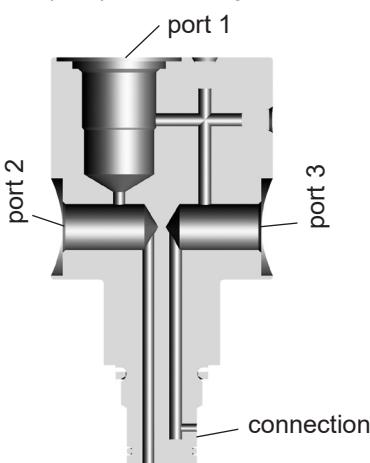


## 6. DESINA SPECIFICATION

DESINA is a fully comprehensive system intended to bring standardization and decentralization to the field of fluid technology and to electrical installation of machinery and systems. The system engineering, automotive and supply industries have worked together to draw up specifications of the necessary components. DESINA makes use of tried-and-tested solutions, such as open bus systems, standard industrial plugs etc.

By standardizing components, interfaces and connection systems, such as a hybrid field bus cable (Cu/LWL), a wide range of different field bus systems can be made compatible on a single physical base.

### 6.1. TOTAL CONCEPT FOR MACHINE TOOL INSTALLATION

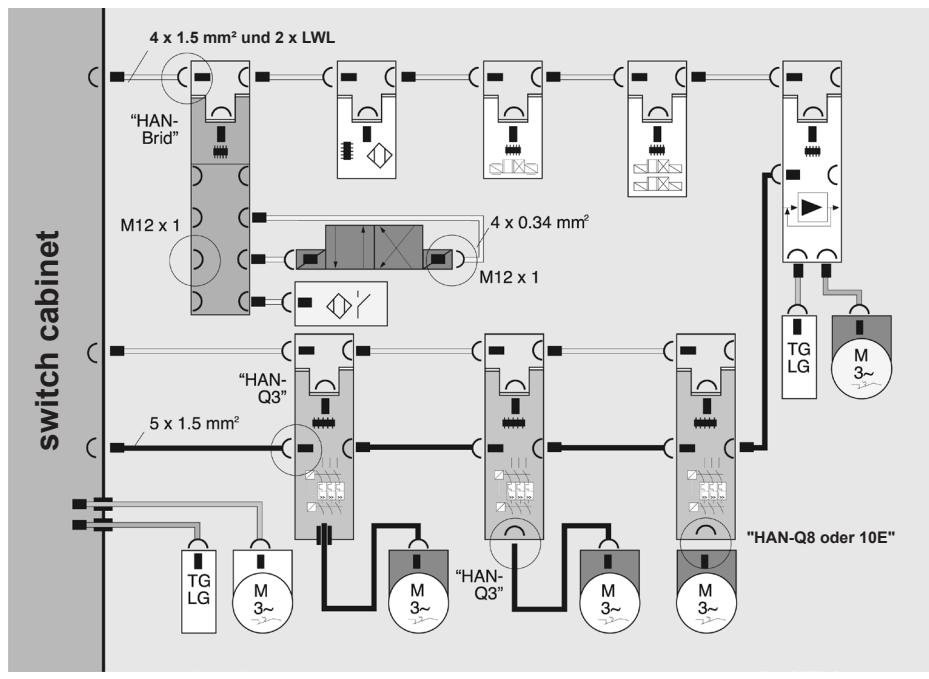

## 6.2. CLOGGING INDICATORS

The following clogging indicators are approved to DESINA specification:

- VD 5 LZ.x /-D4C
- VR 2.5 LZ.x /-D4C
- VD 5 LZ.x /-BO
- VR 2.5 LZ.x /-BO
- VD 5 LZ.x /-AV
- VR 2.5 LZ.x /-AV
- VR 2.5 LZ.x /-GM

all with M 12 x 1 connector!



The DESINA logo is shown on the type code label of approved clogging indicators.



## **NOTE**

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

**HYDAC Filtertechnik GmbH**  
Industriegebiet  
**66280 Sulzbach/Saar, Germany**  
Tel.: +49 68 97 / 509-01  
Fax: +49 68 97 / 509-300  
Internet: [www.hydac.com](http://www.hydac.com)  
E-Mail: [filter@hydac.com](mailto:filter@hydac.com)