

Always. Reliable. Tight.


## Double wall insert adjustable length, for setting in concrete

# HSI 150- K2-Varia/200-260

Article no.: 2140307199



- **Stepless adjustment to the required wall thickness on site**
- **In total, three spray applications of 3-ribbed seal are applied to create a pressure-tight seal with the concrete**
- **Quality mark on both sides: sealed ex works. Option to check for accidental or unauthorised opening of the closing cover**

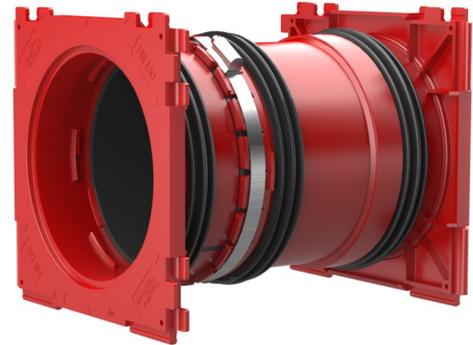

For the gastight and watertight connection on both sides of system seals for cables and cable ducts and maximum flexibility for subsequent use.

## FACTS

### Application range:

- Waterproof concrete stress class 1, Waterproof concrete stress class 2

### Advantages:

- System seal can be connected on both sides (e.g. cable duct connection and cable seal)
- Packages can be created with frame connection system on site
- Can be used in all types of wall including element constructions

## Scope of delivery:

- 2 pressure-tight closing covers
- Hex key with integrated torque limitation

## Dimensions:

- Frame dimensions: 220x 220 mm
- Centre distance: 210 mm
- Minimum wall thickness: 200 mm

## Material:

- Wall insert: ABS with TPE 3-ribbed seal
- Adapter pipe: PVC
- Clamping strap: W1
- Closing cover: ABS with TPE seal

## Tightness:

- Gastight and watertight to 2.5 bar

# FEATURES

Wall thickness (mm): 200 - 260

# PICTURES

