# **Motors**

# saia





The data used in this Product Overview may be used as a guideline only. Specific operational characteristics of our products may vary according to individual applications. It is strongly recommended that specific operating conditions are clarified with Johnson Electric before application. Johnson Electric Terms and Conditions of Sale apply.

All data may be subject to change without notice.

# **Table of Contents**

#### Content

Overview	2
How we are organized	3
Looking for a specialized motor solution?	4
Saia - a leading global motor brand	5
Motors for Pharmaceutical and Medical Equipment	6
Motors as Locking Mechanism	7
Motors in the Appliance Industry	8
Table of typical applications & Saia Motor Series	9
Saia Motors Important notes	10
Synchronous Motors	15
Stepper Motors	16
Gearboxes	17
Gearboxes with DC and BLDC Motors	18
Synchronous Motors	19
Electronics for Stepper Motors	20
Synchronous Motors Rotational	21
UAT3	22
UCM	25
UCR	28
UBR1	31
UBR2	33
UDR	35
UDS	37
UFM	39
UFU	41
UFR	43
UPU	47
Stepper Motors Rotational	51
UAG3/4	52
UCD	56
UCB	60
UBD	64
UBB	67
UDB	70
UFD	73
UFB	76
UPJ	81

Gearboxes for Motors	84
UGY	85
UGD	87
UGM	90
UGB	93
UGF	96
UGV	99
UGO/UGP	101
AP 60	105
UGJ	106
UGR	109
UGW	112
Gearboxes with DC & BLDC Motors	114
UGM-DC	115
UGB-DC	117
UGF-DC	119
UGO-DC	121
UGP-DC	123
Synchronous Motors Linear	125
UCC	126
UCK	130
Stepper Motors Linear	134
UAL	135
UCE	139
UCL	144
Connection Types UC motors	149
Electronics for Stepper Motors	150
Samotronic101	151
Samotronic102	152
Evaluation-Kit 2	153

# The Johnson Electric Group is one of the world's largest providers of motion subsystems and motion components for automotive, medical and industrial applications.

Over the years, we have shipped billions of motors to more than thirty countries in over one hundred different applications. Johnson Electric has an annual production capacity of one billion motors and motion subsystems.

At the heart of Johnson Electric's success is our commitment to make our customers successful. Our customers include many of the world's leading industrial, consumer and automotive companies. We begin by understanding our customers' business needs, and the product application requirements of the end user of our customers' products. Then we design and deliver innovative motion solutions that help our customers to differentiate their products in the marketplace. Our goal is to be instrumental in the successful launch of our customers' products in their respective marketplaces.

# Our Brand Promise Johnson Electric delivers competitive advantage

Johnson Electric delivers differentiation and innovation through its motion products – subsystems comprising of Stepper Motors, DC Motors, AC Motors, Piezo-electric Motors, Switches, Solenoids, Flexi Circuits, Motion Control, Precision Plastics and Precision Gears.

# Johnson Electric is the most reliable partner

Johnson Electric is responsive and flexible; and has the financial stability and organizational integrity to meet all of our commitments and to support our customers' success. Product reliability and assurance of supply are our commitment.


# Johnson Electric is "The Safe Choice"

- Financial strength and long standing supplier relationships.
- Unmatched assurance of supply.
- Rigorous supply chain management and complete integrity in compliance with standards.
- Unsurpassed on-time delivery.
- Global logistics support 24/7.
- Collaborative design and project management process.
- Product life cycle support from creation to end-of-life.

Our business growth hinges with leading «branded» goods producers to deliver differentiation and innovation through our motion products. The core platform for delivering these solutions is a highly developed production base and focused customer support teams throughout the world. This combines scale advantages in production and procurement with skilled and dedicated motion application experts.



### How we are organized

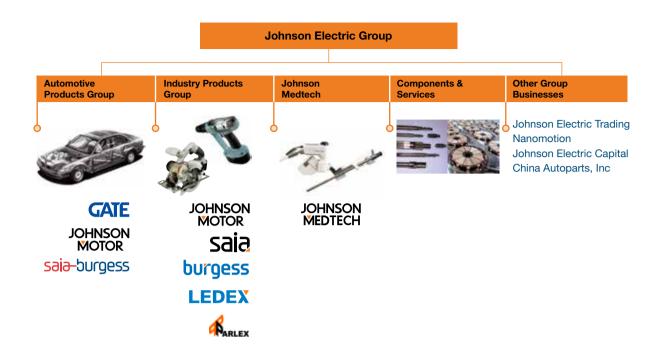

The Group's motion systems, motors and switches businesses are managed through three operating divisions: Automotive Products Group, Industry Products Group and Johnson Medtech.

The Automotive Products Group (APG) is focused on providing customized motion solutions for all major automotive applications. APG goes to market under three product brands: Saia-Burgess for custom actuators; GATE for engine cooling fan modules; and Johnson Motor for DC motors and brushless DC motors.

The Industry Products Group (IPG) provides motion products and solutions for various commercial and industrial application sectors, including home appliances, power tools, business equipment, personal care products, medical equipment, building automation, security, audio-visual and other industrial products. IPG goes to market under several product brands: Johnson Motor for DC motors, AC motors and BLDC motors; Saia Motor for stepper motors and synchronous motors; Ledex for solenoids; and Saia, Burgess, brands for switches.

Johnson Medtech is an ISO13485 certified designer and manufacturer of motion related products for the medical device industry. The focus of Johnson Medtech is primarily in subsystem for medication delivery systems, surgical robotics and image guided surgery.

Supporting these three business units is the Components & Services division which produces metal and plastic parts, tooling and production equipment for the Group. Johnson Electric is a highly vertically integrated business that manufactures an exceptionally wide range of components that form the basis for its final products. We make magnets, bearings, shafts, housings, laminations, commutators and die cast parts. We also build tools, assembly fixtures, plastic molds as well as armature winding and other production machines.

Supporting our customers worldwide are sixteen R&D centres located in Hong Kong (China), Shenzhen (China), Shanghai (China), Nagano (Japan), Yokneam (Israel), Asti (Italy), Murten (Switzerland), Halver (Germany), Dresden (Germany), Isle of Wright (Parlex), San Jose (USA), Methuen (USA), Vandalia (USA), Springfield (USA) and Plymouth (USA).

The Group also includes a number of complementary subsidiary companies. These include an innovative provider of flexible printed circuits and interconnect solutions; a successful niche player in the programmable controls industry; and a rapidly growing China auto parts business.

# Looking for a specialized motor solution?

#### Look no further.

We offer the industry's most comprehensive combination of technology, engineering and manufacturing to satisfy all your actuation design needs. From stand-alone motor products to complete value-added solutions; we can do it all for you. The images shown are just a few samples that demonstrate our design and value-added assembly capabilities.

If your application requires more than a standard product solution, please consider us early in your design process. Our application engineering staff will be happy to discuss your requirements.













# Saia - a leading global motor brand

We offer the best design resources for actuating solutions – whether it's one motor delivered tomorrow morning or a half million delivered just-in-time over the next year.

Machine and process automation can range the most basic on-off function to extremely complex sequencing. When the process involves linear or rotary motion, motors are among the best actuation devices in terms of size, cost, simplified installation, and ease of use. On this page are some of the primary functions which are ideally suited for Saia motors, followed by several pages of current application examples of our products applied in a wide variety of industries. If your design includes linear or rotary operations, we can help you determine the best product to meet your application design requirements.

#### **Variable Positioning**

Stepper motor for linear applications and rotary applications provide variable positioning capabilities.

# **Uncompromising Reliability**


Saia motors provide repeatable, predictable performance.

# **Common Rotary Motor Applications**

- Counters
- Circuit breakers
- Rotary valves
- Rotating lamps
- Textile machinery
- Flaps
- Level indicators
- Ticket machines
- Copiers

#### Common Linear Motor Applications

- Coffee machines
- Textile machinery
- Linear valves
- Vending machines




Gate diverters, depending on the application, can be used continuously or very infrequently. In this example, a stepper motor unit is chosen for its actuation life rating.

#### **Pinch**

In this example, a linear motor is utilized for its variable positioning capability to smoothly pinch the tube to the operator's precise demand.





**Position** 

Positioning applications can range from a simple ratcheting device, such as this, to precise variable positioning using linear or rotary motor.

# Motors for Pharmaceutical and Medical Equipment

Saia motors are ideally designed for precise, clean, quiet, reliable automation of a variety of medical equipment functions.

Inherent features which optimize linear and rotary motor use in the medical industry include:

- Easy control with simple electronics
- Instant actuation or smooth variable positioning
- High MTBF, reliable, repeatable operation without degradation due to wear
- Long, predictable life
- Ideal for both open loop or closed loop microprocessor controlled systems

# Pharmaceutical Dispenser

- Locks storage trays closed
- Locks individual medicine compartments
- Counts tablets as dispensed

#### **IV Fluid Metering**

- Acting as pinch valves, motor offer a simple, direct, reliable means to start and stop fluid flow through valves or tubing
- Principle motor design advantages include non-contacting, quiet operation with minimal heat generation
- Also, depending on the design requirements of the application, either immediate on/off or slow, proportional actuation can be achieved

# Intraocular Microsurgery

- Motors are used to control fluid flow through a series of tubes during intraocular surgery
- Reliability is a primary motor advantage because a malfunction during surgery could be detrimental

#### Surgical Laser

 Motors are commonly used as the shutter mechanism for surgical lasers.

# Portable, Real-Time Blood Analyzer

A bedside blood analyzer allows blood to be monitored during administration of medicines allowing doctors to prescribe medications in more exacting dosages based on the patient's condition

# **Motors as Locking Mechanism**

Motors are found in numerous applications that require a locking device. Whether it is a medical application, an office automation application or a door lock, motors provide an effective, cost-efficient locking mechanism.

#### Security Applications

- Hotel room door lock
- Hotel safe lock
- Prison door lock
- Fire safety door opening lock

#### **Office Automation**

- Disk drive door lock
- Personal computer chassis lock
- Docking station lock
- Locks to hold peripherals in place
- Tape library index lock

#### Medical

- Sterilizer lock
- Centrifuge lock
- Blood analysis machine lock

#### Consumer

- Oven door lock for selfcleaning function
- Garage door safety lock
- Home safe lock

#### Industrial

- Overhead door lock
- Fire safety door lock
- Prison locks
- Commercial laundry locks





# Motors in the Appliance Industry

Motors are found in numerous applications in the appliance industry. AC and DC products are available for on/ off operation on many types of consumer and commercial appliances.

#### Domestic Appliances

- Through the door refrigerator ice and water dispensers
- Door locks on selfcleaning ovens
- Gas valve control on gas ranges and ovens
- Drain control valves on domestic washing machines
- Brake motors on domestic washing machines





# Commercial Appliances

- Dispensing valves
- Beverage dispensing valves
- Product dispensers on vending machines
- Coin changers on vending machines
- Actuating devices on commercial baking and food processing or packaging equipment
- Wrapping material cutters for food packaging
- Gas valve control on gas fired boilers and furnaces
- Industrial overhead door brake mechanisms

# Table of typical applications & Saia Motor Series

In addition to the products shown in the Product Catalog pages, the Product Mapping table below shows a wide range of motor types for a selection of applications. Also, motors may be customized to fulfill your specific requirements, please feel free to contact us.

Application & Motor types	UAT3	UCM/UCR	UBR1/UBR2	UDR	NDS	UFM/UFU/UFR	UPU	UAG3/4	UCD/UCB	UBD/UBB	UDB	UFD/UFB	UPJ	UGY	UGD	UGM	UGB/UGF	UGV	UGO/UGP	UGJ	UGR	UGW	UCC/UCK	UAL	UCE/UCL
HVAC/Diverter valves	•	•	•		•			•	•	•													•		•
HVAC/Thermostatic valves	•					•																			
Coffee machines	•							•	•					•				•					•	•	•
HVAC / Air Flaps	•	•																•					•	•	•
Vending/Gaming	•	•	•	•	•	•		•		•		•		•									•		•
Industrial Equipment	•	•	•	•	•	•	•	•	•	•	•	•	•		•		•	•	•		•		•	•	•
ATM																									
Medical			•	•	•	•	•			•	•	•			•		•	•		•			•	•	•
Commercial Equipment	•	•	•	•	•	•	•	•	•	•	•	•	•		•			•						•	
Pellet stoves						•						•													
Level indication					•																				
Textile machines									•									•						•	•
Credit card readers								•																	
Pan and tilt cameras																									
Chart recorders								•																	
Tachograph								•																	
Conveying						•	•					•													
Mechanical handling																		•						•	
Copier & Printer					•	•				•	•	•		•											
Distribution		•	•		•	•	•		•	•	•	•	•		•	•	•	•	•	•	•			•	
Home Appliances			•	•	•	•		•	•					•	•		•	•						•	•
Industrial automation		•																•						•	
Specialist vehicles					•					•	•	•													
Waterheaters/Showers			•		•						•	•													
Circuit Breaker			•			•				•		•							•		•				
HVAC	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•			•	•	•
Page	22	25/28	31/33	35	37	39/41/43	47	52	26/60	64/67	70	73/76	81	85	87	06	93/96	66	101	106	109	112	124/128	133	137/142

### Saia Motors Important Notes

#### General

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Saia motors fulfill basis insulation requirements of EN 60335-1: 2012.

Application advice

The requirements for protection class I, II or III according to EN 60335-1 have to be fulfilled by customer application.

#### Stepper motors

Specified data for torque values is valid for

- a duty cycle of 100%, in Performance Charts additionally for 30% (cycle time: 5 min.)
- an ambient temperature of 23 ± 5°C
- a defined driver circuitry, with constant voltage supply
- at rated voltage

Depending from operational conditions, max. load torque must be lower than specified torque in catalogue. Please send us an enquiry.

If duty cycle or actual maximum ambient temperature is lower, the motor can be designed for higher performance (torque and power) by using a different winding.

Chopper driver circuits can be applied alternatively to a driver with constant voltage supply. They are more expensive, but bring higher performance. Additionally, they reduce the effects of temperature and supply voltage change.

Performance charts available on request.

Step angle tolerance is about  $\pm 5\%$  (not cumulative)

#### **Synchronous motors**

Specified data for torque/power values are valid for

- a duty cycle of 100%
- an ambient temperature of 23 ±5°C
- at rated voltage
- synchronous torque (pull-out torque, not starting torque)

Torque is specified with maximum values, overloading is not permissible.

Depending from operational conditions, max. load torque must be lower than specified torque in

catalogue. Please send us an enquiry.

If duty cycle or actual maximum ambient temperature is lower, the motor can be designed with higher performance by using a different winding.

The basic design is the same as for our stepper motors, but the motors are operated by a sinus waveform voltage.

A capacitor, connected to one of the motor coils, is necessary for rotation in the appropriate direction.

Motor type UDS is a special design: It has only one coil, but is fitted with an internal backstop. This backstop forces the motor to rotate only in one direction.

Motor can be designed to rotate in CW or in CCW direction. A capacitor is not necessary.

# Mechanical and electrical connections

On request we can deliver other options, e. g.

- special motor shafts
- pinions on shaft
- special cable lengths
- connectors

#### Gearboxes


Saia gearboxes are available in a variety of sizes to meet a wide range of torque requirements. Ratios from 4 1/6 to 6.048.000 are available. The basic design is a spur gearbox with gear wheels in metal, plastics and combinations of the two materials. A particular feature is the availability of freewheels and slipping clutches.

The gearboxes are turned by the motor, energy flow is from input to output shaft. That means, they are not allowed to be driven by the output shaft (for instance turning manually). This can lead to damage of some internal components!

#### **Direction of rotation**

As a function of the number of stages, the direction of rotation can be either clockwise or counter clockwise. The direction of rotation of motor gearbox units is generally specified by the gearbox output shaft (drive-side, see DIN EN60034-7, IEC 60050-411).





clockwise

counter clockwise

#### **Ratio**


Gear ratio i is the ratio of input speed  $n_{\text{e}}$  and output speed  $n_{\text{a}}$ .

$$i = \frac{n_e}{n_e}$$

# Permissible force FA and FR at the output shaft

Permissible force loads at the output shaft are:

- Axial load (or thrust) FA, pulling or pushing in axial direction of the shaft
- Radial load FR acting laterally on the shaft.
   The catalogue value is referred to a distance of 1 cm to the bearing



#### **Permissible Torque**

The lifetime of a gearbox is determined by the load on the gear teeth and the number of revolutions of the gear wheels.


The maximum permissible torque Mn is defined by the load on the final stage of the gearbox and the stability of the housing.

Some gearboxes have lifetime graphs. It shows the relationship between ratio i and the associated torque for a fixed period of time, e.g. 1000 or 10000 hours. A conditional parameter is the input speed (equivalent to motor speed) corresponding to the total number of revolutions of all gear wheels. In the catalogue we show two curves – for a motor having 250/300 rpm and 500/600 rpm.

For example: Max. output torque Mx1 is permissible at a ratio of ix1. With smaller ratios the max. permissible torque has to be reduced, because otherwise the first stages of the gearbox would be overloaded.

Additionally to the lifetime curve the motor torque Mm, multiplied by gear ratio and reduced by the gear efficiency, is shown (resulting in output torque Mi).



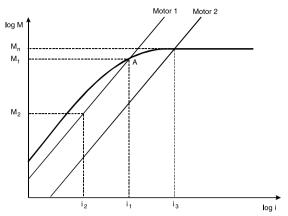

Example1: The application of Motor 1 combined with a gearbox of ratio i1 leads to an output torque M1 at point A. The gearbox can transmit this torque, meeting its lifetime.

If a ratio of i >i1 is selected, actual torque would be M > M1. However lifetime cannot be guaranteed, as the operating point lies above of the lifetime curve now.

Example 2: Motor 1 with a ratio of i2. Torque generated is M2. This is below of the lifetime curve. Lifetime of gearbox is higher.

Example 3: Motor 2 and a ratio of i3 generate a torque of Mn. When using a ratio of i > ix3 - the gearbox cannot be loaded more than Mn.

#### **Efficiency**

The efficiency is determined by the number of gearbox stages.

Efficiency of UGO/UGP and UGR is specified in catalogue

Efficiency of all other gearboxes on request.

#### **Clutches**

Gearbox types UGB and UGD can be fitted with freewheels or slipping clutches. Freewheels transmit the max. torque M in the locked direction, <1 cNm in the opposite direction. One way slipping clutches behave similarly except that the slip torque has a higher value. Two way slipping clutches can only transmit a limited torque value in either direction lower than the slip torque.

Slipping clutches are used to: Protect the gearbox against torque overloads, or to adjust the load by turning from the load side (remember: turning the output shaft directly can otherwise damage the gearbox).







Slipping clutch	One way	One way	Two way
Freewheel	yes	yes	no
Torque, clockwise	full torque	< slipping torque	< slipping torque
Torque Anti clockwise	< slipping torque	full torque	< slipping torque
Output shaft turning, clockwise	slipping possible	blocking	slipping possible
Output shaft turning, anti clockwise	blocking	slipping possible	slipping possible

#### **Explanation of specifications**

#### Power consumption Pin

The power consumption (in W) was determined in no-load operation

#### Load

The total sum of all static and dynamic torques (e.g. friction torque, mass inertia, acting on the rotor).

#### Speed n

rmp revolution per minute

#### **Torque**

The running torque in cNm (also synchronous, braking or dynamic torque) defines the load at which the synchronous motor falls out of synchronism and stops.

#### **Power output**

The power output (in W) is determined according to the following formula

$$P_{out} = \frac{M \times 2 \pi \times n}{60} = [W]$$

M in Nm (1 cNm = 0,01 Nm), n in rpm

#### Pole pair number

The number of rotor pole pairs North/South.

#### **Direction of rotation**

This information always refers to the output shaft, either of the motor or of the gearbox.

Right = clockwise rotation (CW),

Left = counterclockwise rotation (CCW)

#### **Gear torque**

The maximum gear torque in cNm defines the maximum load for a required life of at least 1000 operating hours.

# General technical terms relating to synchronous and torque limited synchronous motors

#### **ED** or Synchronous

The running of the rotor at the same speed as the stator field which is determined by the frequency of the supply.

#### Synchronous speed

Constant speed of rotation at constant frequency based upon the number of pole pairs of the motor

$$n = \frac{f \times 60}{p}$$

f = frequency (Hz), n = speed (rpm) p = number of pole pairs

#### Synchronous torque

Load torque permissible without motor falling out of synchronism, once the synchronous speed has been reached.

#### Starting torque

Load torque the motor is capable to start.

It is influenced by the type and manner of coupling to the load, the load inertia, the gearbox design and the supply voltage. In the case of a very large reduction ratio a small external moment of inertia and nominal gearbox play the starting torque becomes equal to the synchronous torque.

#### **Detent torque (static)**

Defines the maximum torque which can be applied to a deenergised motor without causing the motor to rotate. Catalogue specifications refer to the static detent torque.

#### **Detent torque (dynamic)**

Defines the maximum torque at which the motor comes to an immediate standstill from synchronous running when the power supply is switched off.

#### Permissible load inertia

Is the maximum inertia load the motor can start without external help.

#### Stall-proof

Synchronous motors with permanent magnet rotors can be stalled without damage to the motor winding.

#### **Design characteristics**

The basic design is the same as for our stepper motors, but the motors are operated by a sinus

waveform voltage.

# General technical terms relating to stepper motors

#### **Duty Cycle (ED)**

Duty cycle of operation, based on a cycle time of 5 minutes (1 minute for URG) and a frequency f=0Hz; e.g. ED=30% means that the motor can be continuously powered 1.5 minutes (30% of 5 minutes) without overheating

#### Step angle

Rotary angle through which the motor shaft turns per controlled pulse.

#### **Stepping frequency**

Number of steps of the stepping motor in 1 sec.

#### **Driver**

Electronics which convert step and direction input signals to high power currents and voltages to drive a step motor.

#### **Unipolar driver**

Unipolar means that every coil end has one polarity only. A unipolar coil consists in fact of 2 coils. Alternating the current flows through each of these coils always in the same direction. Compared to a bipolar motor only half of the copper is used at time.

The motor phase winding must be center tapped. On the SAMOTRONIC101 this is already fixed on the board.

Often an additional Z-diode is used to ensure a fast current decay in the switched-off coil. This will give an increased motor torque especially at higher frequencies.

Torque graphs in this catalogue are measured with a 10 V diode.

#### **Bipolar Driver**

Bipolar indicates that every coil end is bipolar, during driving it will be "+" as well as "-". Since every coil is fully used the motor has a higher torque compared to a unipolar one.

Very often a bipolar driver has a constant current drive capability (also called chopper). That will give an increased torque output at higher frequencies and a lower influence of temperature and supply voltage variations. Typical applications use the SAMOTRONIC102.

#### **Rotational speed**

Revolutions of the motor per minute calculated from:

$$n = f \times \frac{\alpha \times 60}{360^{\circ}}$$

 $f = stepping frequency, \alpha = step angle.$ 

#### **Detent torque (static)**

Defines the maximum torque which can be applied to a deenergised motor without causing the motor to rotate. Catalogue specifications refer to the static detent torque.

#### **Holding torque**

Defines the maximum torque with which an energized motor can be loaded without giving rise to a continuous rotary movement.

#### **Pull-in torque**

Operation torque when switching on full step frequency at once, without a ramp.

#### **Pull-out torque**

Operation torque when applying an acceleration / deceleration ramp.

#### **Load inertia moment**

The sum of all the mass inertia moments occurring on the shaft of the stepping motor.

#### Steps/rev

The number of steps per 360° rotation.

#### Maximum operating torque

The maximum torque which a stepper motor without external mass inertia can generate without stepping losses.

## **Synchronous Motors**

#### **Rotational**









Type UAT3

**UCM/UCR** 

UBR1/UBR2

Dimensions (mm)  $\varnothing$  20  $\times$  17

 $\emptyset$  28  $\times$  24

12-230

250/500

300/600

24/12

 $\emptyset$  36  $\times$  21

 $\emptyset$  48  $\times$  24

Characteristics ■ long life

- precision bearingstandard 24VAC motor
- economic volume solution
- standard modules
- customer specific interfaces
- wide range of customized versions available
- up to 230 VAC supply voltage

compact reversible synchronous motor

12-230

250/500

300/600

24/12

Speed 50 Hz (rpm) 600 60 Hz (rpm)

720

Voltage (V) 12-60

Pole number 10

Running torque (cNm) 50 Hz 0.31/0.32 60 Hz

Power output (W)

50 Hz

Page 22

0.19/0.2 60 Hz 0.23/023

0.3/0.3

Gear combination on request

0.76 - 1.70.72 - 1.7

0.30 - 0.630.36-0.66

D, M, B, F

25/28

0.64 - 0.770.61 - 0.77

0.20 - 0.330.24-0.38

D, M, B, F, V, J 31/33

600 12

500

12-230

1.3 1.2

0.68

35

D, M, B, F, V, J

#### **Rotational**







UFM/UFU/UFR



(SM6443/SM6444)

Dimensions (mm)  $\varnothing$  48  $\times$  18.5

Characteristics • simple to connect, only two wires

no capacitor

uni-directional with anti-return mechanism Ø 52 × 28 (56)

12-230

24/12

2.4-4.5

0.9 - 2.5

250/375/500

300/450/600

three-phase AC operation possible

for high power 2, 3 or 4 coils

most powerful

 $\emptyset$  64  $\times$  43

12-230

375

450

16

11.1-30.4

9.0-25.5

package with UGO/P/R gearboxes

Voltage (V) 6-230

Speed 50 Hz (rpm) 500 60 Hz (rpm) 600

Pole number 12

Running torque (cNm) 50 Hz 0.77

60 Hz 0.68 Power output (W)

50 Hz 0.4 60 Hz 0.43

Gear combination D, M, B, F, V, J

Page 37 39/41/43

2.2-4.0 0.8 - 2.4

D, M, B, F, V, J ( $i \le 2k$ ), O, P O, P, R

47

4.4-11.9 4.2 - 12.0

# **Stepper Motors**







UCD/UCB  $\emptyset$  28  $\times$  24

**UBD/UBB** 

Dimensions (mm)  $\emptyset$  20  $\times$  17

economic volume

standard modules customer specific

wide range of

 $\emptyset$  36  $\times$  21

customized versions available

Step angle(°)

Gear combination

Characteristics

18 Holding torque (cNm) 0.53/0.39 7.5/15

interfaces

7.5/15

Detent torque (cNm) > 0.06

52

Page

1.1 - 2.40.15-0.38 0.85-1.6 0.19-0.31

Winding bipolar/unipolar

bipolar/unipolar

bipolar/unipolar

on request D, M, B, F

D, M, B, F, V

64/67 56/60

#### **Rotational**







**UFD/UFB** 



**UPJ** (ST6443/ST6444)

Dimensions (mm)

 $\emptyset$  48  $\times$  24

 $\emptyset$  52 × 28 (56)

 $\emptyset$  64  $\times$  43

Characteristics • compact reversible 15° stepper motor

two step angle motor

most powerful package with STG/V gearboxes

Step angle(°) 15

Holding torque (cNm) 2.2–2.7

7.5/15 3.7 - 8.8

Detent torque (cNm) 0.30

0.38 - 0.68Winding bipolar/unipolar

Gear combination D, M, B, F, V, J

Saia Motors

bipolar/unipolar D, M, B, F, V, J, O, P bipolar O, P, R

11.25

30-45 2-7

Page 70

73/76

81

#### Gearboxes





**UGM** 

 $51 \times 65.2$ 







Туре	UGD

Dimensions (mm)  $55 \times 62/65.6$ 

- Characteristics established plastic gears
  - wide range of ratiosgears rotate on
- volume metal and plastic spur gears
- hardened steel shafts included in plastic
- **UGB/UGF**
- $58 \times 81$
- robust metal spur gears
- plastic primary gearsdie-cast aluminium
- **UGY**
- Ø 20 x 12,7...27,7
- compact size plastic gears
- Ø 34 x 62,4 ■ robust metal spur

**UGW** 

- gears
- plastic primary gears
- plastic housing

	<ul><li>gears rotate on hardened steel shafts</li><li>optional integrated slipping clutches</li></ul>	housing and metal plate	housing		- plastic flousing
Height	12/13	15	17	12,727,7	62,4
Max. torque (cNm) <sup>1)</sup>	32	100	250/500	30	450
Ratios	D: 4 <sup>1</sup> / <sub>6</sub> 6.048.000	121/24800	B: 41 <sup>2</sup> / <sub>3</sub> 345.600 F: 4 <sup>1</sup> / <sub>6</sub> 5000	4,4370	541
Internal slipping clutch	optional	_	optional (UGB)		
Standard shaft (mm)	Ø 4 × 10	Ø 4 × 10	Ø 8 × 12	Ø 4 × 14,8	Ø 8 × 21,3
Page	87	90	93/96	85	112

<sup>1)</sup> max. value, for higher ratios



Type UGV

(STG60/STG61)

 $\emptyset$  65/68  $\times$  68

UGO/UGP

65 × 107





**UGR** (STG200)

 $70 \times 130$ 

- Dimensions (mm)  $70 \times 70$ 
  - Characteristics solid metal spur gears die-cast aluminium housing
- high performance hardened steel spur gears
- low teeth profile optional interface plates for DC motors
- option additional
- the most extensive gear ratio range
- medium torque two plate gear type with metal spur gears
- high performance
- metal gear type
- robust aluminium twin plate design
- can be used with DC motors

		housing for IP 65		
Height	17	29.8–38.2	28	38
Max. torque (cNm)1)	500	600	1500	2000
Ratios	81/32000	61/43750	4¹/636 Mill. ≥ 2500 with UGD	61/4375
Internal slipping clutch	-	-	-	_
Standard shaft (mm)	Ø 8 × 12	Ø 8 × 22	Ø 12 × 20	Ø 12 × 35
Page	99	101	106	109

<sup>1)</sup> max. value, for higher ratios 2) depends on ratio

# Gearboxes with DC and BLDC Motors











Туре	UGM	UGB	UGF	UGO	UGP
With	DC Motor PC280LG	DC Motor PC280LG	DC Motor HC485G	BLDC Motor E9I	DC Motor HC785G
Characteristics	<ul><li>Plastics and metal spur gear wheels</li><li>Bronze bearings</li></ul>	<ul><li>Plastics and metal spur gear wheels</li><li>Bronze bearings</li></ul>	<ul><li>Metal spur gear wheels</li><li>Bronze bearings</li></ul>	<ul><li>Metal spur gear wheels</li><li>Bronze bearings</li></ul>	<ul><li>Metal spur gear wheels</li><li>Bronze bearings</li></ul>
Voltage	12 Vdc and 24 Vdc	12 Vdc and 24 Vdc	12 Vdc and 24 Vdc	24 Vdc	24 Vdc
Max. torque (cNm) <sup>1)</sup>	60	200	400	600	600
Ratios	120 1500	150 1500	125 1200	18.75 750	18.75 750
Internal slipping clutch	_	optional	_	_	_
Standard shaft (mm)	Ø 4 × 10	Ø 8 × 12	Ø 8 × 12	Ø 8 × 25	Ø 8 × 25
Page	115	117	119	121	123

<sup>1)</sup> max. value, for higher ratios

# **Synchronous Motors**

#### Linear



Type UCC/UCK

Dimensions (mm)  $\varnothing$  28  $\times$  31

- Characteristics Innear motor using modules of the UC range
  integrated non-rotational thread
  - spindle

Travel (mm) 10/13

Voltage (V) 12-230

Thread pitch (mm) 1.0

Speed (mm/s)

50 Hz 4.16/8.33 60 Hz 5/10

Pole number 24/12

Max Force (N) 35

Page 126/130

# **Stepper Motors**







**UCE/UCL** 

 $\varnothing$  28  $\times$  33

- Characteristics small and compact design
  - screw or bayonet
  - integrated spindle with/
- linear motor using modules of the UC range integrated non-rotating
- flange threaded spindle without anti-rotation

Travel (mm)	15	10/13
Travel per step (mm)		0.021/0.041
Thread pitch (mm)	0.5	1.0
Speed (mm/s) at 200 Hz	4.16	4.16/8.33
Step angle (°)		7.5/15
Max. Force (N)	28	35
Page	135	139/144

# **Electronics for Stepper Motors**

#### **Driver Boards**







#### Samotronic102 Evaluation-Kit 2

152


55 × 40	84 × 54	metal case 164 × 130 × 45 (Euro-PCB)
small unipolar board driver	<ul> <li>small bipolar driver board</li> <li>flash controller</li> <li>optional customized software</li> </ul>	<ul> <li>tool for development, test and optimization of stepper drive systems</li> <li>windows-based software</li> <li>control and operation by computer</li> <li>quick parameter setup</li> <li>visualization of speed and position</li> <li>positioning sequences capability</li> </ul>
■ for unipolar motors	for bipolar motors	■ for unipolar and bipolar motors
10-24 VDC	standard version 10–24 VDC enhanced version 10–42 VDC	3–48 VDC (unipolar motors), 8–48 VDC (bipolar motors) 24 VAC
constant voltage drive	constant current drive (chopper controlled) adjustable via potentiometer	constant voltage drive and constant current drive (chopper controlled)
full/half step	full/half step	full/half/micro step
internal or external	internal or external	internal, programmable
<ul><li>inhibit internal clock</li><li>inhibit motor current</li><li>change direction of rotation</li></ul>	<ul><li>inhibit internal clock</li><li>inhibit motor current</li><li>change direction of rotation</li></ul>	<ul> <li>3 digital inputs</li> <li>4 signal outputs</li> <li>1 analog input 010 VDC</li> <li>1 relay contact</li> </ul>
via DIP-switch potentiometer	via DIP-switch potentiometer	RS 232, USB
	<ul> <li>small unipolar board driver</li> <li>for unipolar motors</li> <li>10–24 VDC</li> <li>constant voltage drive</li> <li>full/half step</li> <li>internal or external</li> <li>inhibit internal clock</li> <li>inhibit motor current</li> <li>change direction of rotation</li> <li>via DIP-switch</li> </ul>	<ul> <li>small unipolar board driver</li> <li>flash controller</li> <li>optional customized software</li> <li>for unipolar motors</li> <li>for bipolar motors</li> <li>10–24 VDC</li> <li>standard version 10–24 VDC enhanced version 10–42 VDC</li> <li>constant voltage drive</li> <li>constant current drive (chopper controlled) adjustable via potentiometer</li> <li>full/half step</li> <li>internal or external</li> <li>inhibit internal clock</li> <li>inhibit motor current</li> <li>change direction of rotation</li> <li>via DIP-switch</li> </ul>

153

Page 151

# Synchronous Motors Rotational



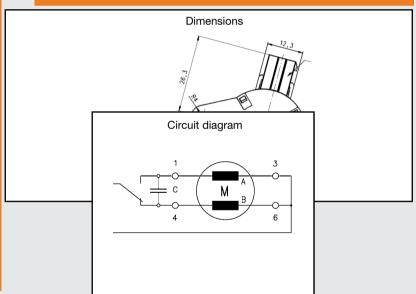



#### UAT3

Dimensions (mm) Ø 20 × 17.2

Voltage (V) 12-60

Speed (rpm) 50 Hz 600 60 Hz 720

Pole number 10

Running torque (cNm) 50 Hz 0.32 (standard magnet, stronger magnet on request) 60 Hz 0.3

Power output (W) 50 Hz 0.20 (standard magnet, stronger magnet on request) 60 Hz 0.23

Gear combination on request



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)

Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### **Standard Data**

"wide-spread" according to DIN IEC 60721-2-1: 2015 Climatic class Ambient temperature operation °C -20 ... +60 Ambient temperature storage °C -40 ... +100 Thermal resistance at f=0 Rtherm 47 K/W Thermal class 130 (B) according to DIN EN 60085: 2008 Approval standard Mounting any position Electrical connection lead wires AWG28, insulation Ø 0.82 mm Protection IP40 according to DIN EN 60529: 2014 Weight

motor can be stopped when voltage is applied, without being overheated

#### **Order Reference**

Rotor stalling

Bearings

Туре	Synchronous Motor	UAT3 3	N E	84   R	E
Rotor shaft, mounting					
Approval	N Approval Standard				
Voltage/Frequency	oltage/Frequency See next page				
Direction	reversible				
Cable	E cable 150 mm with Tyco connector CT 173977-4 (other on request)				


sintered bronze, self-lubricating

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

#### **Technical Data**

D + 14			
Rated frequency	Hz	50	60
Speed n	rpm	600	720
Power consumption	W	1.4	1.4
Power output	W	0.20	0.23
Running torque	cNm	0.32	0.30 (standard magnet, stronger magnet on request)
Rotor inertia J <sub>R</sub>	gcm2	0.26	
Detent torque Ms	mNm	> 0.6	
Tolerance of voltage		standard power	er supply system + 10% / - 10%
Duty cycle		100%	
Winding temperature T <sub>max</sub>	°C	130	
Direction of rotation		reversible	
Rated voltage U <sub>N</sub>	V	24	24
Duty cycle	%	100	100
Resistance R <sub>20</sub>	Ω	430	430
Capacitor C <sub>n</sub> (50Hz)	μF	3.3	2.7
Winding code	50Hz/60Hz	B4	G4

#### Circuit diagram Parallel circuit



switch to

2 = clockwise rotation


3 = counter clockwise rotation


#### Dimensions


motor type	ØD	
UAT30	Ø8	0 -0.05
UAT3A	Ø6	0 -0.05


motor type	ØD	
UAT33	Ø8	0 -0.05
UAT3E	Ø6	0 -0.05


motor type	ØD	
UAT35	Ø8	0 -0.05
UAT3G	Ø6	0 -0.05























#### **UCM**

#### **UCM1/7**



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)
Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### Standard Data

Climatic class "wide-spread" according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +60 Ambient temperature storage  $^{\circ}$ C -20 ... +100 Thermal resistance at f=0 R<sub>therm</sub> 29 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard
Mounting any position

Electrical connection connector type D or N

Protection IP30 according to DIN EN 60529: 2014

Weight 54 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings Sintered bronze, self-lubricating

#### **Order Reference**

Туре	Synd	chronous Motor UCM 1 0 N B4 R D	1
Configuration	1 7	standard magnet stronger magnet	
Rotor shaft, mounting		centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip  C centring 10 mm, shaft 2.0 mm, screw plate  K centring 10 mm, shaft 1.5 mm, clip  C centring 10 mm, shaft 1.5 mm, clip	
Approval	N	Approval Standard	1
Voltage/Frequency		see next pages	1
Direction	R	reversible	1
Connection	D N	see next pages "Connection Types" and page 145 "Connection Types" for B	

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

<sup>\*</sup> regard circuit diagram and connector type

#### **Technical Data**

Rated	frequency	

Performance

Capacitors

Performance


Capacitors

			UCM1	UCM1	UCM7	UCM7
y		Hz	50	60	50	60
	Speed n	rpm	250	300	250	300
	Detent torque Ms	cNm	0.18	0.18	0.36	0.36
	Power consumption	VA	2.2	2.2	2.2	2.2
	Rotor inertia J <sub>R</sub>	gcm2	2.2	2.2	2.4	2.4
	Tolerance of voltage		standard powe	r supply system +10	0%/–10%	
	Duty cycle		100%			
	Winding temperature T <sub>max</sub>	°C	130			
	Direction of rotation		reversible			
	Specific Technical Data Lead	d Wire Versions (Co	nnection N)			
Э	Running torque	cNm	1.15	1.15	1.45	1.45
	Power output	W	0.3	0.36	0.38	0.45
3	Rated voltage U <sub>N</sub>	V	24	110		
	Duty cycle	%	100	100		
	Resistance R <sub>20</sub>	Ω	210	5000		
	Capacitor C <sub>n</sub> (50Hz)	$\mu$ F/V $\pm 10\%$	4.7/40	0.22/200		
	Winding code	50Hz/60Hz	B4/G4	C8/H8		
	Specific Technical Data Con	nector Versions (Co	onnector D and	I B)		
Э	Running torque	cNm	1.4	1.4 1.7	•	1.7
	Power output	W	0.36	0.44 0.4	4	0.53
S	Rated voltage U <sub>N</sub>	V	12	24		
	Duty cycle	%	100	100		
	Resistance R <sub>20</sub>	Ω	53	210		
	Capacitor C₅₀	μF/V ±10%	18/20	4.7/40		


B1

Circuit diagram Parallel circuit 12 V, 24 V, 48 V

Winding code



Parallel circuit 230 V (only for lead wire versions) with 110 V motor and resistor RV




B4

switch to

- clockwise rotation
- counter clockwise rotation
- counter clockwise rotation (for series circuit)


Parallel circuit 230 V (only for lead wire versions) with 110 V motor and capacitor Cv




Series resistor  $R_V = 5.6 \text{ k}\Omega$ , 3 W Series capacitor  $C_V = 0.33 \mu F$ , 250 VAC

# **UCM**

Dimensions Version with Connector D

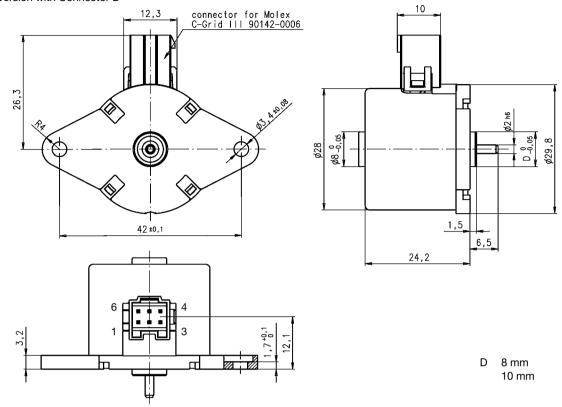

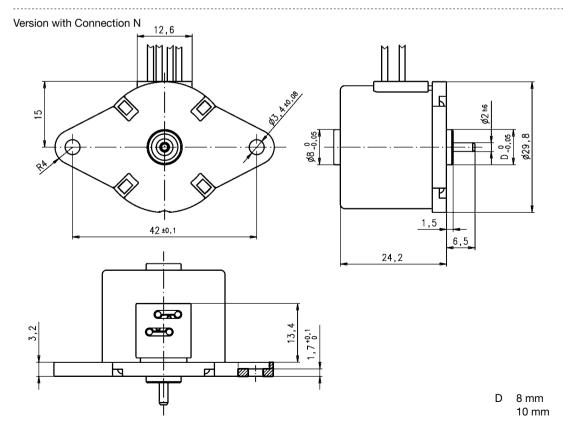

#### **UCR**

#### **UCR1/7**



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)

Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +60 Ambient temperature storage  $^{\circ}$ C -20 ... +100 Thermal resistance at f=0 R<sub>therm</sub> 29 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard Mounting any position

Electrical connection connector type D or N

Protection IP30 according to DIN EN 60529 : 2014

Weight 54 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings Sintered bronze, self-lubricating

#### **Order Reference**

Туре	Syn	nchronous Motor UCR 1 0 N B4 R	D
Configuration	1 7	standard magnet stronger magnet	
Rotor shaft, mounting		centring 8 mm, shaft 2.0 mm, screw plate E centring 10 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate K centring 10 mm, shaft 1.5 mm, screw plate centring 8 mm, shaft 2.0 mm, clip A centring 10 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip C centring 10 mm, shaft 1.5 mm, clip	
Approval	N	Approval Standard	
Voltage/Frequency		see next pages	
Direction	R	reversible	
Connection	D N	see next pages "Connection Types" and page 145 "Connection Types" for B Cable	

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes


<sup>\*</sup> regard circuit diagram and connector type

#### **UCR**


#### **Technical Data**

			UCR1	UCR1	UCR7	UCR7	
Rated frequency		Hz	50	60	50	60	
	Speed n	rpm	500	600	500	600	
	Detent torque Ms	cNm	0.2	0.2	0.45	0.45	
	Power consumption	VA	2.4	2.5	2.3	2.4	
	Rotor inertia J <sub>R</sub>	gcm2	2.1	2.1	2.4	2.4	
	Tolerance of voltage		standard p	oower supply syst	em +10%/-10%		
	Duty cycle		100%				
	Winding temperature T <sub>max</sub>	°C	130				
	Direction of rotation		reversible				
	Specific Technical Data Le	ead Wire Versions	(Connection I	N)			
Performance	Running torque	cNm	0.76	0.72	0.93	0.85	
	Power output	W	0.40	0.45	0.49	0.53	
Capacitors	Rated voltage U <sub>N</sub>	V	12	24	110		
	Duty cycle	%	100	100	100		
	Resistance R <sub>20</sub>	Ω	60	230	5500		
	Capacitor C <sub>n</sub> (50Hz)	μF/V ±10%	22/20	5.6/40	0.27/200		
	Winding code	50Hz/60Hz	B1/G1	B4/G4	C8/H8		
	Specific Technical Data Co	onnector Versions	(Connector D	and B)			
Performance	Running torque	cNm	0.94	0.87	1.2	1.05	
	Power output	W	0.50	0.54	0.63	0.66	
Capacitors	Rated voltage U <sub>N</sub>	V	12	24			
	Duty cycle	%	100	100			
	Resistance R <sub>20</sub>	Ω	59	230			
	Capacitor C <sub>n</sub> (50Hz)	$\mu$ F/V $\pm 10\%$	22/20	5.6/40			
	Winding code	50Hz/60Hz	B1	B4			

Circuit diagram Parallel circuit 12 V, 24 V, 48 V, 110 V




Parallel circuit 230 V (only for lead wire versions) with 110 V motor and resistor  $R_{\rm V}$ 




#### switch to


- 1 clockwise rotation
- 4 counter clockwise rotation
- 6 counter clockwise rotation (for series circuit)

Parallel circuit 230 V (only for lead wire versions) with 110 V motor and capacitor  $C_{\rm V}$ 




Series resistor Rv = 5.6 k $\Omega$ , 3 W Series capacitor Cv = 0.33  $\mu$ F, 250 VAC



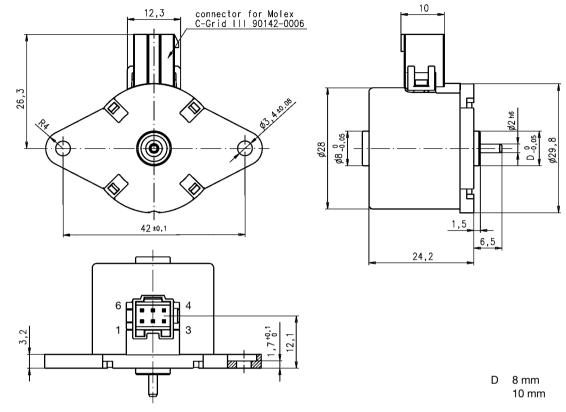

Version with Connection N

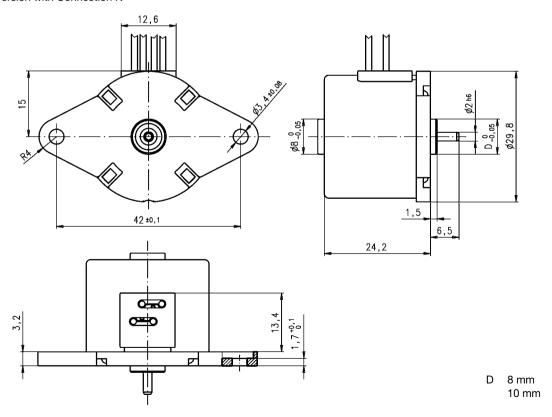

#### **UBR1**

#### **UBR1**

Dimensions (mm)	Ø 36 x 21
Voltage (V)	12–230
Speed (rpm) 50 Hz 60 Hz	250
Pole number	
Running torque (cNm) 50 Hz 60 Hz	0.77
	0.20 0.24
Gear combination	D, M, B, F, V, J



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)

Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation °C -15...+55

Ambient temperature storage °C -20...+100

Thermal resistance at f=0 R<sub>therm</sub> 27 K/W

Thermal class 105 (A) according to DIN EN 60085: 2008

Approval standard (UL/CSA on request)

Mounting any position Electrical connection cable

Protection IP40 according to DIN EN 60529: 2014

Weight 60 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating

Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Syn	chronous Motor		UBR1 0	Ν	B4	R	E	į
Rotor shaft, mounting	-	centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate	A C E K	centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip centring 10 mm, shaft 2.0 mm, screw plate centring 10 mm, shaft 1.5 mm, screw plate				1	
Approval	N	Approval Standard							
Voltage/Frequency		See next page				.,			
Direction		reversible					•		
Cable	E	cable 150 mm (other on request)							


All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes


#### **Technical Data**

Rated frequency	Hz	50	60			
Speed n	rpm	250	300			
Power consumption	W	1.3	1.3			
Power output	W	0.20	0.24			
Running torque	cNm	0.77	0.77			
Rotor inertia JR	gcm2	2.8				
Detent torque Ms	cNm	0.19	0.19			
Tolerance of voltage		standar	d power s	supply sys	tem + 10%	/ - 10%
Winding temperature T <sub>max</sub>	°C	105				
Direction of rotation		reversib	ole			
Rated voltage U <sub>N</sub>	V	12	24	48	110	230
Duty cycle	%	100	100	100	100	100
Resistance R <sub>20</sub>	Ω	104	385	1580	9160	11800
Capacitor C <sub>n</sub> (50Hz, 60Hz)	μF/V ±10%	12/20	3.3/34	0.82/70	0.15/170	0.22;0.12/170
Winding code	50Hz/60Hz	B1/G1	B4/G4	C1/H1	D1/J1	D5/J5

Circuit diagram Parallel circuit 12V, 24V, 48V, 110V




Series circuit 230V (for motors with




Parallel circuit 230V

Rv=12k  $\Omega$  /1.5W for motors with resistance R20= 9160  $\Omega,$  code D1/J1



Parallel circuit 230V


Cv=0.18  $\mu F$  (50Hz) / 0.15  $\mu F$  (60Hz) / 200Vac with resistance  $R_{\rm 20}$  = 9160  $\Omega$ 



Red = clockwise rotation Black = counter clockwise rotation

#### Dimensions Mounting with screw plate

## Mounting with snap-on clip (item no. 4199 48230)

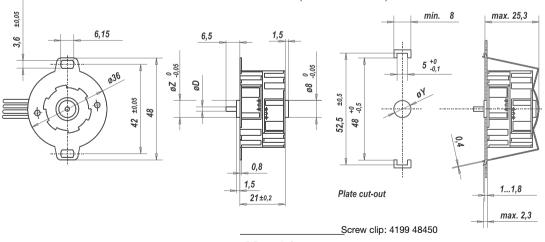

øD Rotor shaft ø 2 h6 ø 1.5 js8 øZ øY 8 8F8 10 10F8

#### **UBR2**

#### UBR<sub>2</sub>

Dimensions (mm)	Ø 36 x 21
Voltage (V)	
Speed (rpm) 50 Hz 60 Hz	500
Pole number	12
Running torque (cNm) 50 Hz 60 Hz	
Power output (W) 50 Hz 60 Hz	
Gear combination	D, M, B, F, V, J



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)
Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015 Ambient temperature operation °C -15...+55 Ambient temperature storage °C -20...+100 Thermal resistance at f=0 R<sub>therm</sub> 27 K/W 105 (A) according to DIN EN 60085: 2008 Thermal class standard (UL/CSA on request) Approval Mounting any position Electrical connection cable Protection IP40 according to DIN EN 60529: 2014 Weight motor can be stopped when voltage is applied, without being overheated Rotor stalling Bearings sintered bronze, self-lubricating Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Synchronous Motor UBR2						B4	R	E	i
Rotor shaft, mounting		centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate	A C E K	centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip centring 10 mm, shaft 2.0 mm, screw plate centring 10 mm, shaft 1.5 mm, screw plate						
Approval										
Voltage/Frequency	reversible									-
Direction	n E cable 150 mm (other on request)									
Cable										


All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

#### **Technical Data**


	Rated frequency Hz		50	60					
	Speed n rpm		500	600					
	Power consumption W Power output W Running torque cNm		1.6	1.6					
			0.33	0.38					
			0.64	0.61					
	Rotor inertia J <sub>R</sub> gcm2		2.8						
	Detent torque Ms	cNm	0.21						
	Tolerance of voltage	standard power supply system + 10% / - 10%							
	Winding temperature T <sub>max</sub>	°C	105						
	Direction of rotation		reversible						
UBR2	Rated voltage U <sub>N</sub>	V	12	24	48	110	230		
	Duty cycle	%	100	100	100	100	100		
	Resistance R <sub>20</sub>	Ω	87	344	1370	7650	12600		
	Capacitor C <sub>n</sub> (50Hz, 60Hz)	μF/V ±10%	15/20	3.9/40	1/70	0.18/170	0.27;0.22/170		
	Winding code	50Hz/60Hz	B1/G1	B4/G4	C1/H1	D1/J1	D5/J5		
UBR3	Rated voltage U <sub>N</sub>	V	12	24	48				
	Duty cycle	%	100	100	100				
	Resistance R <sub>20</sub>	Ω	87	344	1370				
	Capacitor C <sub>n</sub> (50Hz)	μF/V ±10%	15/20	3.9/40	1/70				
	Winding code	50Hz/60Hz	B1/G1	B4/G4	C1/H1				

Circuit diagram Parallel circuit 12V, 24V, 48V, 110V




Parallel circuit 230V

Rv=8.2k  $\Omega/1.5W$  for motors with resistance R<sub>20</sub>= 7650  $\Omega$ , code D1/J1




Series circuit 230V (for motors with resistance R<sub>20</sub>= 12600 Ω)




Parallel circuit 230V

Cv=0.22  $\mu F$  (50Hz)/ 0.18  $\mu F$  (60Hz)/200 Vac with resistance R20=7650  $\Omega$ 



Red = clockwise rotation Black = counter clockwise rotation

#### Dimensions Mounting with screw plate

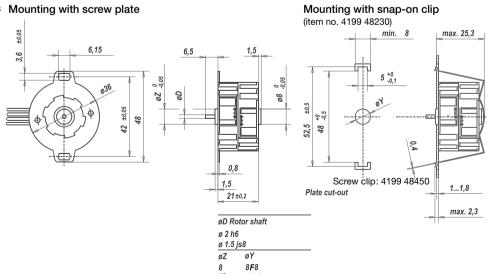

## **UDR**

#### UDR<sub>1</sub>

Dimensions (mm)	Ø 48 x 24
Voltage (V)	12–230
Speed (rpm) 50 Hz 60 Hz	
Pole number	
Running torque (cNm) 50 Hz 60 Hz	
	0.68 0.75
Gear combination	D, M, B, F, V, J



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)
Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation °C -15...+60

Ambient temperature storage °C -20...+100

Thermal resistance at f=0 R<sub>therm</sub> 18 K/W

Thermal class 105 (A) according to DIN EN 60085 : 2008

Approval standard/UL/CSA Mounting any position
Electrical connection cable

Protection IP30 according to DIN EN 60529 : 2014

Weight 132 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating


Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Synchronous Motor UDR1 ; 00 ; N ; B4 ; R ; N	į
Rotor shaft, mounting	o containing of the trians, on p	
Approval	N Approval Standard U Approval UL/CSA	
Voltage/Frequency	See next page	-
Direction	reversible	-
Cable	N cable 150 mm (other on request)	

Rated frequency	Hz	50	60			
Speed n	rpm	500	600			
Power consumption	W	2.1	2.2			
Power output	W	0.68	0.75			
Running torque	cNm	1.3	1.2			
Rotor inertia J <sub>R</sub>	gcm2	6.3				
Detent torque Ms	cNm	0.30				
Tolerance of voltage		standard	power supp	ly syste	m + 10% /	- 10%
Winding temperature T <sub>max</sub>	°C	105				
Direction of rotation		reversible				
Rated voltage U <sub>N</sub>	V	12	24	48	110-120	230
Duty cycle	%	100	100	100	100	100
Resistance R <sub>20</sub>	Ω	50	200	800	5000	19000
Capacitor C <sub>n</sub> (50Hz, 60Hz)	μF/V ±10%	27;22/20	6.8;4.7/34	1.5/70	0.27/170	0.068/340
Winding code	50Hz/60Hz	B1/G1	B4/G4	C1/H1	D1/J1	D5/J5


#### Circuit diagram Parallel circuit




Red = clockwise rotation

Black = counter clockwise rotation


#### Dimensions

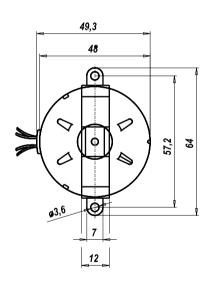

Mounting with screw clip (item no. 4186 48080)

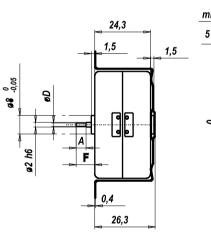

Mounting with snap-on clip (item no. 4199 48040)



øD Rotor shaft ø 1.5 js8 +0,007 -0,007

ø 2 h6 <sup>0</sup>-0,006

Dimension A	Dimension F
4,3	6,5
_	8,2

## **UDS**

#### UDS<sub>1</sub>

Dimensions (mm) Ø 48 x 18.5

Voltage (V) 6–230

Speed (rpm) 50 Hz 600

Pole number 12

Running torque (cNm) 50 Hz 0.77 60 Hz 0.68

Power output (W) 50 Hz 0.40 60 Hz 0.43

Gear combination D, M, B, F, V, J



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)

Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15...+60 Ambient temperature storage  $^{\circ}$ C -20...+100 Thermal resistance at f=0 R<sub>therm</sub> 17 K/W

Thermal class 105 (A) according to DIN EN 60085 : 2008 for approval standard

130 (B) according to DIN EN 60085 : 2008 for approval UL/CSA

Approval standard/UL/CSA
Mounting any position
Electrical connection cable

Protection IP40 according to DIN EN 60529 : 2014

Weight 102 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings plastic, self-lubricating


Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Syno	chronous Motor	UDS1 ;	0	N	; B4	1	R	;	N	i
0	centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 2.0 mm, clip									
N U	Approval Standard Approval UL/CSA					1				
	See next page					-		!		-
R L	clockwise rotation Counter-clockwise rotation									
N	cable 150 mm (other on request)					<b>-</b>				
	0 1 N U	1 centring 8 mm, shaft 2.0 mm, clip  N Approval Standard U Approval UL/CSA See next page  R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation	0 centring 8 mm, shaft 1.5 mm, clip 1 centring 8 mm, shaft 2.0 mm, clip N Approval Standard U Approval UL/CSA See next page R clockwise rotation L Counter-clockwise rotation

	Rated frequency	Hz	50	60										
	Speed n	rpm	500	600										
	Power consumption*	W	2.4	1.8										
	Power output	W	0.40	0.43										
	Running torque	cNm	0.77	0.68										
	Rotor inertia J <sub>R</sub>	gcm2	11											
	Detent torque Ms	cNm	0.23 (iı	n directio	on of rota	ation)								
	Tolerance of voltage		standa	ard powe	r supply	system	+ 10% /	- 10%						
	Winding temperature T <sub>max</sub>	°C	105 fo	r approv	al Stand	ard (N)								
			130 fo	r approv	al UL/CS	SA								
	Direction of rotation		clockv	vise or co	ounter-c	lockwise	)							
UDS1	Rated voltage U <sub>N</sub>	V	6	12	24	36	42	48	60	110	110-120	230 1	110/230	24/48
	Duty cycle	%	100	100	100	100	100	100	100	100	100	100	100	100
	Resistance R <sub>20</sub>	Ω	5.5	24	78	193	285	330	500	1830	1830	7500 2	2180/5500	105/260
	Winding code		A6/F6	B1/G1	B4/G4	B6/G6	B8/G8	C1/H1	C2/H2	C8/H8	D1/J1	D5/J5 F	R1/S1	R4/S4
UDS1	Rated voltage U <sub>N</sub>	V	6	12	24	48	100	110	110-120	230	110/230	24/48		
Approbation U	Duty cycle	%	100	100	100	100	100	100	100	100	100	100		
	Resistance R <sub>20</sub>	Ω	5.5	24	78	330	1350	1830	1830	7500	2180/5500	) 105/20	6	
	Winding code		A6/F6	B1/G1	B4/G4	C1/H1	C7/H7	C8/H8	D1/J1	D5/J5	R1/S1	R4/S4		
UDS3	Rated voltage U <sub>N</sub>	V	6	12	24	36	42	48	60	110	230	110/23	0 24/48	
	Duty cycle	%	100	100	100	100	100	100	100	100	100	100	100	
	Resistance R <sub>20</sub>	Ω	5.5	24	78	193	285	330	500	1830	7500	2180/5	500 105/2	60
	Winding code		A6/F6	B1/G1	B4/G4	B6/G6	B8/G8	C1/H1	C2/H2	C8/H8	D5/J5	R1/S1	R4/S4	
UDS4	Rated voltage U <sub>N</sub>	V	12	24	42	48	110-120	230						
	Duty cycle	%	100	100	100	100	100	100						
	Resistance R <sub>20</sub>	Ω	23	98	322	390	2200	8700						
	Winding code		B1/G1	B4/G4	B8/G8	C1/H1	D1/J1	D5/J5						

\*can vary for different windings (rated voltages)

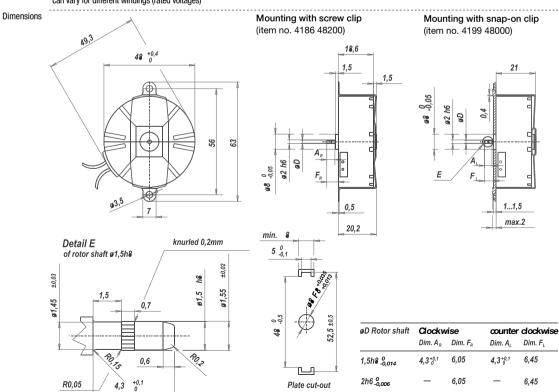

## **UFM**

#### UFM1

Dimensions (mm) Ø 52 x 28

Voltage (V) 12–230


Speed (rpm) 50 Hz 250 300

Pole number 24

Running torque (cNm) 50 Hz 3.2 60 Hz 3.0

Power output (W) 50 Hz 0.8 60 Hz 0.9

Gear combination D, M, B, F, V, J (i ≤ 2k), O, P

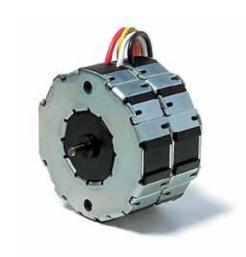

Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)

Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Thermal class 105 (A) according to DIN EN 60085 : 2008 (130 / B on request)

Approval standard (UL/CSA on request)

Mounting any position

Electrical connection lead wires AWG22, insulation Ø 1.72  $\pm$  0.08 mm Protection IP40 according to DIN EN 60529 : 2014

Weight 180 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating


Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Synchronous Motor	UFM1 0 N B4 R N	į
Rotor shaft, mounting		E centring 10 mm, shaft 3.0 mm, screw plate K centring 10 mm, shaft 2.0 mm, screw plate M centring 10 mm, shaft 1.5 mm, screw plate B centring 10 mm, shaft 3.0 mm, clip A centring 10 mm, shaft 2.0 mm, clip C centring 10 mm, shaft 1.5 mm, clip	
Approval	N Approval Standard		
Voltage/Frequency	See next page		
Direction	reversible		
Cable	N cable 150 mm (other on request)		_;

Rated frequency	Hz	50	60			
Speed n	rpm	250	300			
Power consumption	W	4	3.1			
Power output	W	8.0	0.9			
Running torque	cNm	3.2	3.0			
Rotor inertia J <sub>R</sub>	gcm2	14.4				
Detent torque Ms	cNm	0.38				
Tolerance of voltage		standard	l power sup	ply system	+ 10% / - 10%	
Winding temperature T <sub>max</sub>	°C	105				
Direction of rotation		reversibl	е			
Rated voltage U <sub>N</sub>	V	12	24	48	110-120	230
Duty cycle	%	100	100	100	100	100
Resistance R <sub>20</sub>	Ω	15	59	240	1390	5690
Capacitor C <sub>n</sub> (50Hz, 60Hz)	μF/V ±10%	39;33/20	10;8.2/45	2.2;1.8/70	0.39;0.33/230	0.1;0.082/440
Winding code	50Hz/60Hz	B1/G1	B4/G4	C1/H1	D1/J1	D5/J5


#### Circuit diagram Parallel circuit





Red = clockwise rotation

Black = counter clockwise rotation

#### Dimensions

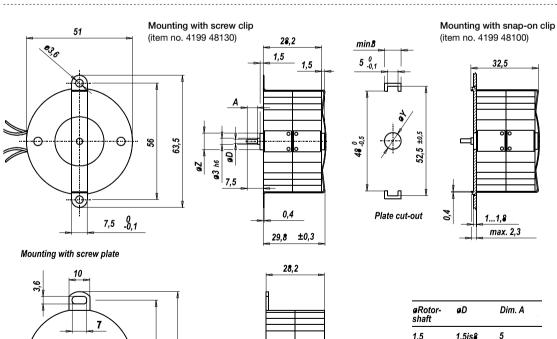






øRotor- shaft	øD	Dim. A		
1,5	1,5js <b>8</b>	5		
2	2js <b>8</b>	5		
3	3h6	-		
	øΖ	øY		
	<b>8</b> .0,05	8F8		
	10 -0,05	10 <i>F</i> 8		

## **UFU**

#### UFU1

Dimensions (mm)	Ø 52 x 28
Voltage (V)	24–230
Speed (rpm) 50 Hz 60 Hz	
Pole number	
Running torque (cNm)	
50 Hz	3.0
60 Hz	2.8
Power output (W)	
50 Hz	1.2
60 Hz	1.3
0	D.M.B. E.V. 1/3 + 01/2 O. D.
Gear combination	D, M, B, F, V, J ( $i \le 2k$ ), O, P

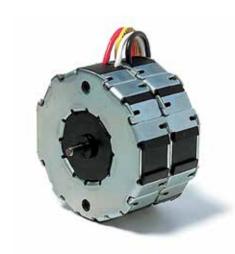

Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)

Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation °C -15...+55

Ambient temperature storage °C -20...+100

Thermal resistance at f=0 R<sub>therm</sub> 13 K/W

Thermal class 105 (A) according to DIN EN 60085 : 2008 (130 / B on request)

Approval standard
Mounting any position
Electrical connection cable

Protection IP40 according to DIN EN 60529: 2014

Weight 180 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating


Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Synchronous Motor	UFU1 00 N B4 R N	i
Rotor shaft, mounting		E centring 10 mm, shaft 3.0 mm, screw plate K centring 10 mm, shaft 2.0 mm, screw plate M centring 10 mm, shaft 1.5 mm, screw plate B centring 10 mm, shaft 3.0 mm, clip A centring 10 mm, shaft 2.0 mm, clip C centring 10 mm, shaft 1.5 mm, clip D centring 12 mm, shaft 3.0 mm, clip	
Approval	N Approval Standard		-
Voltage/Frequency	See next page		-
Direction	reversible		-
Cable	N cable 150 mm (other on request)		.;

Rated frequency	Hz	50	60	
Speed n	rpm	375	450	
Power consumption	W	3.2	3.5	
Power output	W	1.2	1.3	
Running torque	cNm	3.0	2.8	
Rotor inertia J <sub>R</sub>	gcm2	14.4		
Detent torque Ms	cNm	0.38		
Tolerance of voltage		standard p	ower supply system	+ 10% / - 10%
Winding temperature T <sub>max</sub>	°C	105		
Direction of rotation		reversible		
Rated voltage U <sub>N</sub>	V	24	110	230
Duty cycle	%	100	100	100
Resistance R <sub>20</sub>	Ω	95	2200	8400
Capacitor C <sub>n</sub> (50Hz, 60Hz)	μF/V ±10%	10;8.2/48	0.47;0.39/220	0.1;0.082/460
Winding code	50Hz/60Hz	B4/G4	C8/H8	D5/J5


#### Circuit diagram Parallel circuit



Red = clockwise rotation

Black = counter clockwise rotation

#### Dimensions

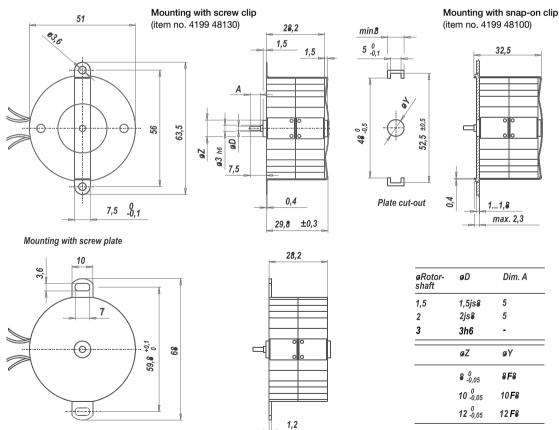


Lead wires: AWG 22 (0.34 mm²), insulation diameter Ø1.72  $\pm$ 0.08 mm, 6 mm stripped

## **UFR**

#### UFR1/UFR3/UFR4

Dimensions (mm)	Ø 52 x 28 / Ø 52 x 42 / Ø 52 x 56
Voltage (V)	12–230
Speed (rpm) 50 Hz 60 Hz	
Pole number	12
	2.4/3.1/4.5 2.2/2.6/4.0
	1.3 / 1.6 / 2.4 1.4 / 1.6 / 2.5
Gear combination	D, M, B, F, V, J ( $i \le 2k$ ), O, P

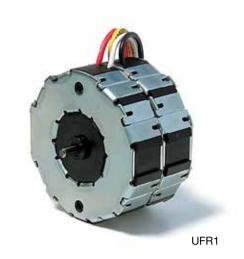

Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)

Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15...+55 Ambient temperature storage  $^{\circ}$ C -20...+100

Thermal resistance at f=0 R<sub>therm</sub> 11 K/W (UFR1), 7 K/W (UFR4)

Thermal class 105 (A) according to DIN EN 60085 : 2008 (130 / B on request)

Approval standard (UL/CSA on request)

Mounting any position

Electrical connection lead wires AWG22, insulation Ø 1.72  $\pm$  0.08 mm

Protection IP40 according to DIN EN 60529: 2014

Weight 180 g (UFR1), 370 g (UFR4)

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating


Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**


Туре	Synch	nronous Motor		UFR	1	0	N	B4	R	N	i
Configuration	1 3 4	Two coils Three coils Four coils								 	
Rotor shaft, mounting		centring 8 mm, shaft 3.0 mm, clip centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 3.0 mm, screw plate* centring 8 mm, shaft 2.0 mm, screw plate* centring 8 mm, shaft 1.5 mm, screw plate*	B A C D E K M	centring 10 mm, shaft 3.0 mm, clip centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip centring 12 mm, shaft 3.0 mm, clip centring 10 mm, shaft 3.0 mm, so centring 10 mm, shaft 2.0 mm, so centring 10 mm, shaft 1.5 mm, so	o o o rew pla rew pla	ate*					
Approval	N	Approval Standard								! ! !	
Voltage/Frequency		See next page								! ! !	-
Direction		reversible									
Cable	N	cable 150 mm (other on request)									
	* scre	ew plate not for UFR3 and UFR4									•

UFR1	Rated frequency Speed n Power output Pmech Running torque Mn Power consumption Pel Detent torque Ms Rotor inertia JR Rated voltage UN	Hz rpm W cNm W cNm gcm2 V	50 500 1.3 2.4 3.3 0.39 14.2	60 600 1.4 2.2 3.6	48	110	230
	Duty cycle	%	100	100	100	100	100
	Resistance R <sub>20</sub>	Ω	27	105	400	2400	9100
	Capacitor C <sub>n</sub> (50Hz, 60Hz) Winding code	μF/V ±10% 50Hz/60Hz	39;33/24 B1/G1	10;8.2/45 B4/G4	2.7;2.2/90 C1/H1	0.47;0.39/230 C8/H8	0.12;0.10/440 D5/J5
UFR3	Rated frequency	Hz	50	60			
	Speed n	rpm	500	600			
	Power output Pmech	W	1.6	1.6			
	Running torque Mn	cNm	3.1	2.6			
	Power consumption Pel	W	6.1	5.1			
	Detent torque Ms	cNm	0.46				
	Rotor inertia J <sub>R</sub>	gcm2	17				
	Rated voltage U <sub>N</sub>	V	12	24	48	110	230
	Duty cycle	%	100	100	100	100	100
	Resistance R <sub>20</sub>	Ω	19	70	280	1520	5850
	Capacitor C <sub>n</sub> (50Hz, 60Hz)	μF/V ±10%	150;100/12	39;27/24	10;6.8/48	1.8;1.2/110	0.47;0.33/230
	Winding code	50Hz/60Hz	B1/G1	B4/G4	C1/H1	C8/H8	D5/J5
UFR4	Rated frequency	Hz	50	60			
	Speed n	rpm	500	600			
	Power output Pmech	W	2.4	2.5			
	Running torque Mn	cNm	4.5	4.0			
	Power consumption Pel	W	6.4	6.9			
	Detent torque Ms	cNm	0.68				
	Rotor inertia J <sub>R</sub>	gcm2	24.2				
	Rated voltage U <sub>N</sub>	V	24	48	110	230	
	Duty cycle	%	100	100	100	100	
	Resistance R <sub>20</sub>	Ω	56	210	1200	4800	
	Capacitor C <sub>n</sub> (50Hz, 60Hz)	μF/V ±10%	18;15/45	4.7;3.9/90	0.82;0.68/200	•	
	Winding code	50Hz/60Hz	B4/G4	C1/H1	C8/H8	D5/J5	
	Tolerance of voltage Winding temperature T <sub>max</sub>	°C	standard po 105 reversible	ower supply s	system + 10%	10%	
	Direction of rotation		reversible				


Circuit diagram UFR1 Parallel circuit



UFR4 Parallel circuit



UFR3 Parallel circuit





Red = clockwise rotation


## **UFR**

#### Dimensions



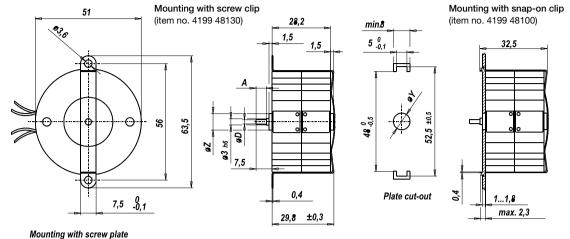







øRotor- shaft	øD	Dim. A
1,5	1,5js8	5
2	2js8	5
3	3h6	-
	øΖ	øY
	8 <sub>-0,05</sub>	8F8
	10 <sub>-0,05</sub>	10 <i>F</i> 8

UFR3

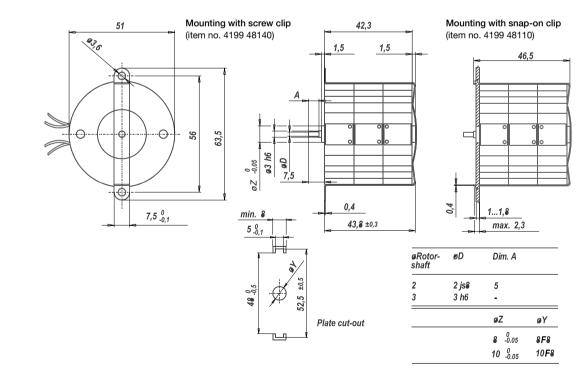

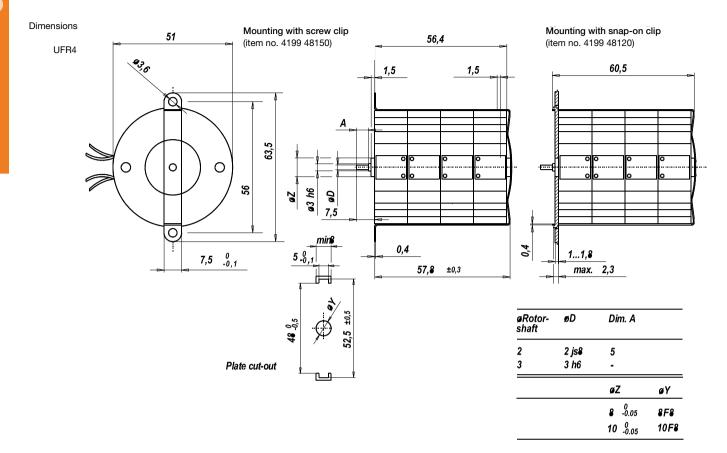

## **UPU**

#### **UP (SM6443; SM6444)**

Dimensions (mm) ∅ 64 x 43

Voltage (V) 12–230

Speed (rpm) 50 Hz 375
60 Hz 450

Pole number 16

Running torque
(cNm) 50 Hz 11.1–15.2 (UPU1); 26.0–30.4 (UPU5)
60 Hz 9.0–14.5 (UPU1); 21–25.5 (UPU5)

Power output (W)
50 Hz 4.4–6.0 (UPU1); 10.2–11.9 (UPU5)
60 Hz 4.2–6.8 (UPU1); 9.9–12.0 (UPU5)



Note: Running torque = Pull-out torque (starting motor at no load, then torque increase)
Running torque and Power output are minimum values, at rated voltage and motor temperature 23°C

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +40 Ambient temperature storage  $^{\circ}$ C -20 ... +100

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard Mounting any position

Electrical connection lead wires AWG22, insulation Ø 1.6  $\pm$  0.1 mm Protection IP30 according to DIN EN 60529 : 2014

Weight 500 g (UPU1); 550 g (UPU5)

Rotor stalling motor can be stopped when voltage is applied, without being overheated


Bearings Sintered bronze, self-lubricating

#### **Order Reference**

Туре	Sync	chronous Motor	UPU	<u>.</u> j :	H	1	N	B4	R	E	
Configuration	1 5	standard magnet stronger magnet							! ! ! !	 	
Rotor shaft, mounting	1 2 A C	centring 10 mm, shaft length 8,1 mm, screw plate centring 10 mm, shaft length 15,5 mm, screw plate centring 14 mm, shaft length 8,1 mm, screw plate centring 14 mm, shaft length 15,5 mm, screw plate							1 1 1 1 1 1 1 1		
Approval	N	standard						! ! !	! ! !	 	i
Voltage/Frequency		see next page							! !	 	
Direction	R	reversible									1
Cable	E	150 mm (other upon request)									


UPU1			Standar	d			S2 version (Z20)	·
	Rated frequency	Hz	50		60		50	60
	Speed	rpm	375		450		375	450
	Running torque Mn	cNm	11.1		9.0		15.2	14.5
	Power output	W	4.4		4.2		6.0	6.8
	Power consumption	VA	10.5		13.4		16.8	19.4
	Detent torque MS	cNm	1.7		1.7		1.7	1.7
	Winding temperature increase	K	95		100		90 (S2 20 min)	
	Weight	g	500		500		500	500
	Standard windings							
	Rated voltage U <sub>N</sub>	V	24	115	230			
	Duty cycle	%	100	100	100			
	Resistance R <sub>20</sub>	Ω	26	560	2450			
	Capacitor C(50/60 Hz)	μF ±10%/V	30/63	1,3/250	0,33/500	)		
	Winding code		B4/G4	D0/J0	D5/J5			
UPU5			Special	version (Z	21)		Standard	
	Rated frequency	Hz	50		60		50	60
	Speed	rpm	375		450		375	450
	Running torque Mn	cNm	26.0		21.0		30.4	25.5
	Power output	W	10,2		9,9		11.9	12.0
	Power consumption	VA	26		28		26.3	33,5
	Detent torque MS	cNm	6		6		6	6
	Winding temperature increase	K	85 (S2 6	6,5 min)	85 (S2 6	,5 min)	95 (S2 5 min)	95 (S2 5 min)
	Weight	g	550		550		550	550
	Standard windings							
	Rated voltage U <sub>N</sub>	V	24	48	115	230		
	Duty cycle	%						
	Resistance R <sub>20</sub>	Ω	9,5	37	230	810		
	Capacitor C(50/60 Hz)	μF ±10%/V	82/63	20/160	3,3/250	0,82/50	0	
	Winding code		B4/G4	C1/H1	D0/J0	D5/J5		


Circuit diagram Clockwise rotation

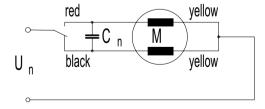


## **UPU**


Dimensions mounting dimensions UP with screw plate

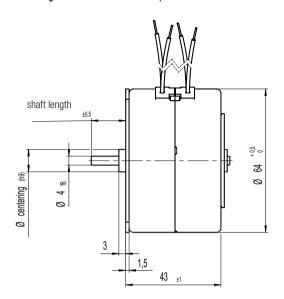

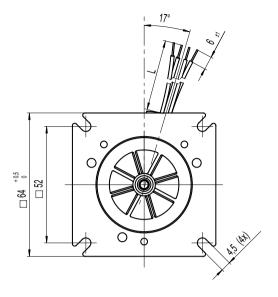


## **Chart: Torque versus Voltage**

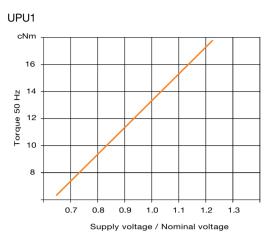


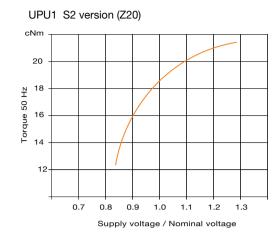

## Chart: Possible S2 ON time versus load torque


UPU5 special version (Z21)

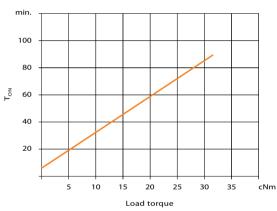

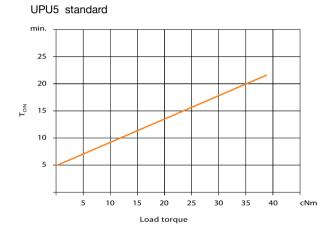


## **Chart: Torque versus Voltage**

UPU5 special version (Z21)

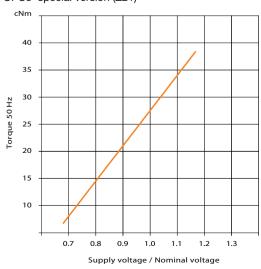


#### UPU5 standard

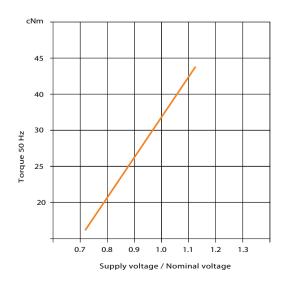

# Stepper Motors Rotational



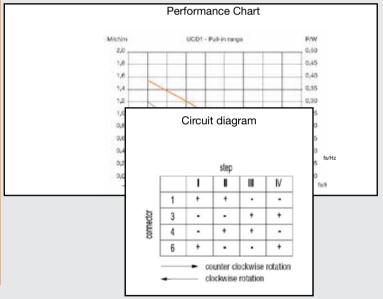



#### 3/4



Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -20...+60 Ambient temperature storage  $^{\circ}$ C -40...+100 Thermal resistance at f=0 Rtherm 47 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard
Mounting any position

Electrical connection lead wires AWG28, insulation Ø 0.82 mm Protection IP40 according to DIN EN 60529 : 2014

Weight 22 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating

#### **Order Reference**

Type	Step	per Motor	UAG	; 3	3 ;	3	; 1	N ;	05	; R	E	i
Configuration	3 4	bipolar unipolar								1 1 1 1 1		-
Rotor shaft, mounting	_	centring 8 mm, mounting plate with long holes centring 8 mm, mounting plate (for clipping) centring 6 mm, mounting plate with long holes centring 6 mm, mounting plate (for clipping)								1 1 1 1 1 1 1 1 1		
Approval	N	Approval Standard						!		! !		ł
Resistance		See next page Resistance per winding for bipolar or unipolar.										1
Direction		reversible									!	i
Cable	E	cable 150 mm with Tyco connector CT 173977-4 1-6 (other on request)										

bipolar (UAG3)	Rated voltage UN	V	12	6
	Duty cycle	%	100	100
	Resistance R <sub>20</sub>	Ω	150	40
	Winding code		05	07

unipolar (UAG4) Rated voltage UN  $\,$  V  $\,$  12

 $\begin{array}{lll} \text{Steps per revolution} & 20 \\ \text{Winding temperature $T_{\text{max}}$} & 130^{\circ} \text{ C} \\ \text{Rotor inertia $J_{\text{R}}$} & 0.26 \text{ gcm}^2 \\ \end{array}$ 

Holding torque M<sub>H</sub> 0.53 cNm (UAG3) 0.39 cNm (UAG4) (standard magnet, stronger magnet on request)


 $\begin{array}{ll} \mbox{Detent torque MH} & > 0.6 \mbox{ mNm} \\ \mbox{Direction of rotation} & \mbox{reversible} \end{array}$ 

#### Dimensions


motor type	ØD	
UAG30	Ø8	0 -0.05
UAG3A	Ø6	0 -0.05
UAG40	Ø8	0 -0.05
UAG4A	Ø6	0 -0.05


motor type	ØD	
UAG33	Ø8	0 -0.05
UAG3E	Ø6	0 -0.05
UAG43	Ø8	0 -0.05
UAG4E	Ø6	0 -0.05


motor type	ØD	
UAG35	Ø8	0 -0.05
UAG3G	Ø6	0 -0.05
UAG45	Ø8	0 -0.05
UAG4G	Ø6	0 -0.05





Use bolts with thread length 4mm max. Screw in torque 10cNm max.
















#### Dimensions

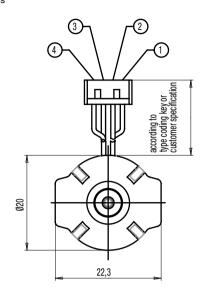

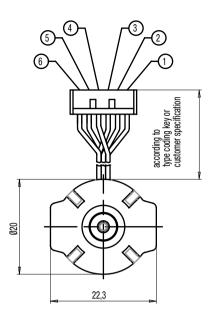

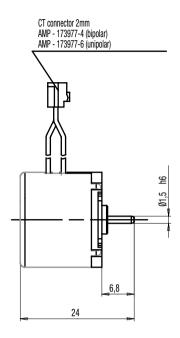



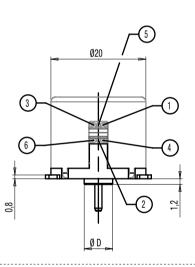

#### Circuit diagram


bipolar										
step										
0 1 11 111 111										
	1	+	+	-	•	+				
_	2	+	-	-	+	+				
wire	3	-	•	+	+	-				
Ш	4	-	+	+	-	-				


ıını	ทก	lar
uiii	PO	u


		step				
		0				IV
	1	-	-			-
	2	-			-	-
	3	+	+	+	+	+
wire	4	+	+	+	+	+
	5			-	-	
	6		-	-		


\_\_\_\_clockwise rotation


counter clockwise rotation

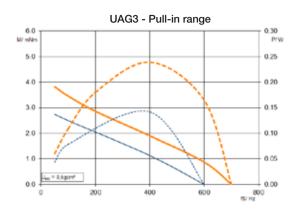


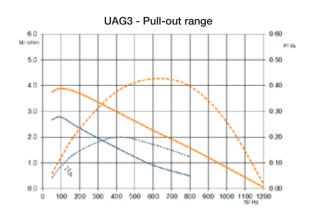

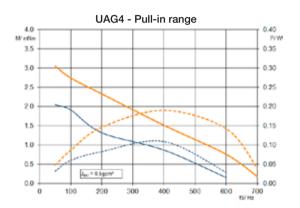

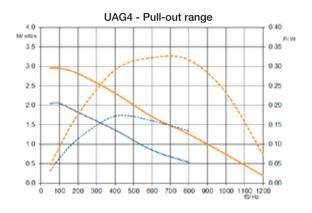



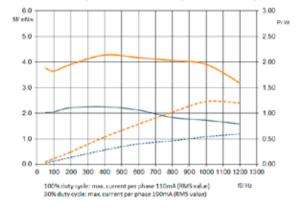

M - Duty cycle 30 %
M - Duty cycle 100%

P - Duty cycle 30 %
---- P - Duty cycle 100 %

#### UCD1/7; UCD2/8

Dimensions (mm) Ø 28 x 24

Step angle (°) 7.5

Holding torque \* (cNm) 1.4–2.3

Detent torque (cNm) 0.15–0.30

Winding bipolar/unipolar

Gear combination on request



<sup>\*</sup> values for connector version (connection B or D) / values of lead wire version (connection N) are up to 20 % lower Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +60 Ambient temperature storage  $^{\circ}$ C -20 ... +100 Thermal resistance at f=0 R<sub>therm</sub> 29 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard Mounting any position

Electrical connection connector type D or N

Protection IP30 according to DIN EN 60529: 2014

Weight 54 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings Sintered bronze, self-lubricating


#### **Order Reference**

Туре	Step	per Motor		UCD 1 0	į	N	18	R	В
Configuration	1 2	bipolar, standard magnet unipolar, standard magnet	7 8	bipolar, stronger magnet unipolar, stronger magnet					
Rotor shaft, mounting		centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip	E K A C	centring 10 mm, shaft 2.0 mm, screw plate centring 10 mm, shaft 1.5 mm, screw plate centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip					
Approval	N	Approval Standard							
Resistance		see next pages; Resistance per winding for	bipol	ar or unipolar					
Direction	R	R reversible							
Connection	D see next pages "Connection Types" and page 145 "Connection Types" for B N								

bipolar	Configuration		UCD1		JCD7	
	Holding torque M <sub>H</sub> *	cNm	1.6		.3	
	Detent torque M <sub>S</sub>	cNm	0.15		1.3	
	Rotor inertia J <sub>R</sub>	gcm <sup>2</sup>	2.2		.4	
	Steps per revolution		48			
	Direction of rotation	V	reversible			
	Specific Technical Data Lead Wire	Versions (Connec	tion type N	)		
	Rated voltage UN	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	24	90	380	
	Winding code		18	03	04	
	Specific Technical Data Connecto	r Versions				
	Rated voltage UN	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	24	90	380	
	Winding code		07	01	02	
unipolar	Configuration		UCD2		JCD8	
	Holding torque M <sub>H</sub> *	cNm	1.4		.0	
	Detent torque M <sub>S</sub>	cNm	0.15		.3	
	Rotor inertia J <sub>R</sub>	gcm <sup>2</sup>	2,1		,4	
	Steps per revolution		48			
	Direction of rotation	V	reversible			
	Specific Technical Data Lead Wire	e Versions				
	Rated voltage UN	V	12	24	6	
	Durbu avala	%	100	100	100	
	Duty cycle	70	100	100	100	
	Resistance R <sub>20</sub>	Ω	90	380	24	
		, -				
	Resistance R <sub>20</sub>	Ω	90	380	24	
	Resistance R <sub>20</sub> Winding code	Ω	90	380	24	
	Resistance R <sub>20</sub> Winding code  Specific Technical Data Connector	Ω or Versions	90 10	380 11	24	
	Resistance R <sub>20</sub> Winding code  Specific Technical Data Connector Rated voltage UN	Ω or Versions V	90 10	380 11 24	24	
	Resistance R <sub>20</sub> Winding code  Specific Technical Data Connector Rated voltage UN Duty cycle	Ω or Versions V %	90 10 12 100	380 11 24 100	24	

 $<sup>^{\</sup>star}$  values of connector version (connection B or D) / values of lead wire version are up to 20 % lower

#### Circuit diagram bipolar




connector

			step		
		ı	II	III	IV
	1	+	+	-	-
ctor	3	-	-	+	+
connector	4	-	+	+	-
	6	+	-	-	+

counter clockwise rotation clockwise rotation


### unipolar




			step		
		l	II	III	IV
	1			-	-
	2	+	+	+	+
connector	3	-	-		
illo	4	-			-
	5	+	+	+	+
	6		-	-	
			unter el	ockwied	rotation

counter clockwise rotation clockwise rotation


Dimensions Version with Connector D

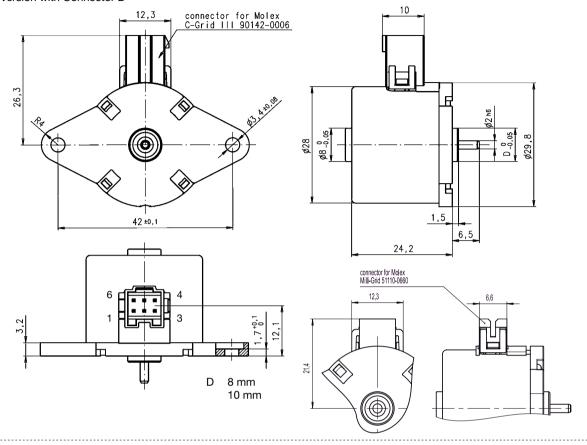



Version with Connector N (Lead wire version)

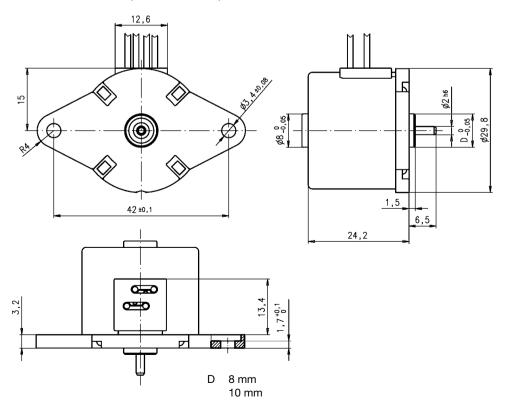


#### **Performance Chart**

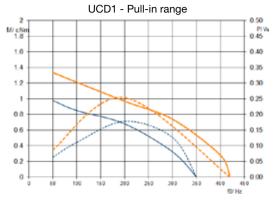

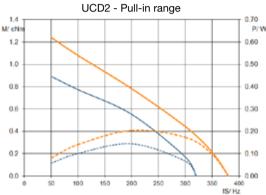


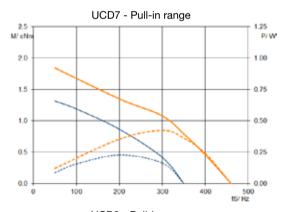


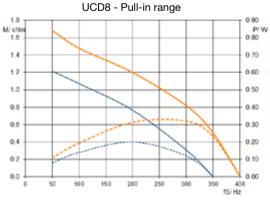



M - Duty cycle 30 %

M - Duty cycle 100%

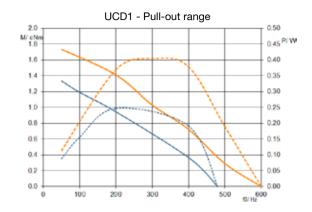

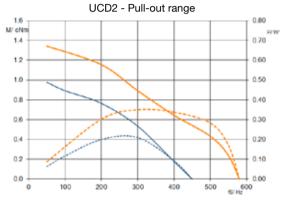

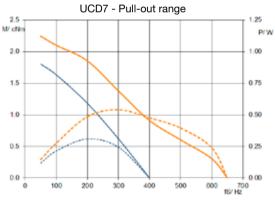

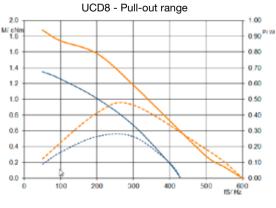

P - Duty cycle 30 %
P - Duty cycle 100 %

#### UCB1/7; UCB2/8

Dimensions (mm) Ø 28 x 24

Step angle (°) 15

Holding torque \* (cNm) 1.1–2.4

Detent torque (cNm) 0.17/0.38

Winding bipolar/unipolar

Gear combination on request



<sup>\*</sup> values for connector version (connection B or D) / values of lead wire version (connection N) are up to 20 % lower. Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +60 Ambient temperature storage  $^{\circ}$ C -20 ... +100 Thermal resistance at f=0 R<sub>therm</sub> 29 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard Mounting any position

Electrical connection connector type D or N

Protection IP30 according to DIN EN 60529: 2014

Weight 54 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings Sintered bronze, self-lubricating


#### **Order Reference**

Туре	Stepp	per Motor		UCB 1 0	N	18	R	В
Configuration	1	bipolar, standard magnet unipolar, standard magnet	7 8	bipolar, stronger magnet unipolar, stronger magnet				
Rotor shaft, mounting		centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip	E K A C	centring 10 mm, shaft 2.0 mm, screw plate centring 10 mm, shaft 1.5 mm, screw plate centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip				
Approval	N	Approval Standard						
Resistance		see next pages; Resistance per winding for	see next pages; Resistance per winding for bipolar or unipolar					
Direction	R	reversible						
Connection	D N	see next pages "Connection Types" and page	je 145	"Connection Types" for B				

bipolar	Configuration		UCB1	UC	37	
	Holding torque M <sub>H</sub> *	cNm	1.5	2.4		
	Detent torque M <sub>S</sub>	cNm	0.17	0.3	1	
	Rotor inertia J <sub>R</sub>	gcm <sup>2</sup>	2.1	2.4		
	Steps per revolution		24			
	Direction of rotation	V	reversibl	le		
	Specific Technical Data Lead	Wire Versions (Con	nection type	N)		
	Rated voltage UN	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	24	90	380	
	Winding code		18	03	04	
	Specific Technical Data Conn	ector Versions				
	Rated voltage UN	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	24	90	380	
	Winding code		07	01	02	
unipolar	Configuration		UCB2	UC	38	
	Holding torque M <sub>H</sub> *	cNm	1.1	1.8		
	Detent torque M <sub>S</sub>	cNm	0.17	0.3	1	
	Rotor inertia J <sub>R</sub>	gcm <sup>2</sup>	2.1	2.4		
	Steps per revolution		24			
	Direction of rotation	V	reversibl	le		
	Specific Technical Data Lead	Wire Versions				
	Rated voltage UN	V	12	24	6	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	90	380	24	
	Winding code		10	11	12	
	Specific Technical Data Conn	ector Versions				
	Rated voltage UN	V	12	24		
	Duty cycle	%	100	100		
	Resistance R <sub>20</sub>	Ω	90	380		
	Winding code		01	02		

 $<sup>^{\</sup>star}$  values of connector version (connection B or D) / values of lead wire version are up to 20 % lower

#### Circuit diagram bipolar



1 0 0	J	
00		N
$\overline{3}$ $\circ$ $\circ$ $\overline{4}$		

	ı	
Ш		

D		$ \begin{array}{c c}  & 1 \\ \hline 2 \\ \hline 3 \\ \hline \end{array} $	N
	_		

unipolar


			отор			
		ı	II	III	IV	
connector	1	+	+		-	
	3	-	-	+	+	
	4	-	+	+	-	
	6	+	-	-	+	

counter clockwise rotation clockwise rotation


			step					
			II	III	IV			
connector	1			-	-			
	2	+	+	+	+			
	3	-	-					
	4	-			-			
	5	+	+	+	+			
	6		•	-				
counter clockwise rotati								


clockwise rotation


Dimensions Version with Connector D

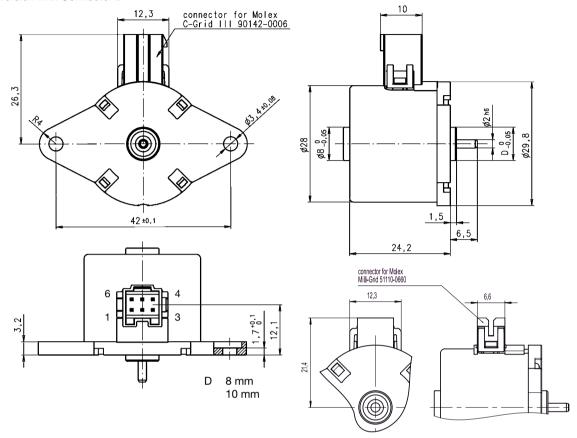


Version with Connector N (Lead wire version)

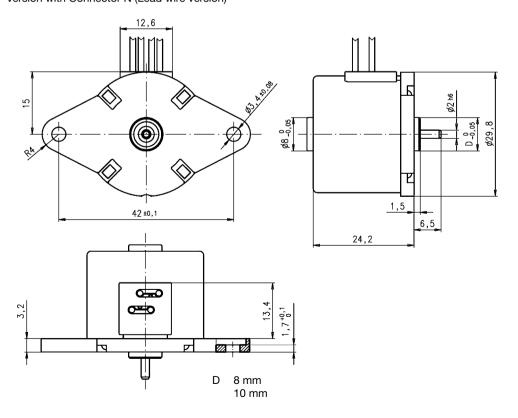


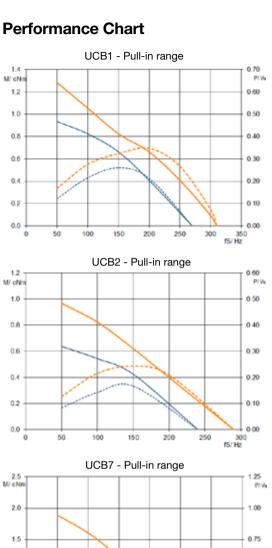


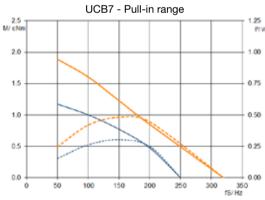


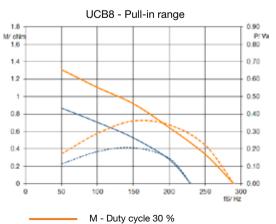


M - Duty cycle 100%

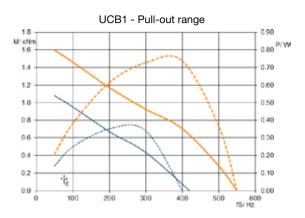

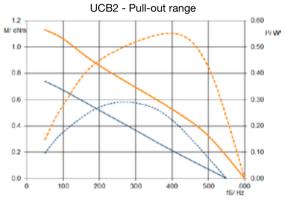

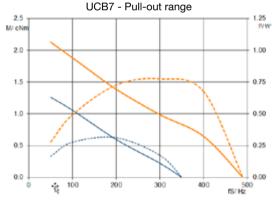

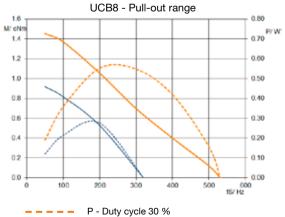

P - Duty cycle 100 %

#### UBD1/2/5/6

Dimensions (mm) Ø 36 x 21

Step angle (°) 7.5

Holding torque (cNm) 1.1–1.6

Detent torque (cNm) 0.19/0.23

Winding bipolar/unipolar

Gear combination D, M, B, F, V



Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation °C -15...+55

Ambient temperature storage °C -20...+100

Thermal resistance at f=0 Rtherm 27 K/W

Thermal class 105 (A) according to DIN EN 60085: 2008

Approval standard (UL/CSA on request)

Mounting any position Electrical connection cable

Protection IP40 according to DIN EN 60529: 2014

Weight 60 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating


Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Step	pper Motor	UBD   1   0   N   03   R   E	į							
Configuration	1 2	bipolar, standard magnet unipolar, standard magnet	5 6	bipolar, stronger magnet unipolar, stronger magnet							
Rotor shaft, mounting		centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate	A C E K	centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip centring 10 mm, shaft 2.0 mm, screw plate centring 10 mm, shaft 1.5 mm, screw plate							
Approval	N	Approval Standard									
Resistance		See next page Resistance per winding for bipolar or unipolar.									
Direction		reversible									
Cable	E	cable 150 mm (other on request)									


bipolar	Holding torque M <sub>H</sub> Detent torque Ms Rotor inertia J <sub>R</sub>	cNm cNm gcm2	UBD1 1.5 0.19 2.8		UBD5 1.6 0.23 2.9			
UBD1/5	Rated voltage U <sub>N</sub> Duty cycle Resistance R <sub>20</sub> Winding code	V % Ω	2.6 6 100 18.5 03	12 100 100 05	24 100 460 06	6 100 27.5 01	12 100 133 04	24 100 535 07
unipolar	Holding torque M <sub>H</sub> Detent torque Ms Rotor inertia J <sub>R</sub>	cNm cNm gcm2	UBD2 1.1 0.19 2.8		UBD6 1.35 0.23 2.9			<u></u>
UBD2/6	Rated voltage U <sub>N</sub> Duty cycle Resistance R <sub>20</sub> Winding code	V % Ω	6 100 28 07	12 100 120 08	24 100 500 09	6 100 41 01	12 100 172 02	24 100 700 03
UBD3/7	Rated voltage U <sub>N</sub> Duty cycle Resistance R <sub>20</sub> Winding code	V % Ω	6 100 18.5 03	12 100 100 05	24 100 460 06			
UBD4/8	Rated voltage U <sub>N</sub> Duty cycle Resistance R <sub>20</sub> Winding code	V % Ω	6 100 28 07	12 100 120 08	24 100 500 09			
	Steps per revolution Winding temperature T <sub>max</sub> Direction of rotation	°C	48 105 reversibl	le				



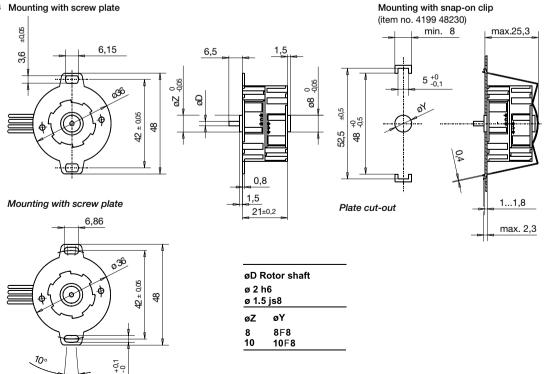

3,2

#### **Performance Chart**

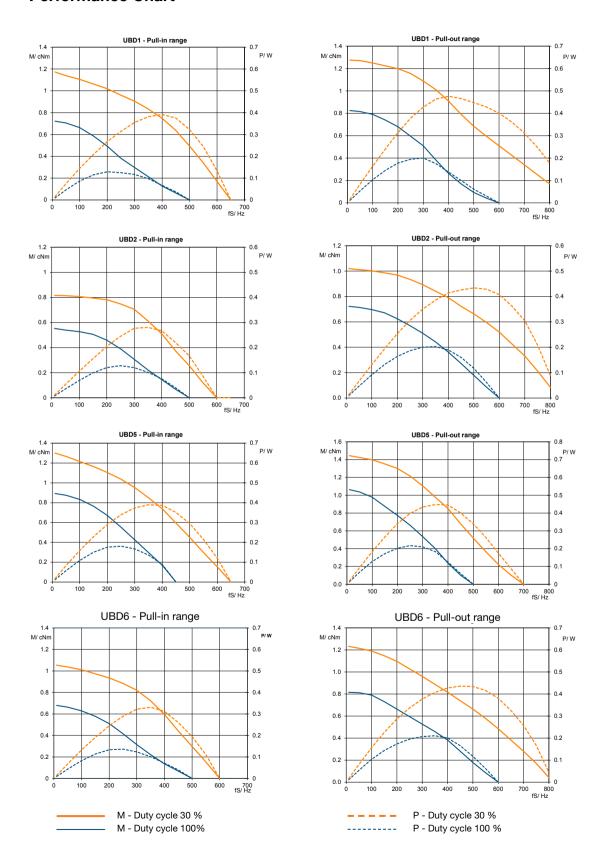

#### UBB1/2/5/6

Dimensions (mm) Ø 36 x 21


Step angle (°) 15

Holding torque (cNm) 0.85–1.6

Detent torque (cNm) 0.21/0.31

Winding bipolar/unipolar

Gear combination D, M, B, F, V



Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Thermal class 105 (A) according to DIN EN 60085 : 2008

Approval standard (UL/CSA on request)

Mounting any position Electrical connection cable

Protection IP40 according to DIN EN 60529: 2014

Weight 60 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating


Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Step	per Motor	UBB i 1 i 0 i N	03	R	E	
Configuration	1 2	bipolar, standard magnet unipolar, standard magnet	5 6	bipolar, stronger magnet unipolar, stronger magnet	 		
Rotor shaft, mounting		centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate	A C E K	centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip centring 10 mm, shaft 2.0 mm, screw plate centring 10 mm, shaft 1.5 mm, screw plate			
Approval	N	Approval Standard					
Resistance		See next page Resistance per winding for	bipola	r or unipolar.	•		
Direction		reversible					
Cable	E	cable 150 mm (other on request)					


bipola	,		UBB1	UBB5		 
			ODDI	UDDS		
	Holding torque MH	cNm	1.3	1.6		
	Detent torque Ms	cNm	0.21	0.31		
	Rotor inertia JR	gcm <sup>2</sup>	2.8	2.9		
UBB1/5	Rated voltage U <sub>N</sub>	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	18.5	100	460	
	Winding code		03	05	06	
unipola			UBB2	UBB6		 
umpoiu	Holding torque Мн	cNm	0.85	1.2		
	Detent torque Ms	cNm	0.21	0.31		
	Rotor inertia J <sub>R</sub>	gcm <sup>2</sup>	2.8	2.9		
UBB2/6		V	6	12	24	
UDD2/0	Duty cycle	<b>v</b> %	100	100	100	
	Resistance R <sub>20</sub>	%	28	120	500	
	Winding code	75	26 07	08	09	
UBB3/7	•	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	18.5	100	460	
	Winding code		03	05		 
UBB4/8	Rated voltage U <sub>N</sub>	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	28	120	500	
	Winding code		07	08	09	
	Steps per revolution		24			 
	Winding temperature T <sub>max</sub>	°C	105			
	Direction of rotation		reversit	ole		

#### Dimensions Mounting with screw plate

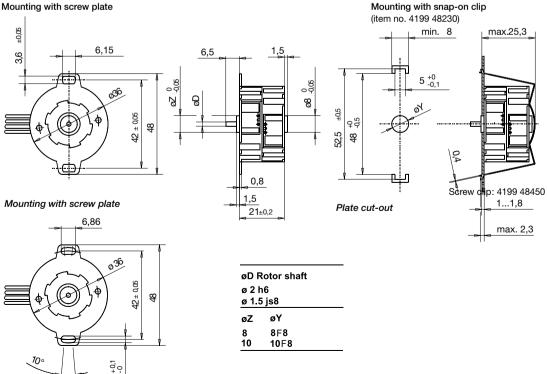

3,2

#### **Performance Chart**

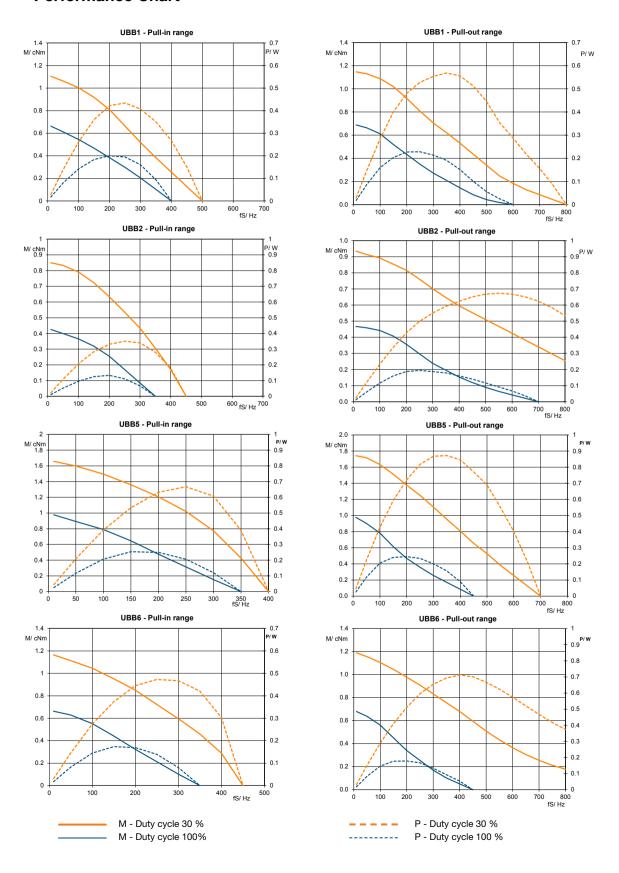

#### **UDB1/2**



Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### **Standard Data**

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Thermal class 105 (A) according to DIN EN 60085 : 2008

Approval standard

Mounting any position

Electrical connection cable

Protection UDB1: IP30, UDB2: IP40 according to DIN EN 60529: 2014

Weight 132 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating

Electric strength according to DIN EN 60034-1/DIN EN 60335-1


#### **Order Reference**


Type	Step	pper Motor	UDB	1	; 0	N	02	R	N	:
Configuration	1 2	bipolar unipolar					 			
Rotor shaft, mounting	-	centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 2.0 mm, clip							1	
Approval	N	Approval Standard					1	-		ŀ
Resistance		See next page Resistance per winding for bipolar or unipolar.						į		i
Direction		reversible								-
Cable	N 	cable 150 mm (other on request)								-


# **Technical Data**


bipolar (UDB1)	Holding torque M <sub>H</sub>	cNm	2.3		
	Detent torque Ms	cNm	0.3		
	Rotor inertia J <sub>R</sub>	gcm2	6.3		
	Rated voltage U <sub>N</sub>	V	6	12	24
	Duty cycle	%	100	100	100
	Resistance R <sub>20</sub>	Ω	15	78	350
	Winding code		01	02	03
unipolar (UDB2)	Holding torque M <sub>H</sub>	cNm	1.8		
	Detent torque Ms	cNm	0.3		
	Rotor inertia J <sub>R</sub>	gcm2	6.3		
	Rated voltage U <sub>N</sub>	V	6	12	24
	Duty cycle	%	100	100	100
	Resistance R <sub>20</sub>	Ω	19	75	300
	Winding code		01	02	04
	Steps per revolution		24		
	Winding temperature T <sub>max</sub>	°C	105		
	Direction of rotation		reversibl	е	

Dimensions

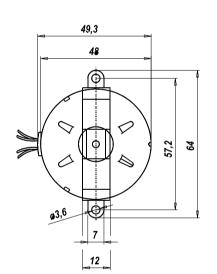






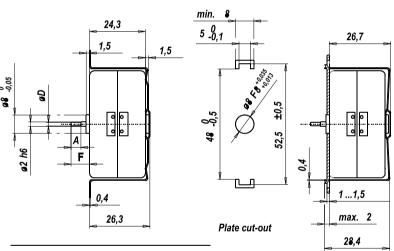


øD Rotor shaft	Dimension A	Dimension F			
1,5js8 +0,007 -0,007	4,3	6,5			
2h6 <sub>-0,006</sub>	_	8,2			

# **Performance Chart**

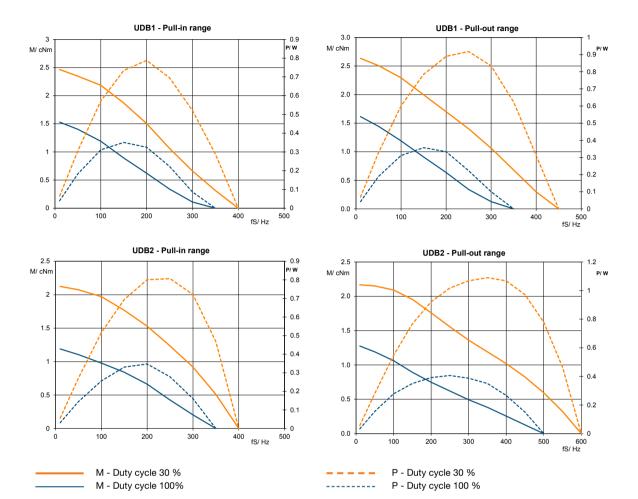

#### **UFD1/2**

Dimensions (mm) Ø 52 x 28 Step angle (°) 7.5 Holding torque 5.4/3.9 (cNm) Detent torque 0.38 (cNm) Winding bipolar/unipolar Gear combination D, M, B, F, V, J, O, P



Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

°C -15...+55 Ambient temperature operation Ambient temperature storage °C -20...+100 Thermal resistance at f=0 R<sub>therm</sub> 13 K/W

Thermal class 105 (A) according to DIN EN 60085 : 2008 (130 / B on request)

Approval standard (UL/CSA on request)

Mounting any position

lead wires AWG22, insulation Ø 1.72 ± 0.08 mm Electrical connection Protection IP40 according to DIN EN 60529: 2014

Weight

Rotor stalling motor can be stopped when voltage is applied, without being overheated

**Bearings** sintered bronze, self-lubricating

Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**


Туре	Step	pper Motor	UFD 1 0 N 02	2   R	N	į	
Configuration	1 2	bipolar, two coils unipolar, two coils					
Rotor shaft, mounting		centring 8 mm, shaft 3.0 mm, clip centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 3.0 mm, screw plate centring 8 mm, shaft 2.0 mm, screw plate centring 8 mm, shaft 1.5 mm, screw plate	E K M B A C	centring 10 mm, shaft 3.0 mm, screw plate centring 10 mm, shaft 2.0 mm, screw plate centring 10 mm, shaft 1.5 mm, screw plate centring 10 mm, shaft 3.0 mm, clip centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip			
Approval	N	Approval Standard			1		-
Resistance	See next page Resistance per winding for bipolar or unipolar.						
Direction		reversible				İ	į
Cable		E cable 150 mm (other on request)					

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes


# **Technical Data**


bipolar (UFD1)	Holding torque M <sub>H</sub>	cNm	5.4		
	Detent torque Ms	cNm	0.38		
	Rotor inertia JR	gcm2	14.4		
	Rated voltage U <sub>N</sub>	V	6	12	24
	Duty cycle	%	100	100	100
	Resistance R <sub>20</sub>	Ω	9.5	52	250
	Winding code		01	02	03
unipolar (UFD2)	Holding torque M <sub>H</sub>	cNm	3.9		
	Detent torque Ms	cNm	0.38		
	Rotor inertia J <sub>R</sub>	gcm2	14.4		
	Rated voltage U <sub>N</sub>	V	6	12	24
	Duty cycle	%	100	100	100
	Resistance R <sub>20</sub>	Ω	15	61	251
	Winding code		01	02	03
	Steps per revolution		48		
	Winding temperature Tmax	(	°C	105	
	Direction of rotation		reversi	ble	
	Rotor shaft		3, ∅ D	= 3h6, D	im. A = "-"

Dimensions

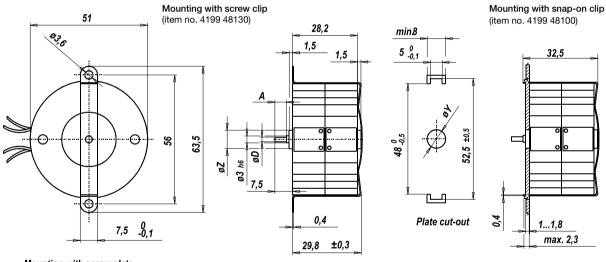

# Mounting with screw plate








øRotor- shaft	øD	Dim. A			
1,5	1,5js8	5			
2	2js8	5			
3	3h6	-			
Туре	øΖ	øΥ			
,,,,,	~-				
UFD	8 -0,05	8 <b>F</b> 8			

# Rotational


# **Performance Chart**

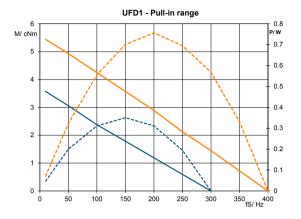


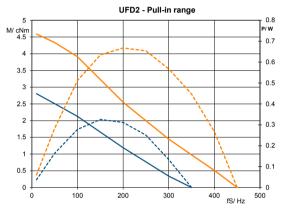


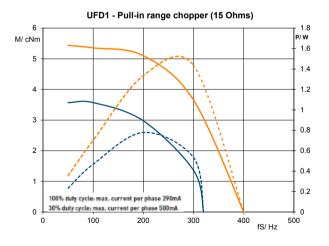



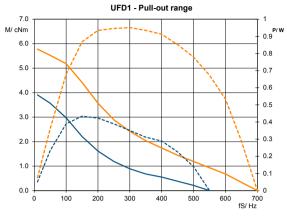

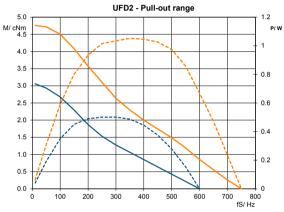

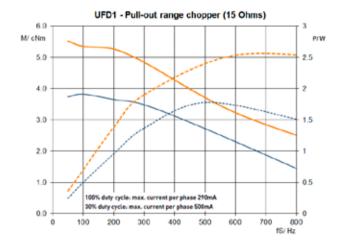

# UFB1/2/5; UFB3/4

 Dimensions (mm)
 Ø 52 x 28 / Ø 52 x 56

 Step angle (°)
 15

 Holding torque (cNm)
 3.7−4.7 (UFB1/2); 7.0 (UFB5); 6.5−8.8 (UFB3/4)

 Detent torque (cNm)
 0.4 (UFB1/2); 0.68 (UFB5); 0.68 (UFB3/4)

 Winding
 bipolar/unipolar

 Gear combination
 D, M, B, F, V, J, O, P



Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1 : 2015

Ambient temperature operation °C -15...+55

Ambient temperature storage °C -20...+100

Thermal resistance at f=0 R<sub>therm</sub> 11 K/W (UFB1/2/5), 7 K/W (UFB3/4)

Thermal class 105 (A) according to DIN EN 60085 : 2008 [130 (B) on request]

Approval standard (UL/CSA on request)

Mounting any position

Electrical connection lead wires AWG22, insulation  $\emptyset$  1.75  $\pm$  0.08 mm Protection IP40 according to DIN EN 60529 : 2014 Weight 180 g (UFB1/2/5), 350 g (UFB3/4)

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings sintered bronze, self-lubricating

Electric strength according to DIN EN 60034-1/DIN EN 60335-1

#### **Order Reference**

Туре	Step	pper Motor		UFB
Configuration	1 2 5	bipolar, two coils, standard magnet unipolar, two coils, standard magnet bipolar, two coils, stronger magnet	3 4	bipolar, four coils, standard magnet unipolar, four coils, standard magnet
Rotor shaft, mounting	0 1 2 3 4 5	centring 8 mm, shaft 3.0 mm, clip centring 8 mm, shaft 2.0 mm, clip centring 8 mm, shaft 1.5 mm, clip centring 8 mm, shaft 3.0 mm, screw plate * centring 8 mm, shaft 2.0 mm, screw plate * centring 8 mm, shaft 1.5 mm, screw plate *	E K M B A C	centring 10 mm, shaft 3.0 mm, screw plate * centring 10 mm, shaft 2.0 mm, screw plate * centring 10 mm, shaft 1.5 mm, screw plate * centring 10 mm, shaft 3.0 mm, clip centring 10 mm, shaft 2.0 mm, clip centring 10 mm, shaft 1.5 mm, clip
Approval	N	Approval Standard		
Winding code		see next page		
Direction		reversible		
Cable	N	cable 150 mm (other on request)		
	* sc	rew plate not for UFB3 and UFB4		


All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes


# **Technical Data**

bipolar			UFB1	UFB		UFB5	
	Holding torque M <sub>H</sub>	cNm	4.7	8.8		7.0	
	Detent torque Ms	cNm	0.4	0.68		0.68	
	Rotor inertia J <sub>R</sub>	gcm <sup>2</sup>	14.2	24.2	<u>2</u>	17.8	 
UFB1/5	Rated voltage U <sub>N</sub>	V	6	12	24		
	Duty cycle	%	100	100	100		
	Resistance R <sub>20</sub>	Ω	9.5	52	250		
	Winding code		01	02	04		
UFB3	Rated voltage U <sub>N</sub>	V	6	12	24		
	Duty cycle	%	100	100	100		
	Resistance R <sub>20</sub>	Ω	5	25.5	125		
	Winding code		01	02	04		
unipolar			UFB2	UFB	4		 -
	Holding torque M <sub>H</sub>	cNm	3.7	6.5			
	Detent torque Ms	cNm	0.4	0.68	3		
	Rotor inertia J <sub>R</sub>	gcm²	14.2	24.2	2		
UFB2	Rated voltage U <sub>N</sub>	V	6	12	24		 
	Duty cycle	%	100	100	100		
	Resistance R <sub>20</sub>	Ω	15	61	251		
	Winding code		01	02	03		
UFB4	Rated voltage U <sub>N</sub>	V	6	12	24		 
	Duty cycle	%	100	100	100		
	Resistance R <sub>20</sub>	Ω	7.5	30.5	125		
	Winding code		01	02	03		
	Steps per revolution	24					 
	Winding temperature T <sub>max</sub>	105° C					
	Direction of rotation	reversible					


# **Dimensions**




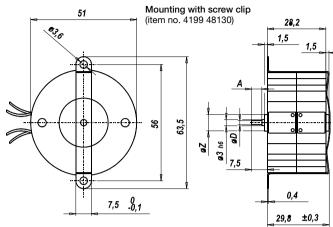




Mounting with screw plate






øRotor- shaft	øD	Dim. A
1,5	1,5js <b>8</b>	5
2	2js8	5
3	3h6	-
	øZ	øY
	8 <sub>-0,05</sub>	8F8
	<b>10</b> -0,05	10F8




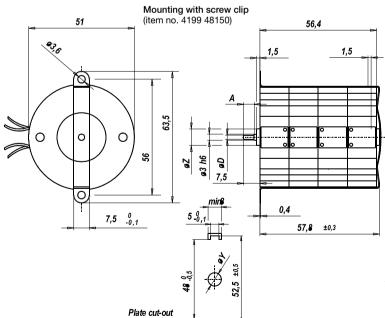






shaft	טפּ	DIM. A	
2	2 js8	5	
3	3 h6	-	
		øΖ	øΥ
		<b>8</b> -0.05	8F8
		10 .0.05	10F8


# **Performance Chart**

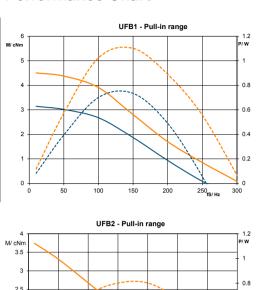


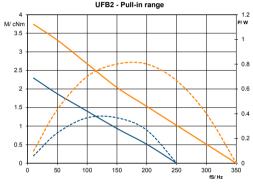


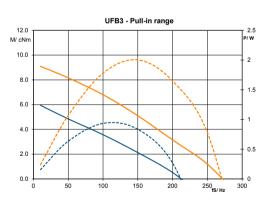


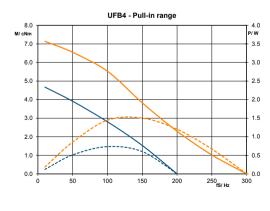




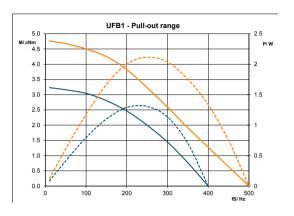

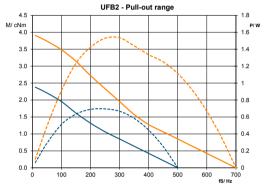


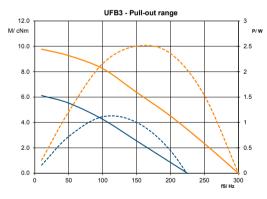

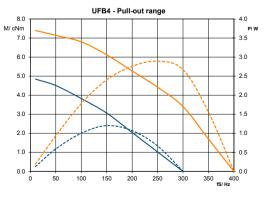



P - Duty cycle 30 %
------ P - Duty cycle 100 %

# **Performance Chart**

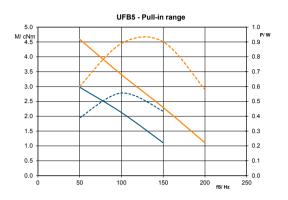



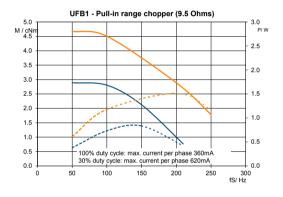

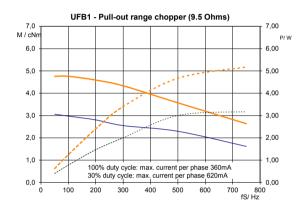

M - Duty cycle 30 %
M - Duty cycle 100%

----- P - Duty cycle 30 % ----- P - Duty cycle 100 %

#### **UPJ**

Dimensions (mm) Ø 64 x 43

Step angle (°) 11.25

Holding torque (cNm) 30 (UPJ1); 45 (UPJ5)

Detent torque (cNm) 2 (UPJ1); 7 (UPJ5)

Winding bipolar

Gear combination O, P, R



Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

#### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +40 Ambient temperature storage  $^{\circ}$ C -20 ... +100 Thermal resistance at f=0 R<sub>therm</sub> 29 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard Mounting any position

Electrical connection lead wires AWG22, insulation Ø 1.6  $\pm$  0.1 mm Protection IP30 according to DIN EN 60529 : 2014

Weight 500 g (UPJ1); 550 g (UPJ5)

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings Sintered bronze, self-lubricating

## **Order Reference**

Type	Step	pper Motor	UPJ	1	1	N	01	R	E	i
Configuration	1 5	standard magnet stronger magnet					! ! ! !	! ! ! !	! ! ! !	-
Rotor shaft, mounting	1 2 A C	centring 10 mm, shaft length 8,1 mm, screw plate centring 10 mm, shaft length 15,5 mm, screw plate centring 14 mm, shaft length 8,1 mm, screw plate centring 14 mm, shaft length 15,5 mm, screw plate					 	 	 	
Approval	N	standard					! ! !	 	! ! ! !	i
Winding code		see next page							! ! !	1
Direction	R	reversible							! ! !	
Cable	Ε	150 mm (other upon request)								1111

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes


# **Technical Data**

bipolar (UPJ1)	Step angle	0	11.25
	Holding torque MH	cNm	30
	Detent torque Ms	cNm	2
	Rotor inertia JR	gcm2	85
	Steps per revolution		32
	Winding temperature increase	K	90
	Current per winding	Α	1.25
	Inductance per winding	mH	9.5
	Power consumption	W	11.5
	Driver mode		Chopper drive
bipolar (UPJ5)	Step angle	0	11.25
	Holding torque MH	cNm	45
	Detent torque Ms	cNm	7
	Rotor inertia JR	gcm2	180
	Steps per revolution		32
	Winding temperature increase	K	90
	Current per winding	Α	1.25
	Inductance per winding	mH	8
	Power consumption	W	11.5
	Driver mode		Chopper drive
	Rated voltage U <sub>N</sub>	V	4.5
	Duty cycle	%	100
	Resistance R <sub>20</sub>	Ω	3.7
	Winding code		01


Circuit diagram Motor connections - bipolar


lead wire		ste	ер	
color	ı	П	III	IV
red	+	+	-	-
blue	-	-	+	+
black	-	+	+	-
brown	+	-	-	+






Dimensions mounting dimensions UP with screw plate

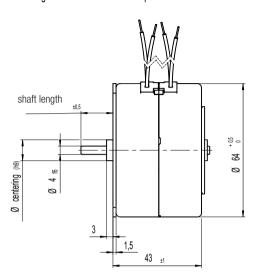

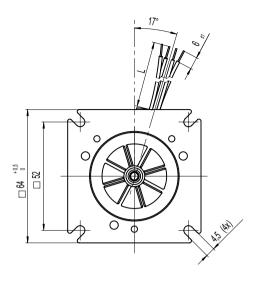

# Gearboxes for Motors



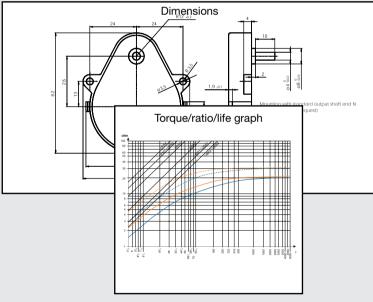



# **Planetary Gearbox UGY**

Dimensions (mm) Ø 20\* x 12,7 ... 27,7

Max. torque (cNm) 30 (higher torque on request)

Ratios 4,4 ... 370 (3,8 ... 850 on request)

Standard shaft Ø 4 with flat (others on request)

Motor combination Stepper/Synchronous motor UA; DC motor NF213G Other motors on requests

\* at connection ribs larger



#### **Standard Data**

Mounting any position

Axial thrust FA 5 N

Lateral force FR 10 N (higher force on request)

Climatic class wide spread according to DIN IEC 60721-2-1

Ambient temperature operation  $^{\circ}$ C  $^{-10}$  ... +55 Ambient temperature storage  $^{\circ}$ C  $^{-20}$  ... +80

Weight 50 ...70 g (with DC motor NF213G)

Bearing sintered bronze, self-lubricating

(ball bearing on request)

#### **Order Reference**

Example motor combination: with DC motor NF

Motor type	JP	DC Motor (brushed)	JP	į	2	C	;	N	;	M4	Y	04A	; N	;	E	N	;
Motor size	2	diameter 24.2 mm					- {				:	!		-			
Motor version	С	24 V; no-load speed 5900 rpm									! !	-	-	-			
Approval	N	standard							- 1		! ! !	1	-				
Voltage	M4	24 Vdc									! !	1	į	į			
Gearbox size	Υ	planetary gearbox diameter 20 mm											1	-			
Gear ratio	04A	4,4 (1 stage)												į			
Connection	N A	standard special															1
Bearing/ Gear material	E	sintered bearing / plastics gear wheels		- <del></del>													!
Shaft end	N	standard shaft $\varnothing$ 4 with flat															

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

# **Technical Data**


Technical data of bare gearbox. Data of complete gearmotors on request


Stages	1	2	3	4
Ratios *	4,4	19,2	85	370
Max.torque **	10	20	30	30
Short peak torque **	15	30	45	45
Gear efficiency **	0,85	0,75	0,65	0,55


- \* Approximate values, precise values on request.
  Other ratios between 3,8 ...850 on request.
- \*\* Approximate values, must be tested under specific operating conditions in application. Higher values on request.

Dimensions

Example motor combination: with DC motor NF213G; standard shaft



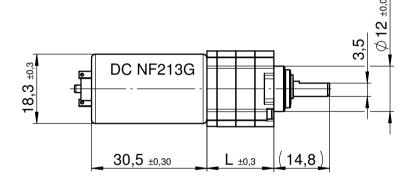

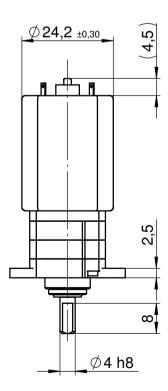

length L	no. of stages
12,7	1
17,7	2
22,7	3
27,7	4

# UGD

# **UGD**

Dimensions (mm)	
Height (mm)	13
Max. torque (cNm)	
Ratios	4 1/6 6.048.000
Internal slipping clutch	optional for ratios ≥ 33⅓
Standard shaft (mm)	Ø 4 x 10
Weight (g)	
Motor combination	Series UC, UB and UD; Series UF without UFR3/4 and UFB3/4



# **Standard Data**

Mounting any position Axial thrust FA 10 N Lateral force FR 50 N Slipping clutches/free wheel single-way clockwise/counter clockwise function and two way Slipping-/free wheel torque 1 ... 40 cNm Output shafts  $\emptyset$  4 x 10, other on request wide-spread according to DIN IEC 60721-2-1 Climatic class Ambient temperature operation °C -15 ... +55 °C -40 ... +80 Ambient temperature storage

Ratios	4 1/6	5	8 1/3	10	12 1/2	15	16 <sup>2</sup> /3	20 5/6	25	30	33 1/3	40	41 2/3
	45	50	60	62 1/2	83 1/3	100	120	125	150	166 ²/3	200	250	300
	375	500	600	625	750	900	1000	1200	1500	1800	2000	2400	2500
	3000	3600	3750	4500	5000	6000	7500	9000	10000	15000	18000	21600	22500
	30000	36000	45000	54000	60000	72000	90000	108000	112500	120000	180000	216000	225000
	270000	300000	360000	432000	450000	720000	864000	1800000	5040000	6048000			


# **Order Reference**


Туре	Gear	box	UGD	; 100	; N	N ¦5cNm	N	- 1
Ratio		100				į		
Slipping clutch		Without slipping clutch One-way slipping clutch, clockwise One-way slipping clutch, counter clockwise Two-way slipping clutch						
Slipping torque		5 cNm (for instance)						- {
Shaft end	N	Ø 4 x 10, other on request						

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

Dimensions

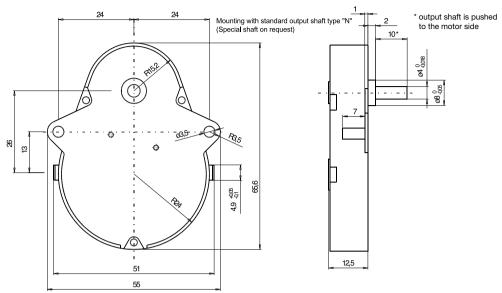

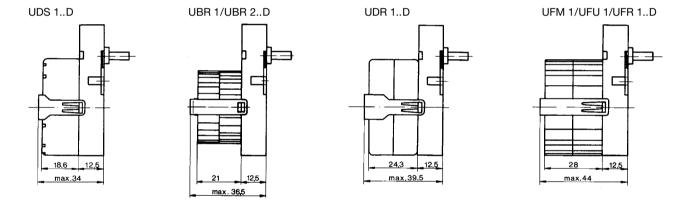




# Slipping clutches

	max. torque available at output shaft (cNm)	free wheel-/clutch torque (cNm)
Roller-type free wheel	32	1
Single-way slipping clutches	32	4 25 counter clockwise or clockwise function
Two-way slipping clutches	3 15	4 40

# Torque / ratio / life graph

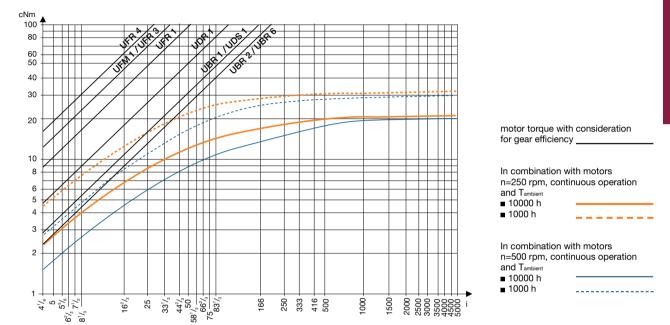

# UGM Dimensions (mm) 51 x 65.2 Height (mm) 15 Max. torque (cNm) 100 Ratios 12.5 ... 4800 Internal slipping clutch none Standard shaft (mm) Ø 4 x 10 Weight (g) 45



#### **Standard Data**

 $\begin{array}{ll} \mbox{Mounting} & \mbox{any position} \\ \mbox{Axial thrust } \mbox{F}_{\mbox{\scriptsize A}} & \mbox{20 N} \\ \mbox{Lateral force } \mbox{F}_{\mbox{\scriptsize R}} & \mbox{100 N} \end{array}$ 

Motor combination Series UC, UB and UD; Series UF without UFR3/4 and UFB3/4

Output shafts Ø 4 x 10, other on request

Climatic class wide-spread according to DIN IEC 60721-2-1

Ambient temperature operation  $^{\circ}$ C -15 ... +60 Ambient temperature storage  $^{\circ}$ C -40 ... +80

Ratios 12 1/2 16 2/3 25 50 100 120 150 200 240 300 400 450 500 600


750 1000 1200 1500 4800


# **Order Reference**

Type	Gea	rbox	UGM ; 100	; N	N ;
Ratio		100			
Slipping clutch	Ν	Without slipping clutch			
Shaft end	N	Ø 4 x 10, other on request			


All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes


Dimensions

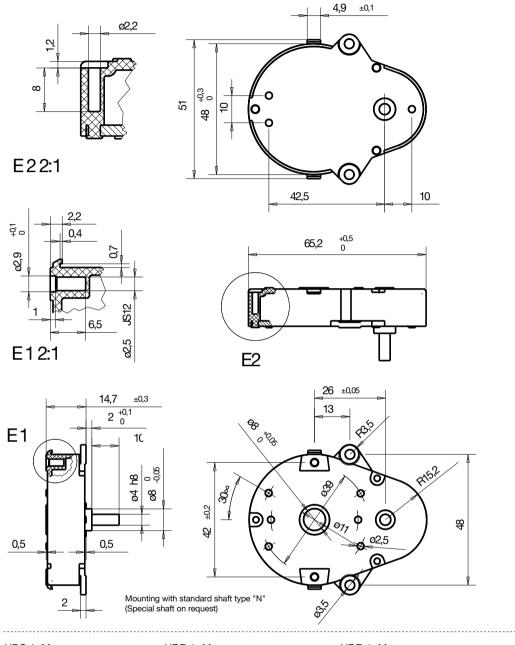

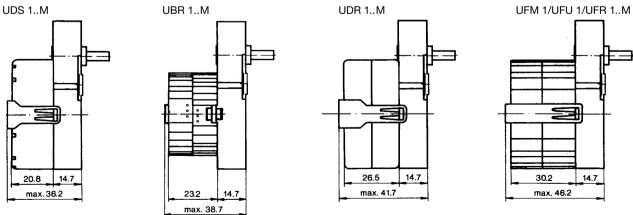


14.7

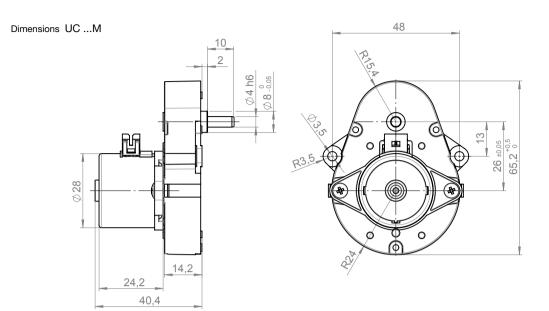

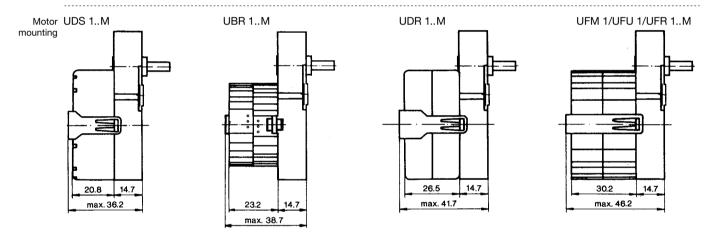

# Torque / ratio / life graph

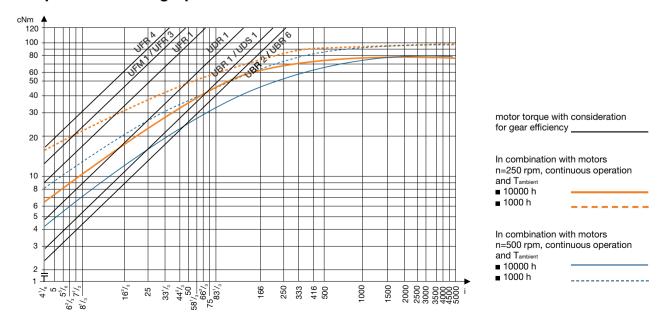

# **UGB**

#### **UGB**

Dimensions (mm) 58 x 81

Height (mm) 17

Max. torque (cNm) 250

Ratios 41²/₃ ... 345.600

Internal slipping clutch optional

Standard shaft (mm) Ø 8 x 12

Weight (g) 130

Motor combination Series UC, UB and UD; Series UF without UFR3/4 and UFB3/4



#### **Standard Data**

Mounting any position
Axial thrust F<sub>A</sub> 100 N

Lateral force F<sub>R</sub> 300 N

Slipping clutches/free wheel single-way clockwise/counter clockwise function and two way

Slipping-/free wheel torque 4 ... 175 cNm

Output shafts  $\emptyset$  8 x 12, other on request

Climatic class wide-spread according to DIN IEC 60721-2-1

Ratios	41 2/3	83 1/3	100	125	150	166 <sup>2</sup> / <sub>3</sub>	200	250	300	500	600	750	900
	1000	1200	1500	1800	2000	2500	3000	3750	5000	6000	7500	12000	15000
	18000	30000	36000	60000	120000	266666 2/3	288000	320000	345600				


## **Order Reference**


Туре	Gearl	box	UGB	; 10	00 ;	Ν	5cNm;	N	i
Ratio		100							į
Slipping clutch		Without slipping clutch One-way slipping clutch, clockwise One-way slipping clutch, counter clockwise Two-way slipping clutch							
Slipping torque		5 cNm							-
Shaft end	N	$\varnothing$ 8 x 12, other on request							


All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

Dimensions

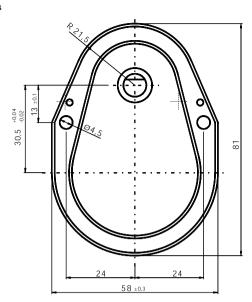

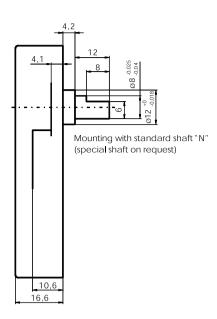


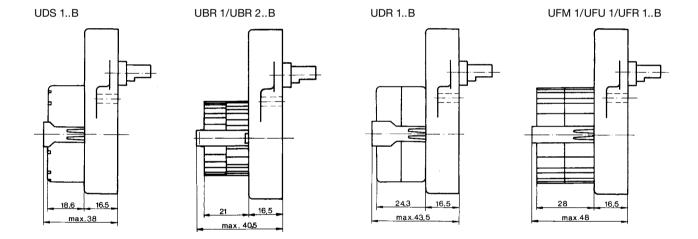

# Slipping clutches

	max. torque available at output shaft (cNm)	free wheel-/clutch torque (cNm)
Roller-type free wheel		
Single-way slipping clutches	150	4 50 counter clockwise or clockwise direction possible
Two-way slipping clutches	40 70	60 175

# Torque / ratio / life graph

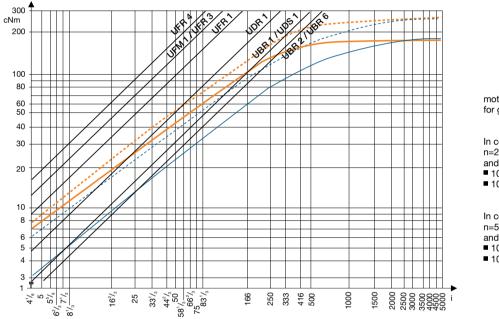

motor torque with consideration for gear efficiency.

In combination with motors n=250 rpm, continuous operation and T<sub>ambient</sub>
■ 10000 h

- 1000 h

In combination with motors n=500 rpm, continuous operation and Tambient

- 10000 h
- 1000 h

#### **UGF**

58 x 81 Dimensions (mm) Height (mm) 17 Max. torque 500 (cNm) 4<sup>1</sup>/<sub>6</sub> ... 5000 Ratios Internal slipping clutch Standard shaft (mm) Ø 8 x 12 130 Weight (g) Series UC, UB, UD, UF Motor combination



#### **Standard Data**


Mounting any position Axial thrust FA 100 N Lateral force FR 400 N Slipping clutches/free wheel none Slipping-/free wheel torque cNm Output shafts  $\emptyset$  8 x 12, other on request Climatic class wide-spread according to DIN IEC 60721-2-1 °C -15 ... +55 Ambient temperature operation °C -40 ... +80 Ambient temperature storage Ratios 4 1/6 8 1/3 16 <sup>2</sup>/<sub>3</sub> 20 5/6 25 30 41 2/3 50 62 1/2 83 1/3 100 125 166 2/3 250 500 600 750 1000 4000 5000 333 1/3 1200 1500


# **Order Reference**


Туре	Gearl	box	UGF	; 100	; N	; 1	N ;
Ratio		100					
Slipping clutch	N	Without slipping clutch					
Shaft end	N	$\emptyset$ 8 x 12, other on request					


All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

#### Dimensions

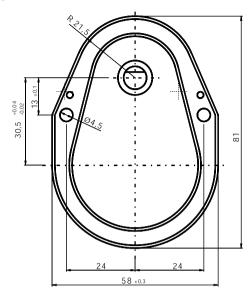


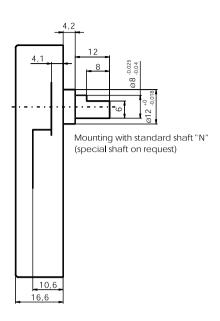

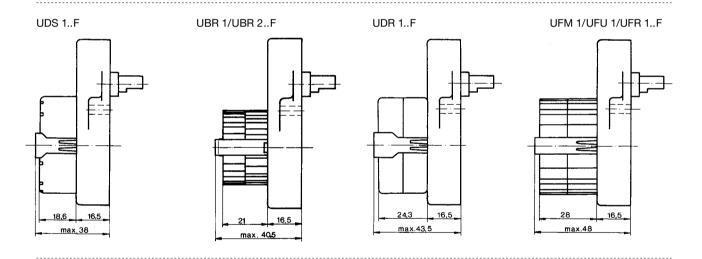

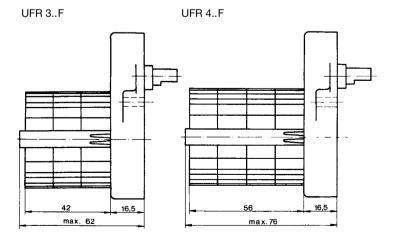

# Torque / ratio / life graph

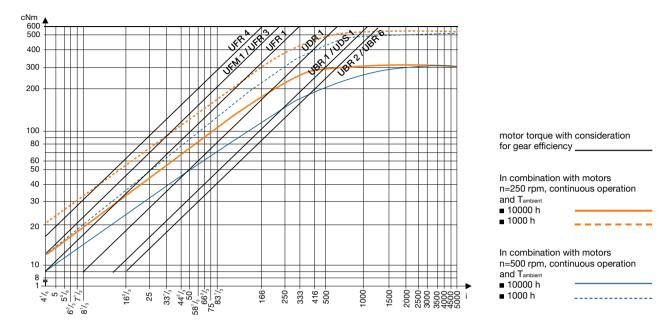



#### UGV

 Dimensions (mm)
 70 x 70

 Height (mm)
 17

 Max. torque (cNm)
 500

 Ratios
 8¹/₃ ... 2000

 Internal slipping clutch (mm)
 none

 Standard shaft (mm)
 Ø 8 x 12

 Weight (g)
 130

 Motor combination
 Series UB, UD, UF



#### **Standard Data**

 $\begin{tabular}{lll} Mounting & any position \\ Axial thrust $F_A$ & 100 N \\ Lateral force $F_R$ & 400 N \\ \end{tabular}$ 

Output shafts Ø 8 x 12, other on request


Climatic class wide-spread according to DIN IEC 60721-2-1

Ambient temperature operation  $^{\circ}$ C -15 ... +55 Ambient temperature storage  $^{\circ}$ C -40 ... +80

Ratios 8 1/s 16 2/s 25 41 2/s 83 1/s 100 125 250 500 2000


# **Order Reference**

Type	Gearbox				N ;	N	i
Ratio		100					i
Slipping clutch	N	Without slipping clutch					1
Shaft end	N	Ø 8 x 12, other on request					į
							-

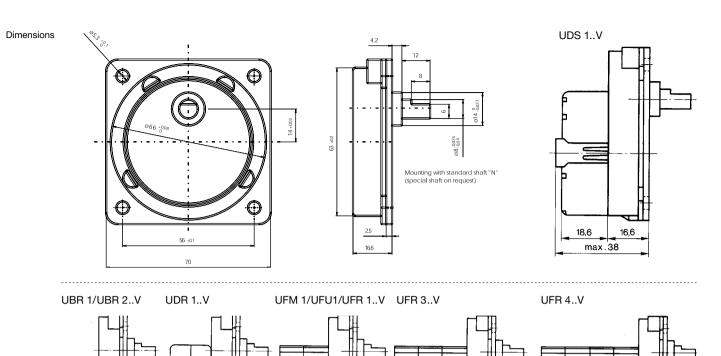

# Torque / ratio / life graph

24,3

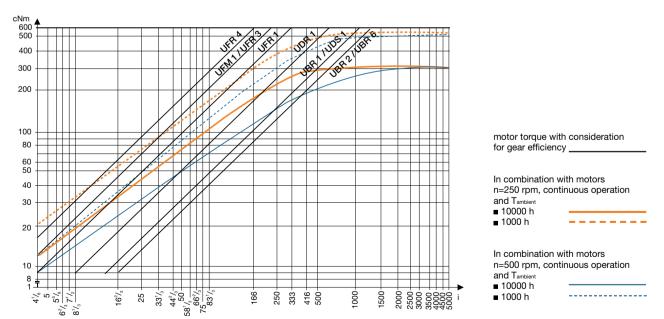

max.62

# **UGO/UGP**

# **UGO/UGP (STG60/61)**

Dimensions (mm)	65 x 65/68 x 68	0
Height (mm)	29.8–38	19
Max. torque (cNm)	600	
Ratios	6 1/4 3750	000
Internal slipping clutch	none	UGO (STG 60)
Standard shaft (mm)	Ø 8 x 22	040 (014 00)
Weight (g)	230–330	
Motor combination	series UF and UP	



JGO (STG 60) UGP (STG 61)

# **Standard Data**

any position	
3000 min <sup>-1</sup>	
600 cNm	
please refer to table in	Technical Data
unloaded	1.5 degree
2-4 stages with 6 Nm	3 degree
5-6 stages with 6 Nm	4 degree
30 N	
80 N	
0.3 mm	
20 μm	
−15 +60°C	
–40 +100 °C	
	3000 min <sup>-1</sup> 600 cNm please refer to table in unloaded 2–4 stages with 6 Nm 5–6 stages with 6 Nm 30 N 80 N 0.3 mm 20 µm –15 +60°C

Ratio 6 1/4 12 <sup>1</sup>/<sub>2</sub> 18 3/4 37 1/2 46 7/8 31 1/4 50 62 1/2 75 93 3/4 125 150 187 1/2 250 375 750 1500 2000 3750

# **Order Reference**

Туре	Gearbox			STG60 UGO	6 <sup>1</sup> / <sub>4</sub> M		N			
Ratio	6 1/4									
Mounting layouts (fixing)		UGO UGP M4 M4 M4	through holes threads on gearbox flange side threads on motor side threads on both sides							
			shaft end N Ø 8 x 25, other upon request							
	motor pinion: see next pages Motor Pinion Data									

optional adaptor plate: see next pages for adaptor plate

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

<sup>\*</sup> Depends on ratio, see next page

# **Technical Data**

Ratio	Stages *	Efficiency	Pinion type	Weight	Max. torque (Nm)	Max. input speed (rpm)
6 1/4	2	0.77	1	190	1.0	750
12 1/2	3	0.68	2	220	1.8	1500
18 3/4	3	0.68	3	220	2.7	2250
25	3	0.68	3	220	3.6	3000
31 1/4	3	0.68	4	220	4.5	3000
37 1/2	3	0.68	4	220	5.4	3000
46 <sup>7</sup> / <sub>8</sub>	4	0.60	3	250	6	3000
50	4	0.60	2	250	6	3000
62 1/2	4	0.60	2	250	6	3000
75	4	0.60	3	250	6	3000
93 3/4	4	0.60	3	250	6	3000
125	4	0.60	2	250	6	3000
150	4	0.60	3	250	6	3000
187 1/2	4	0.60	4	250	6	3000
250	5	0.53	2	280	6	3000
375	5	0.53	3	280	6	3000
750	5	0.53	4	280	6	3000
1500	6	0.46	4	310	6	3000
2000	6	0.46	4	310	6	3000
3750	6	0.46	4	310	6	3000

Additionally to the input speed limit: max. 120 rpm output speed


Technical Data valid for an ambient temperature operation: -15...+60°C

2.4 and 6 stages - same 3 and 5 stages - opposite


<sup>\*</sup> Direction of rotation of output- and motor-shaft at

# **UGO/UGP**

#### Dimensions UGO

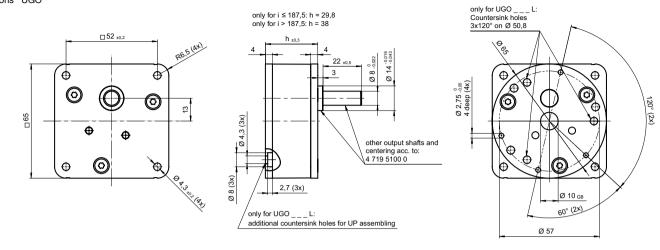

not dimensioned holes suitable for adaptor plate AP60 (accessories) holes ¢2,75 are intended for thread forming screws M3

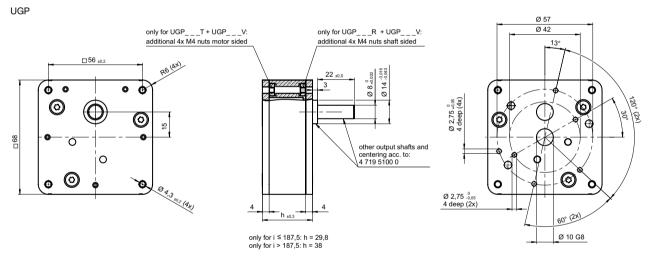


not dimensioned holes suitable for adaptor plate AP60 (accessories) holes @2,75 are intended for thread forming screws M3

Other shafts on request

# Motor Pinion Data UGO/P (STG 60/61)

pinion type	pinion length b	motor pinion with hole d: 022 100 004							
riid	riid	Ø2.5S7	Ø3S7	Ø4X7	Ø5S7				
1	6	-	020	030	040				
2	4.5	-	080	090	110				
3	4.5	270	280	290	310				
4	4.5	580	590	600	610				

Dimensions for motor assembly

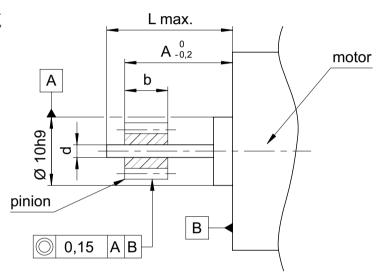

Pinion position

Dimension	Α	L
2 gear stages	8,9	9,6
3-6 gear stages	7,6	7,6

# **AP 60**

Dimensions (mm)

Ø 64


Height (mm)

6

# **Adaptor Plate Data AP 60**

Adaptor plate	Motor type	Manufacturer	Centring Ø D	Order reference
AP 6012	G 30	Dunker	12	81B-001-002-010
AP 6022	G 42, GR 42		22	81B-001-002-016
AP 6014	M 28, M 32	GEFEG	14	81B-001-002-012
AP 6022	M 42, M 48		22	81B-001-002-016

Dimensions

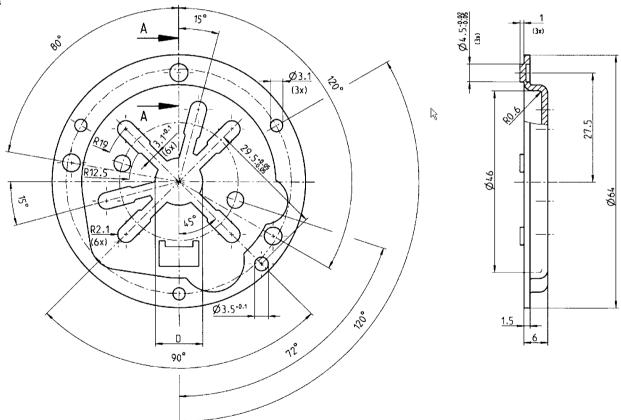

#### **UGJ**

 Dimensions (mm)
 65 x 107

 Height (mm)
 28

 Max. torque (cNm)
 1500

 Ratios
 4½ ... 36.000.000

 Internal slipping clutch none
 Standard shaft (mm)

 Ø 12 x 20
 Weight (g)

 Weight (g)
 480

 Motor combination
 Series UB, UD, UF



#### **Standard Data**

 $\begin{tabular}{lll} Mounting & any position \\ Axial thrust $F_A$ & 400 N \\ Lateral force $F_R$ & 600 N \\ \end{tabular}$ 

Output shafts Ø 12 x 20, other on request

Climatic class wide-spread according to DIN IEC 60721-2-1

Ambient temperature storage °C -40 ... +80

Ratios\* 4 1/6 8 1/3 16 2/3 33 1/3 41 2/3 50 66 2/3 83 1/3 100 125 150 166 2/3 200


4 1/0	0 1/3	10 2/3	33 1/3	41 2/3	50	00 43	03 1/3	100	120	130	100 2/3	200
250	500	1000	2000	2500	3000	4000	5000	6250	8333 1/3	10000	12500	15000
20000	25000	30000	37500	60000	75000	120000	150000	300000	375000	750000	1500000	1800000
2250000	3000000	3600000	4500000	6000000	9000000	11250000	12000000	18000000	36000000			

<sup>\*</sup> For ratio  $\geq$  2500 combination with UGD


#### **Order Reference**

Ratio 100  Slipping clutch N Without slipping clutch  Shaft end N Ø 12 x 20, other on request	Туре	Ge	Gearbox				i	N ;
	Ratio		100			j		;
Shaft end $$ N $$ $$ $$ $$ $$ $$ $$ $$ $$ $$	Slipping clutch	Ν	Without slipping clutch					1
	Shaft end	N	$\varnothing$ 12 x 20, other on request					

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

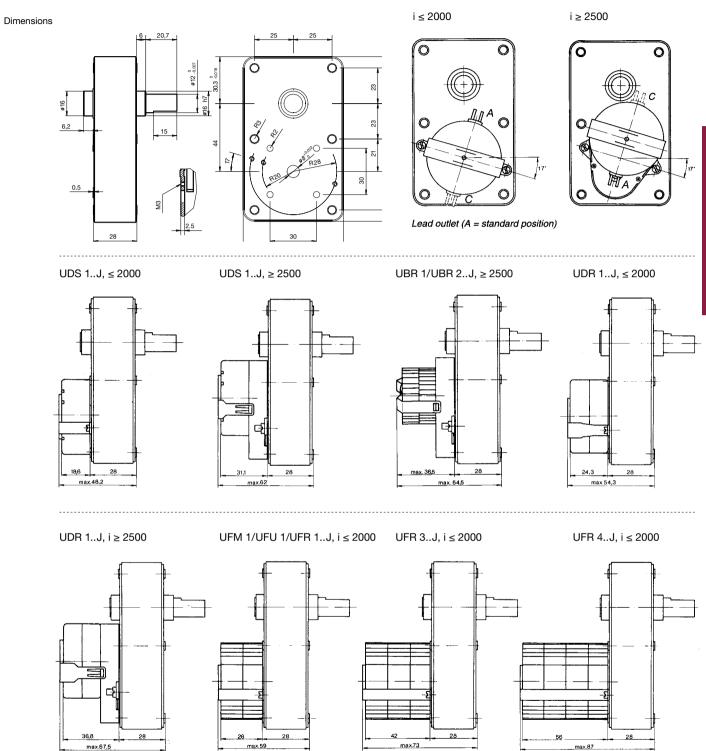

# Torque / ratio / life graph

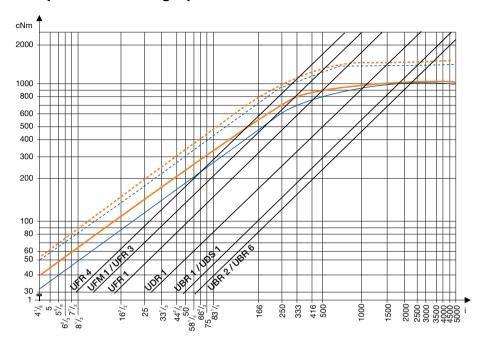

motor torque with consideration for gear efficiency \_

In combination with motors n=250 rpm, continuous operation and Tambient

- 10000 h
- 1000 h

In combination with motors n=500 rpm, continuous operation and T<sub>ambient</sub>
■ 10000 h
■ 1000 h



### **UGR (STG 200)**

Dimensions (mm)	
Height (mm)	
Max. torque (cNm)	2000
Ratios	12.5 375
Internal slipping clutch	none
Standard shaft (mm)	Ø 12 x 35
Weight (g)	depends on ratio
Motor combination	UP



### **Standard Data**

Mounting any position 3000 min-1 Max. input speed \* Max. output torque \* 2000 cNm

Max. input -and output power \* please refer to table in Technical Data

Average back lash unload 0.75° 2/3 stages with 4/10 Nm 1.25° 4/5 stages with 15/20 Nm 2°

Max. axial force F<sub>△</sub> 60 N Max. lateral force F<sub>R</sub>, 20 mm from flange 80 N Max. axial play 0.3 mm Max. radial play 83 µm Ambient temperature operation -15 ... +60°C -40 ... +100 °C

Ratio 12 1/2 37 1/2 93 3/4 125 250

Ambient temperature storage

### **Order Reference**

Туре	Gearbox			UGR	12 ½	N	١	1
Ratio	12 ½							
Mounting layouts	N	standard		 				
Shaft end	N	Ø 12 x 35, others upon	request					
optional	motor pi	nion: see next pages	Motor Pinion Data					

<sup>\*</sup> Depends on ratio, see next page

Ratio	Stages *	Efficiency	Pinion type	Weight	Max. torque (Nm)	Max. input speed (rpm)
12 1/2	2	0.77	1	560	3.6	1500
37 1/2	3	0.68	2	580	9.9	3000
62 1/2	4	0.60	3	600	14.6	3000
75	4	0.60	4	600	17.5	3000
93 3/4	4	0.60	4	600	20	3000
125	4	0.60	4	600	20	3000
250	5	0.53	5	620	20	3000
375	5	0.53	2	620	20	3000


Additionally to the input speed limit: max. 120 rpm output speed

Technical Data valid for an ambient temperature operation: -15...+60°C

\* Direction of rotation of output- and motor-shaft at

2 and 4 stages - same 3 and 5 stages - opposite

### Dimensions other shafts on request

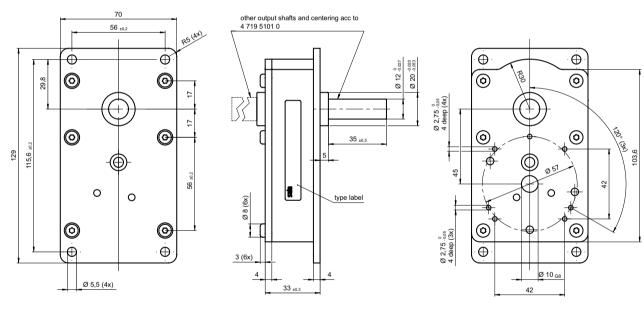


not dimensioned holes suitable for adaptor plate AP60 (accessories) holes  $\emptyset 2,75$  are intended for thread forming screws M3

### **Motor Pinion Data**

pinion type	pinion length b	motor pinion with hole d: 022 100 020								
iniq	piniq	Ø3S7	Ø4X7	Ø5S7						
1	11.5	-	130	140						
2	6.8	280	290	300						
3	11.5	360	370	380						
4	11.5	400	410	-						
5	6.8	-	250	260						

Dimensions for motor assembly

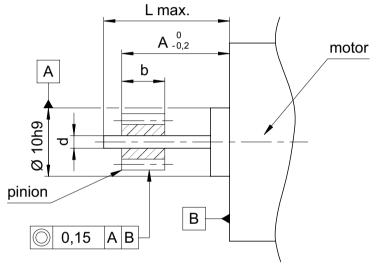

Pinion position

Dimension	Α	L	
2 gear stages	16.1	28	
3 gear stages	10.3	10.3	
4 gear stages	15.1	15	
5 gear stages	10.9	11	

### **Planetary Gearbox UGW**

Dimensions (mm)  $\varnothing$  34 x 62,4 (without motor)

Max. torque (Nm) 4,5 (higher torque on request)

Ratio 541 (4 stages; other ratios on request)

Standard shaft

Ø 8 x 21,3 with flat (other dimensions on request)

Motor combinations

Stepper/Synchronous motor UC; DC motor HC3...6



### Standard Data

Mounting any position

Axial thrust FA 20 N (depend on lifetime spec ; higher force on request)
Lateral force FR 20 N (depend on lifetime spec ; higher force on request)

Climatic class wide spread according to DIN IEC 60721-2-1

Ambient temperature operation  $^{\circ}$ C  $-20 \dots +70$ Ambient temperature storage  $^{\circ}$ C  $-20 \dots +80$ 

Weight 290 g (with DC motor HC313XLG)
Bearing sintered bronze, self-lubricating

### **Order Reference**

Example motor combination: with DC motor HC313XLG Note: UGW is deliverable only as gearbox motor combination

Motor type	JP	DC Motor (brushed)	JP	į	3		A	; N	į	Х9	; V	۷ ;	54C	N	; F	1	N
Motor size	3	diameter 27.5 mm				į						- 1		 	-	- 1	
Motor version	A	13 V; no-load speed 7400 rpm										-		! ! !			
Approval	N	standard										-		! !		- {	
Voltage	X9	13 Vdc													į		
Gearbox size	W	planetary gearbox diameter 34 mm												! ! !			
Gear ratio	54C	541 (4 stages)															
Connection	N A	standard special															
Bearing/ Gear material	F	sintered bearing / metal gear wheels															
Shaft end	N	standard shaft $\varnothing$ 8 x 21.3 with flat															

Technical data of bare gearbox. Data of complete gearmotors on request


Stages	4
Ratio *	541
Max. torque [Nm] **	4,5
Short peak torque [Nm] **	6
Gear efficiency **	0,6

- \* Approximate value, precise values on request.

  Other ratios between 3,8 ...541 on request.
- \*\* Approximate values, must be tested under specific operating conditions in application. Higher values on request.


### Dimensions

Example motor combination: with DC motor HC313XLG; standard shaft

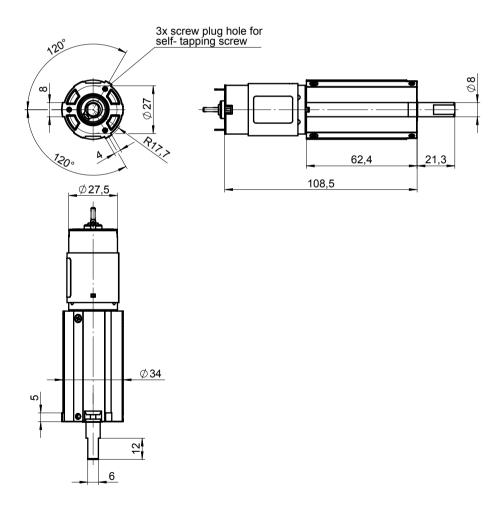

# Gearboxes with DC & BLDC Motors



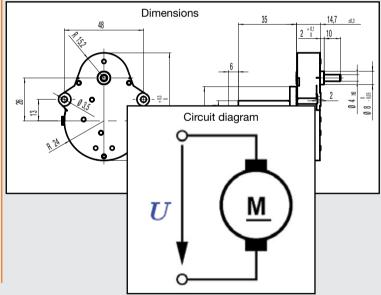



### Gearbox UGM with DC Motor PC280LG

Voltage (Vdc) Height (mm)	12/24
Max. torque (cNm)	60



### **Standard Data**

Ambient temperature operation °C -10 ... +55 Ambient temperature storage °C -20 ... +80 Rotor stalling not permissible

130 (B) according to DIN EN 60085: 2008 Thermal class

standard Approval Electrical connection terminals Mounting any position Weight 105 g Axial thrust 20 N Lateral force 100 N

Output shaft  $\emptyset$  4 × 10 mm (others on request)

Slipping clutch

Bearings sintered bronze, self-lubricating


### **Order Reference**


Motor type	JP	DC Motor (brushed)	JP	i	2	Α	i	N	M4	М	40C	N	N	N	1
Motor size	2	diameter 24.4 mm							! !	: :	 	! !			- 1
Motor version	A B	12 V; no-load speed 3600 rpm 24 V; no-load speed 2400 rpm							! ! ! !	! !	! ! ! !	! ! !			
Approval	N	standard							!		! ! !				
Voltage	M1 M4	12 Vdc 24 Vdc							•		1 1 1 1 1	 			
Gearbox size	М									•	i !				:
Gear ratio	40 C	400									•				į
Connection	N A	terminals, without lead wire with lead wire and connector (on request)										•			-
Slipping clutch	N	without slipping clutch											•		
Shaft end	N	standard shaft $\emptyset$ 4 $\times$ 10, others on request													

Motor JP2A									
Voltage supply	V	12							
No-load motor speed	rpm	3600							
Rated motor speed	rpm	2900							
Rated motor current	mA	105							
Rated motor torque	cNm	0.24							
Gear ratio		120	150	240	300	400	500	1000	1500
	rnm	24	20	12	10	8	6	3	2
Rated output speed	rpm								
Rated output torque	cNm	18	23	36	45	60	60	60	60
Motor JP2B									
Voltage supply	V	24							
No-load motor speed	rpm	2400							
Rated motor speed	rpm	1800							
Rated motor current	mA	34							
Rated motor torque	cNm	0.19							
Gear ratio		120	150	240	300	400	500	1000	1500
Rated output speed	rpm	15	12	8	6	4.5	4	2	1.5
Rated output torque	cNm	14	18	28	36	48	59	60	60

All values approximate. Speed tolerance on request. Output torque permissible max. 60cNm. Continuous duty cycle permissible at rated torque. Higher torque at lower duty cycle on request. Lifetime on request.

### Dimensions

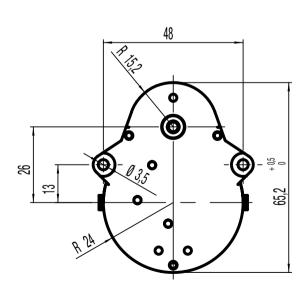

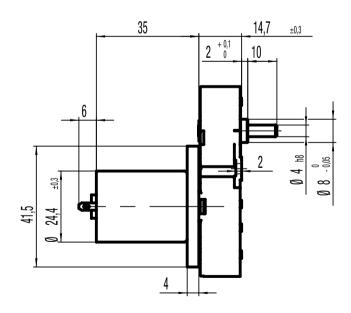

### Gearbox with UGB DC Motor PC280LG

Voltage (Vdc) Height (mm)	12/24
Max. torque (cNm)	200



### **Standard Data**

°C -10 ... +55 Ambient temperature operation Ambient temperature storage °C -20 ... +80 Rotor stalling not permissible Approval standard Electrical connection terminals Mounting any position Weight 200 g Axial thrust 100 N Lateral force 300 N

Output shaft  $\varnothing$  8  $\times$  12 mm (others on request)

Slipping clutch optional

Bearings sintered bronze, self-lubricating

### **Order Reference**

Motor type	JP	DC Motor (brushed)	JP	1	2	Α	N	M4	В	30C	N	N	N	i
Motor size	2	diameter 24.4 mm						}	!	!	! !	! !		:
Motor version	A B	12 V; no-load speed 3600 rpm 24 V; no-load speed 2400 rpm								! ! ! !	 	! ! ! !		
Approval	N	standard							į	! ! !	! ! !	! !		-
Voltage	M1 M4	12 Vdc 24 Vdc						•		! ! ! !	1 1 1 1 1	1 1 1 1 1	 	1 1 1 1
Gearbox size	В								•			! !	! ! !	-
Gear ratio	30 C	300								-		!	! !	
Connection	N A	terminals, without lead wire with lead wire and connector (on request)									•	 		
Slipping clutch	N	without slipping clutch										•	 	-
Shaft end	N	standard shaft $\emptyset$ 8 $ imes$ 12, others on request												1


Motor JP2A									
Voltage supply	V	12							
No-load motor speed	rpm	3600							
Rated motor speed	rpm	2900							
Rated motor current	mA	105							
Rated motor torque	cNm	0.24							
Gear ratio		150	200	300	500	600	750	1000	1500
Rated output speed	rpm	20	15	10	6	5	4	3	2
Rated output torque	cNm	23	30	45	75	90	115	150	200
Motor JP2B									
Voltage supply	V	24							
No-load motor speed	rpm	2400							
Rated motor speed	rpm	1800							
Rated motor current	mA	34							
Rated motor torque	cNm	0.19							
Gear ratio		150	200	300	500	600	750	1000	1500
Rated output speed	rpm	12	9	6	4	3	2.5	2	1.5
Rated output torque	cNm	18	24	36	59	70	90	120	180

All values approximate. Speed tolerance on request. Output torque permissible max. 200cNm.

Continuous duty cycle permissible at rated torque. Higher torque at lower duty cycle on request. Lifetime on request.

Other gear ratios on request.

### Dimensions

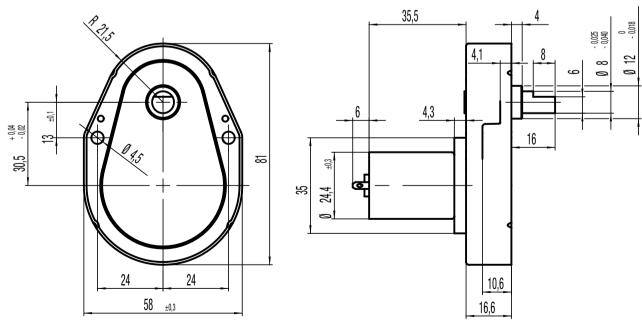

### **Gearbox UGF with DC Motor HC485G**

Voltage (Vdc)	12/24
Max. torque (cNm)	400



### **Standard Data**

°C -10 ... +55 Ambient temperature operation Ambient temperature storage °C -20 ... +80 Rotor stalling not permissible Approval standard Electrical connection terminals Mounting any position Weight 290 g Axial thrust 100 N Lateral force 400 N

Output shaft  $\varnothing$  8  $\times$  12 mm (others on request)

Slipping clutch no

Bearings sintered bronze, self-lubricating

### **Order Reference**

Motor type	JP	DC Motor (brushed)	JP	; 4	. ;	Α	N	M4	F	33C	N	N	N	i
Motor size	4	diameter 31.2 mm					1	!	1	! !	:	 	! !	
Motor version	A B	12 V; no-load speed 4500 rpm 24 V; no-load speed 4600 rpm								 			! ! !	
Approval	N	standard					-	į	į	! ! !			! !	-
Voltage	M1 M4	12 Vdc 24 Vdc						•	 	! ! ! !			1 	1
Gearbox size	F								•	! !				- !
Gear ratio	33C	333								•				į
Connection	N A	terminals, without lead wire with lead wire and connector (on request)									•		! ! !	
Slipping clutch	N	without slipping clutch												
Shaft end	N	standard shaft $\emptyset$ 8 $\times$ 12, others on request											, 	

Motor JP2A									
Voltage supply	V	12							
No-load motor speed	rpm	4500							
Rated motor speed	rpm	3700							
Rated motor current	mA	520							
Rated motor torque	cNm	1.0							
Gear ratio		125	166	250	333	500	750	1000	1200
Rated output speed	rpm	30	22	15	11	7.5	5	3.7	3.1
Rated output torque	cNm	80	100	150	200	300	400	400	400
Motor JP2B									
Voltage supply	V	24							
No-load motor speed	rpm	4600							
Rated motor speed	rpm	3900							
Rated motor current	mA	260							
Rated motor torque	cNm	1.0							
Gear ratio		125	166	250	333	500	750	1000	1200
Rated output speed	rpm	31	23	16	12	8	5.2	3.9	3.2

150

200

300

400

400

400

100


All values approximate. Speed tolerance on request. Output torque permissible max. 400cNm.
Continuous duty cycle permissible at rated torque.
Higher torque at lower duty cycle on request.
Lifetime on request.


cNm

Other gear ratios on request.

Rated output torque

#### Dimensions

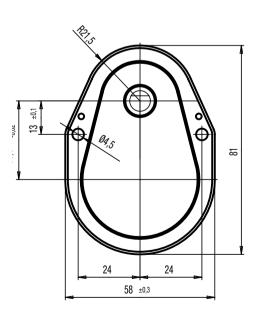

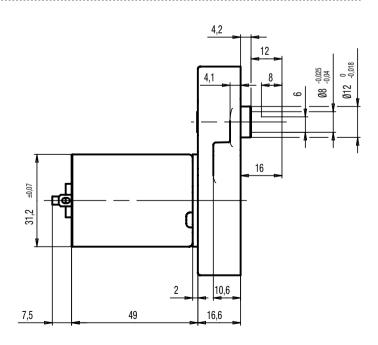

### **Gearbox UGO with BLDC Motor E9IDS**

Voltage (Vdc)	24
Max. torque (cNm)	600
Characteristics	Driver electronics integrated inside motor
Options	Closed loop speed control Brake feature by relay shortcut circuit



### **Standard Data**

Ambient temperature operation  $^{\circ}$ C  $^{\circ}$ C

Electrical connection connector at motor Mounting any position

Weight 500 – 600 g

Axial thrust 30 N

Lateral force 80 N

Output shaft  $\varnothing$  8  $\times$  25 mm (others on request)

Slipping clutch no
Bearings bronze

### **Order Reference**


Motor type	JP	BLDC Motor (brushed)	JP	i	9	В	N	: M4	0	75C	Α	N	1	N	
Motor size	9	diameter 50 mm					-		-	i !	!	1	-		1
Motor version	В	24 V; no-load speed 5900 rpm						1		 	! ! !	-			1
Approval	N	standard					-	-		! ! !	! !	:			1
Voltage	M4	24Vdc								 		į			
Gearbox size	0								•	i ! !	! !	-			1
Gear ratio	75C	750								•	:	1	-		1
Connection	N A	lead wires with connector at motor										 			
Slipping clutch	N	without slipping clutch													
Shaft end	N	standard shaft $\emptyset$ 8 $\times$ 25, others on request													


Motor JP2A									
Voltage supply	V	24							
No-load motor speed	rpm	5900							
Rated motor speed	rpm	4600							
Rated motor current	mA	850							
Rated motor torque	cNm	3.0							
Gear ratio		18.75	37.5	62.5	93.75	125	187.5	375	750
Rated output speed	rpm	240	120	74	48	37	24	12	6
Rated output torque	cNm	40	80	120	170	230	340	600	600

All values approximate. Speed tolerance on request. Output torque permissible max. 600cNm. Continuous duty cycle permissible at rated torque. Higher torque at lower duty cycle on request. Lifetime on request.

Other gear ratios on request.

Dimensions

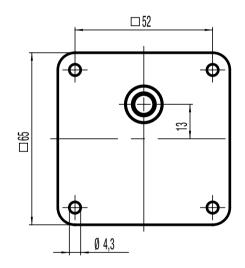

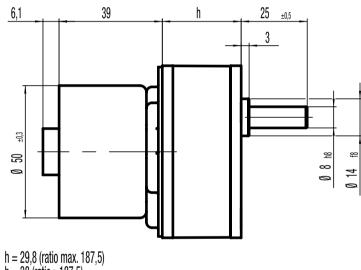

### **Gearbox UGP with DC Motor HC785G**

Voltage (Vdc)	24
Max. torque (cNm)	600



### **Standard Data**

°C 0 ... +50 Ambient temperature operation Ambient temperature storage °C -20 ... +80 Rotor stalling not permissible Approval standard Electrical connection terminals Mounting any position Weight 500 - 600 g Axial thrust 30 N Lateral force 80 N

Output shaft  $\emptyset$  8  $\times$  25 mm (others on request)

Slipping clutch no
Bearings bronze

### **Order Reference**

Motor type	JP	DC Motor (brushed)	JP	;	7	; В	. ;	Ν	M4	P	37C	N	N ;	Ν	į
Motor size	7	diameter 42 mm					- 1			i !	i !	 			1
Motor version	В	24 V; no-load speed 4500 rpm								:	! ! !	 			-
Approval	N	standard								1	! !	! !			-
Voltage	M4	24 Vdc								į	!				i
Gearbox size	P									•	: : :	! !			-
Gear ratio	37C	375									•	! !			-
Connection	N A	terminals, without lead wire with lead wire and connector (on request)										•			
Slipping clutch	N	without slipping clutch											' ¦		-
Shaft end	N	standard shaft $\emptyset$ 8 $\times$ 25, others on request													

Motor JP7B									
Voltage supply	V	24							
No-load motor speed	rpm	4500							
Rated motor speed	rpm	3800							
Rated motor current	mA	900							
Rated motor torque	cNm	3.5							
Gear ratio		18.75	37.5	62.5	93.75	125	187.5	375	750
Rated output speed	rpm	200	100	60	40	30	20	10	5
Rated output torque	cNm	45	90	140	200	270	400	600	600

All values approximate. Speed tolerance on request. Output torque permissible max. 600cNm.


Continuous duty cycle permissible at rated torque.

Higher torque at lower duty cycle on request.

Lifetime on request.


Other gear ratios on request.

#### **Dimensions**

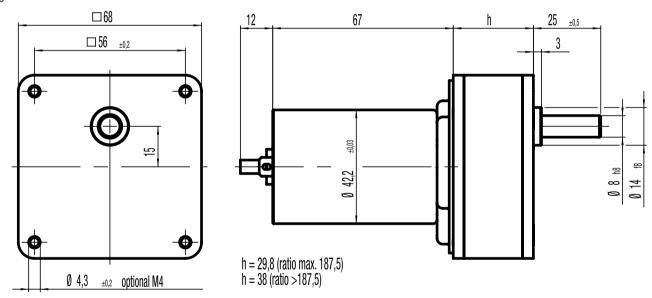

# Synchronous Motors Linear



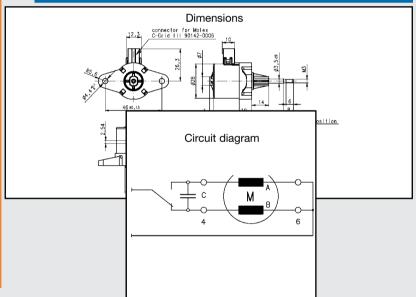



### **UCC1/7**

Dimensions (mm)	Ø 28 x 31
Travel (mm)	10/13
Voltage (V) **	12–230
Speed (mm/s) 50 Hz 60 Hz	4.16 5
Max. Force (N)*	48



<sup>\*</sup> Depends on winding, frequency and lifetime required. Values for connector versions (C, D) / lead wire versions (N) up to 20 % lower. Drive against end stops only permissible after clarification of operating conditions and approval by Saia motors. Radial forces on the shaft will reduce life time and performance.

Note: All force and power output values are minimum values, at rated voltage and motor temperature 23°C.

### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

 $\begin{array}{lll} \mbox{Ambient temperature operation} & \mbox{°C -15 ... +60} \\ \mbox{Ambient temperature storage} & \mbox{°C -20 ... +100} \\ \mbox{Thermal resistance at f=0 R}_{therm} & \mbox{29 K/W} \\ \end{array}$ 

Thermal class 130 (B) according to DIN EN 60085 : 2008

Winding coil temperature increase K 60
Approval standard
Mounting any position

Electrical connection connector type C, D, N

Protection IP40 according to DIN EN 60529 : 2014

Weight 67 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings ball bearing

### **Order Reference**

Туре	Synch	nronous Motor			UCC	- 1	13	į	N	B4	D	1B	
Configuration	13	standard magnet	73	stronger magnet							! ! !		1
Approval	N										! ! !		
Voltage/frequency		see next pages									1		
Connection	C D	see next pages "Connec	ction Types" a	and page 145 "Connection	on Types"	for	В			 	•		
Shaft	1B	Travel 13 mm ± 0.7 mm	(other standa	ard shafts see under dim	nensions)					 		,	


<sup>\*\*</sup> regard circuit diagram and connector type

### UCC


### **Technical Data**

Rated frequency	Axial speed Tolerance of voltage Linear travel max. Axial play at ± 20 N force Winding temperature T <sub>max</sub>	Hz mm/s mm mm	50 4.16 standard p 10/13 < 0.25 130	4.16 standard power supply system +10% / –10% 10/13 < 0.25				
	Rated voltage $U_N$ Duty cycle Resistance $R_{20}$ Capacitor $C_{50}$ Winding code	V % Ω μF/V ±10%	12 100 53 18/20 B1	24 100 210 4.7/40 B4	110 <sup>1)</sup> 100 5000 0.22/200 C8			

Circuit diagram Parallel circuit 12 V, 24 V, 48 V




Parallel circuit 230 V (only for connector N) with 110 V motor and resistor  $R_{V}$ 




 $R_V = 5.6 \text{ k}\Omega, 3 \text{ W}$ 

Series circuit 110 V (only for connector N)



Parallel circuit 230 V (only for connector N) with 110 V motor and capacitor  $C_{\text{V}}\,$ 



 $C_V = 0.33 \ \mu F, 250 \ VAC$ 


switch to

- 1 Pull (in)
- 4 Push (out)
- 6 Push (out) (for series circuit)


110 V version available with 150 mm lead wires AWG26 only Standard versions:

Shaft type (see dimensions)	Order code				
1B	UCC13NC8N1BZ4				
1E	UCC13NC8N1EZ4				
1S	UCC13NC8N1SZ4				
1R	UCC13NC8N1RZ4				
1Q	UCC13NC8N1QZ4				


### Dimensions Version with Connector D, with 13 mm travel, shaft 1B and 1E

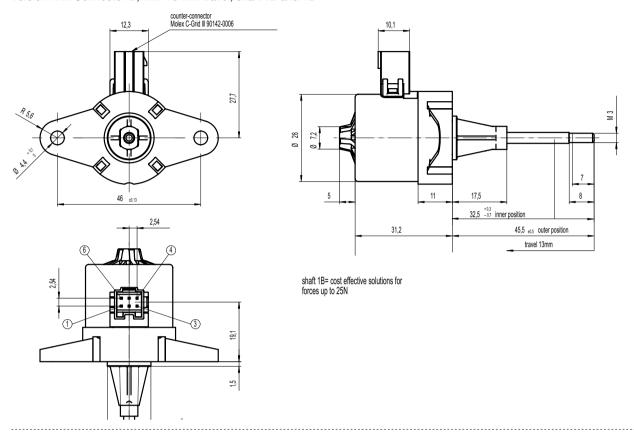

Version with Connector D, with 50..150 mm travel, shaft 1R, 1S, 1Q

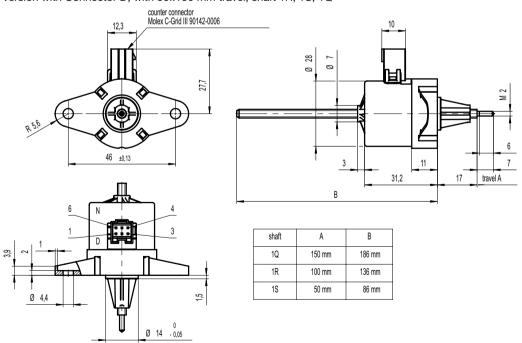

### Dimensions 110 V version with lead wires

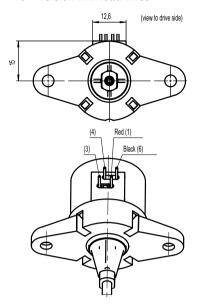

different lead colours for 110V (230V) for rotary synchronous motors in serials circuit

Force

			connector version		lead wire version			
			50 Hz	60 Hz	50 Hz	60 Hz		
	UCC1	100 %	33 N	35 N	26 N	29 N		
	0001	30%	39 N	41 N	31 N	34 N		
	UCC7	100 %	39 N	41 N	32 N	35 N		
	0007	30%	47 N	48 N	38 N	42 N		

### **UCK 1/7**

Dimensions (mm) Ø 28 x 31 Travel (mm) 10/13 Voltage (V) \*\* 12-230 50 Hz 8.33 60 Hz 10 Max. Force (N)\* 49



<sup>\*</sup> Depends on winding, frequency and lifetime required. Values for connector versions (C, D) / lead wire versions (N) up to 20 % lower. Drive against end stops only permissible after clarification of operating conditions and approval by Saia motors. Radial forces on the shaft will reduce life time and performance.

Note: All force and power output values are minimum values, at rated voltage and motor temperature 23°C.

### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation °C -15 ... +60 Ambient temperature storage °C -20 ... +100 29 K/W

Thermal resistance at f=0 R<sub>therm</sub>

130 (B) according to DIN EN 60085: 2008 Thermal class

Winding coil temperature increase K 60 Approval standard Mounting any position

Electrical connection connector type C, D, N

IP40 according to DIN EN 60529: 2014 Protection

Weiaht

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings ball bearing


### **Order Reference**

Туре	Synch	hronous Motor			UCK	1	13	i	N	В	4	D	i	1B	į
Configuration	13	standard magnet	73	stronger magnet											-
Approval	N														-
Voltage/frequency		see next page													
Connection	C D	see next pages "Connec	tion Types" a	and page 145 "Connect	ion Type	s" f	or B					•			
Shaft	1B	Travel 13 mm ± 0.7 mm	other standa	ard shafts see under di	mension	s)									


<sup>\*\*</sup> regard circuit diagram and connector type

Rated frequency Speed Tolerance of voltage Axial play at 20 N force Duty cycle	Hz mm/s mm	< 0.25 100 %	d power sup	oply system +10% / –10%	
Winding temperature T <sub>max</sub>		130			
Rated voltage U <sub>N</sub> Duty cycle	V %	12 100	24 100	110 <sup>1)</sup> 100	
Resistance R <sub>20</sub> Capacitor C <sub>50</sub> Winding code	Ω μF / V ±10%	59 22/20 B1	230 5.6/40 B4	5500 0.27/200 C8/H8	

Circuit diagram Parallel circuit 12 V, 24 V, 48 V



Parallel circuit 230 V (only for connector N) with 110 V motor and resistor  $R_{\text{V}}\,$ 




 $R_V = 5.6 \text{ k}\Omega, 3 \text{ W}$ 


switch to

- 1 Pull (in)
- 4 Push (out)
- 6 Push (out) (for series circuit)

Series circuit 110 V (only for connector N)



Parallel circuit 230 V (only for connector N) with 110 V motor and capacitor  $C_{V}$ 




 $C_V = 0.33 \ \mu\text{F}, 250 \ VAC$ 


110 V version available with 150 mm lead wires AWG26 only Standard versions:

Shaft type (see dimensions)	Order code				
1B	UCK13NC8N1BZ2				
1E	UCK13NC8N1EZ2				
1S	UCK13NC8N1SZ2				
1R	UCK13NC8N1RZ2				
1Q	UCK13NC8N1QZ2				

### Dimensions Version with Connector D, with 13 mm travel, shaft 1B and 1E

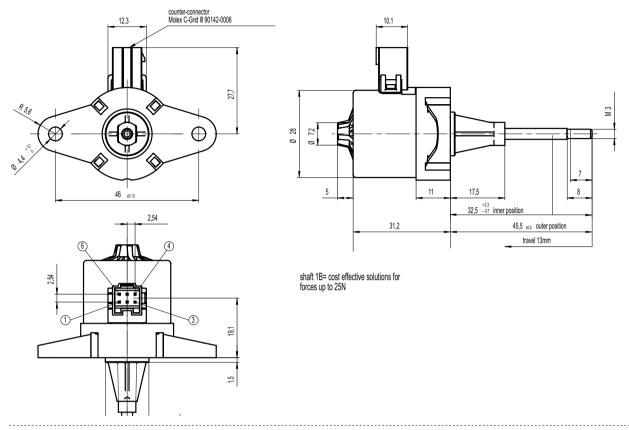


Version with Connector D, with 50..150 mm travel, shaft 1R, 1S, 1Q

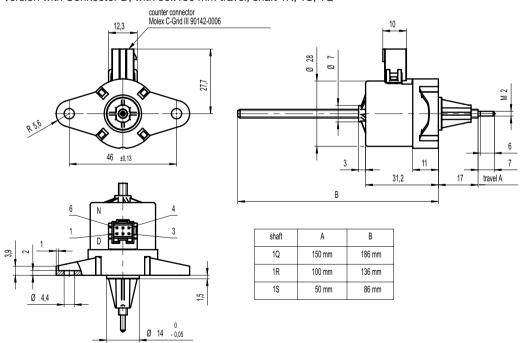

# **UCK**

### Dimensions 110 V version with lead wires

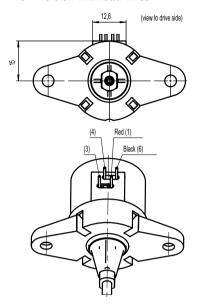


different lead colours for 110V (230V) for rotary synchronous motors in serials circuit

Force

			connector version		lead wire version		
		50 Hz	60 Hz	50 Hz	60 Hz		
	UCK1	100 %	27 N	28 N	19 N	19 N	
	UCKI	30%	35 N	41 N	24 N	26 N	
	LICKT	100 %	34 N	33 N	22 N	21 N	
	UCK7	30%	44 N	49 N	29 N	30 N	

# Stepper Motors Linear



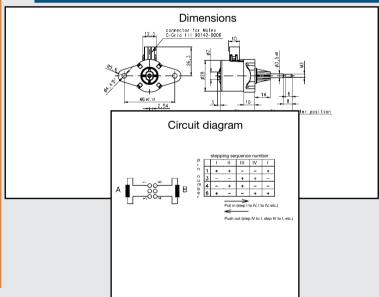



### **UAL**

### **UAL 1/5; UAL 2**

Dimensions (mm)	
Travel (mm)	15
Travel per step (mm)	0,021
Thread pitch (mm)	0,5
Speed (mm/s) at 200 Hz	4,16
Step angle (°)	15
Max. Force (N)*	40



Drive against end stops only permissible after clarification of operating conditions and approval by Saia Motor.

Radial forces on the shaft will reduce life time and performance.

Note: All force and power output values are minimum values, at rated voltage and motor temperature 23°C.

### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +60 Ambient temperature storage  $^{\circ}$ C -20 ... +100 Thermal resistance at f=0 R<sub>mem</sub> 47 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard
Mounting any position

Electrical connection lead wire with CT connector

Protection IP40 according to DIN EN 60529 : 2014

Weight 33 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings ball bearing

### **Order Reference**

Туре	Type Stepper Motor		UAL	į	1E	N	01	E	1A	
Configuration	1A 1E 2A 2E 5A 5E	bipolar, standard magnet, screw flange bipolar, standard magnet, bayonet flange unipolar, standard magnet, screw flange unipolar, standard magnet, bayonet flange bipolar, stronger magnet, screw flange bipolar, stronger magnet, bayonet flange								
Approval	N	standard								
Winding code		see next page, resistance per winding for bipolar or unipolar								
Connection	Е	100 mm lead wire with CT connector								
Shaft	1A	Travel 15 mm ± 0,7 mm (others on request)							 	

<sup>\*</sup>Depends on winding, frequency and lifetime required.


	Steps per mm Winding temperature T <sub>max</sub> Linear travel max. Axial play at 20 N force	°C mm mm	48 130 15 0.25			 	
unipolar	versions available upon request					 	
bipolar	Rated voltage U <sub>N</sub> Duty cycle	V %	6 100	12 100	24 100	 	
	Resistance R <sub>20</sub> Winding code	Ω	40 03	150 01	610 04		

 $<sup>^{\</sup>star}$  measured at 23 °C, lifetime depends on load characteristics and ambient conditions

### Circuit diagram bipolar

			step		
		I	II	III	IV
connector	4	+	+	•	•
	2	-	-	+	+
	3	-	+	+	-
	1	+	-	•	+






### unipolar


			step		
			II	III	IV
	1			-	
	3	+	+	+	+
ector	5	-	-		
connector	6	-			-
	4	+	+	+	+
	2		-	-	


direction I..IV push direction IV...I pull





# **UAL**

Dimensions Version with 100 mm leads and CT connector, 15 mm travel




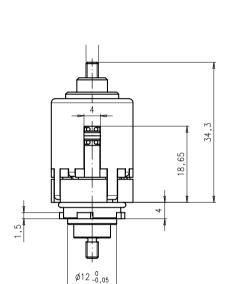

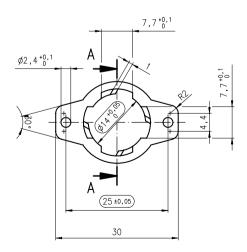

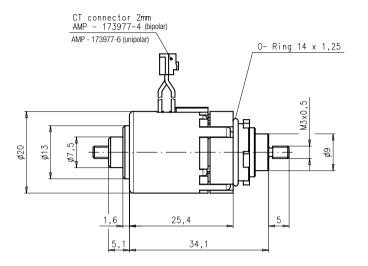



Connecting dimensions of direct bayonet mount




Material thickness 1,5 mm

### **Performance Chart**

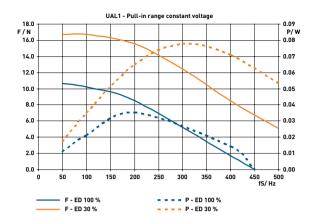

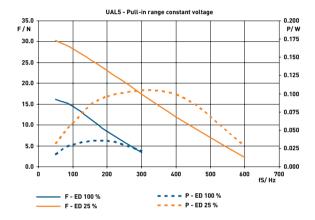

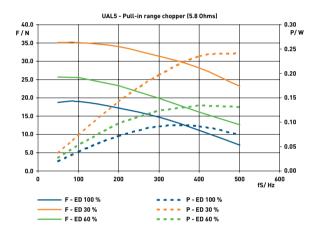

100% duty cycle: max. current per phase 300 mA 60% duty cycle: max. current per phase 360 mA 30% duty cycle: max. current per phase 500 mA

# **UCE**

### **UCE1/7; UCE2/8**

Dimensions (mm)	Ø 28 x 31
Travel (mm)	10/13
Travel per step (mm)	0.021
Speed (mm/s) at 200 Hz	4.16
Max. Force (N)*	80



Drive against end stops only permissible after clarification of operating conditions and approval by Saia Motors.

Radial forces on the shaft will reduce life time and performance.

Note: All force and power output values are minimum values, at rated voltage and motor temperature 23°C.

### Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1: 2015

Ambient temperature operation °C -15 ... +60 °C -20 ... +100 Ambient temperature storage Thermal resistance at f=0 Rtherm 29 K/W

Thermal class 130 (B) according to DIN EN 60085: 2008

Approval standard Mounting any position Electrical connection connector type C, D

Protection IP40 according to DIN EN 60529: 2014

Weiaht

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings ball bearing


### **Order Reference**


Туре	Stepper Motor UCE						13	i	Ν	į	01	1	D	1	1B	
Configuration	13 23	bipolar, standard magnet unipolar, standard magnet	73 83	bipolar, stronger magnet unipolar, stronger magnet	t											
Approval	N															
Resistance	see next page, Resistance per winding for bipolar or unipolar											-				
Connection	C see next pages "Connection Types" and page 145 "Connection Types" for B D															
Shaft	1B	Travel 13 mm ± 0.7 mm (other	standard	shafts see under dimension	ıs)											

<sup>\*</sup>Depends on winding, frequency and lifetime required.

bipolar	Rated voltage U <sub>N</sub> : Resistance per winding R <sub>20</sub>	V Ω	6 24	12 90	24 380
	Travel per step	mm	0.021		
	Winding temperature T <sub>max</sub>	°C	130		
	Axial play at ± 20 N force	mm	< 0.25		


Circuit diagram bipolar






Push out (step IV to I, step IV to I, etc.)


unipolar






Push out (step IV to I, step IV to I, etc.)


### Dimensions

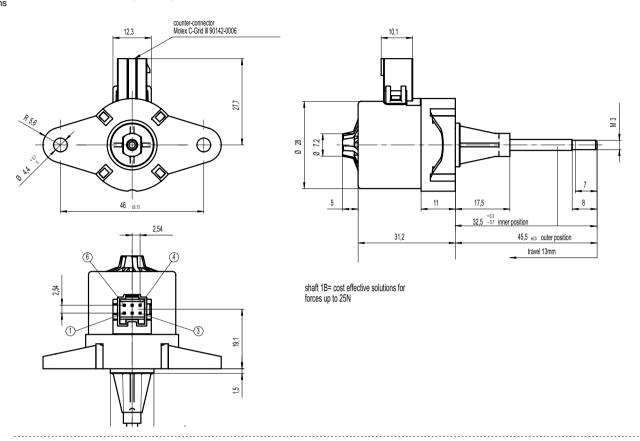



Version with Connector D, with 50..150 mm travel, shaft 1R, 1S, 1Q

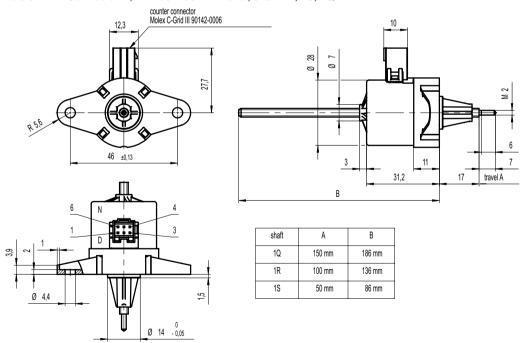


### **Performance Chart**

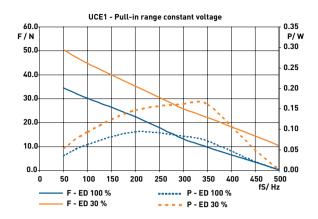


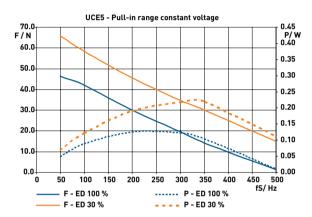

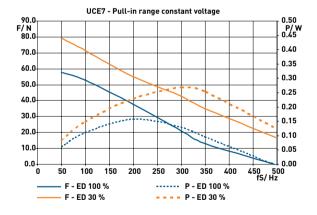


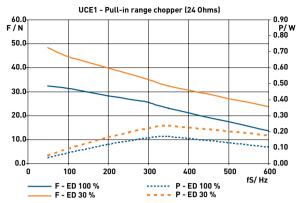

100% duty cycle: max. current per phase 180mA 30% duty cycle: max. current per phase 300mA

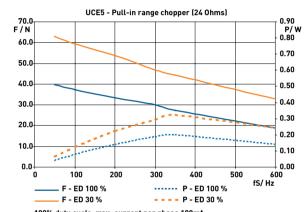



100% duty cycle: max. current per phase 180mA 30% duty cycle: max. current per phase 300mA

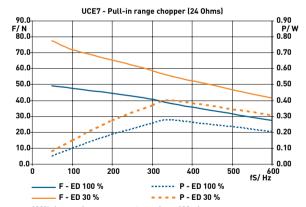


100% duty cycle: max. current per phase 180mA 30% duty cycle: max. current per phase 300mA

# **Performance Chart**

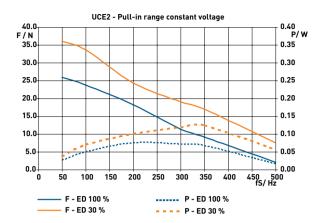

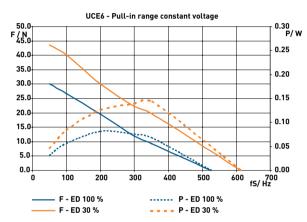

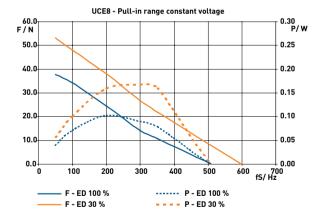

# UCL1/7; UCL2/8



Drive against end stops only permissible after clarification of operating conditions and approval by Saia Motors.

Radial forces on the shaft will reduce life time and performance.

Note: All force and power output values are minimum values, at rated voltage and motor temperature 23°C.

# Standard Data

Climatic class wide-spread according to DIN IEC 60721-2-1 : 2015

Ambient temperature operation  $^{\circ}$ C -15 ... +60 Ambient temperature storage  $^{\circ}$ C -20 ... +100 Thermal resistance at f=0 R<sub>therm</sub> 29 K/W

Thermal class 130 (B) according to DIN EN 60085 : 2008

Approval standard

Mounting any position

Electrical connection connector type C, D

Protection IP40 according to DIN EN 60529: 2014

Weight 67 g

Rotor stalling motor can be stopped when voltage is applied, without being overheated

Bearings ball bearing

### **Order Reference**

Туре	Stepper Motor				UCL	13	N	N	01	D	1B	į
Configuration	13 23	bipolar, standard magnet unipolar, standard magnet	73 83	bipolar, stronger magnet unipolar, stronger magnet							1 1 1 1 1 1 1 1	
Approval	N										1 1 1 1 1	
Resistance		see next page, Resistance per winding for bipolar or unipolar								1 1 1 1 1		
Connection	On C see pages 151, "Connection Types" D								1 1 1 1 1 1 1			
Shaft	Shaft 1B Travel 13 mm ± 0.7 mm (other standard shafts see under dimensions)											


All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes


<sup>\*</sup>Depends on winding, frequency and lifetime required.

# **Technical Data**

bipolar	Rated voltage U <sub>N</sub> :	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	24	90	380	
Winding code			05	02	01	 
unipolar	Rated voltage U <sub>N</sub> :	V	6	12	24	
	Duty cycle	%	100	100	100	
	Resistance R <sub>20</sub>	Ω	24	90	380	
	Winding code		07	80	01	
	Travel per step	mm	0.042			 
	Winding temperature T <sub>max</sub>	°C	130			
	Axial play at ± 20 N force	mm	< 0.25			


Circuit diagram bipolar







Push out (step IV to I, step IV to I, etc.)

unipolar







#### Dimensions Version with Connector D, with 13 mm travel, shaft 1B and 1E

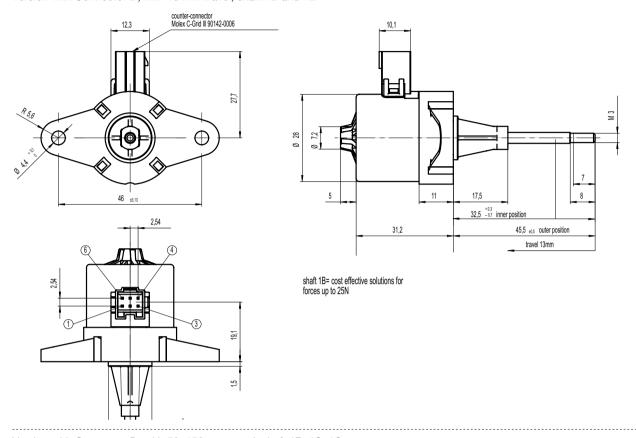



Version with Connector D, with 50..150 mm travel, shaft 1R, 1S, 1Q

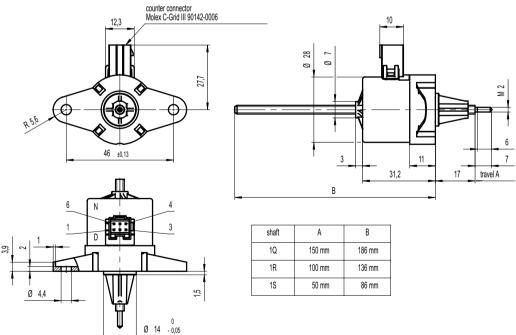


#### **Performance Chart**

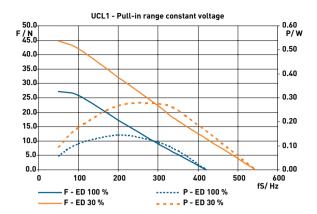


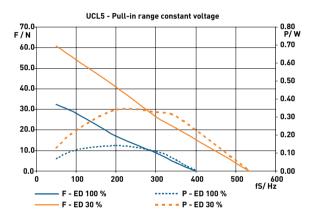

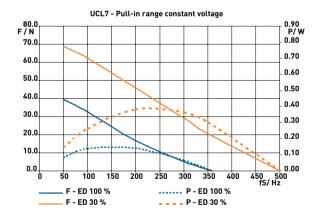


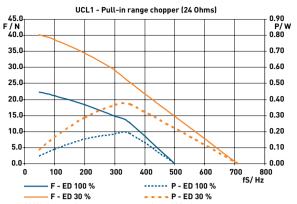

100% duty cycle: max. current per phase 180mA 30% duty cycle: max. current per phase 300mA

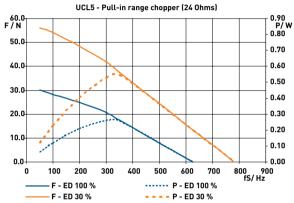



100% duty cycle: max. current per phase 180mA 30% duty cycle: max. current per phase 300mA

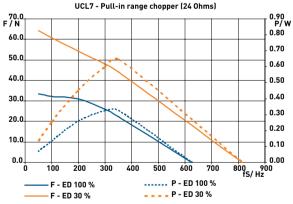


100% duty cycle: max. current per phase 180mA 30% duty cycle: max. current per phase 300mA

# **Performance Chart**

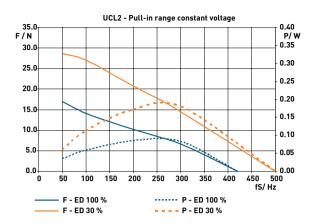

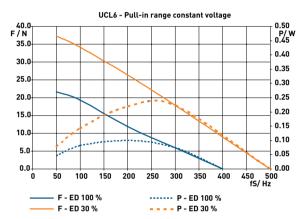

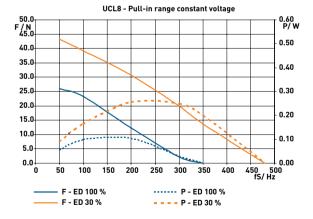



# **Connection Types UC motors**

Connector B for Molex Milli-Grid 51110-0660 12,3 (view to drive side)


3 up to 48V for rotary and linear motors (bipolar, unipolar, synchronous)


Connector C for Tyco Modu IV 0-1740209-6







Connector D for Molex C-Grid III 90142-0006





# Electronics for Stepper Motors

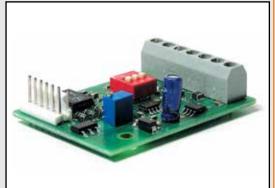

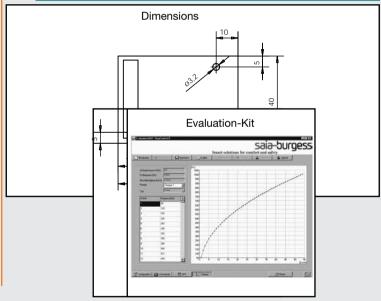



# Samotronic101

#### SAMOTRONIC101

Driver for unipolar motors Dimensions (mm) 55 x 40 Supply voltage (VDC) 10-24 Motor current constant voltage drive Step mode full/half step Clock source internal or external Control inputs to ■ inhibit internal clock



# **Preferred Range**

■ inhibit motor current ■ change direction of rotations

Configuration via DIP-switch, potentiometer

Ordering Reference

4 636 6608 0 If motors are also to be ordered please state: "with MTA-100 receptacles for use with SAMOTRONIC101".

4 636 6608 3 with screw terminal for motor connection, max 0.5 mm<sup>2</sup>


#### **Technical Data**

Supply voltage 10-24 VDC Phase current  $\leq$  350 mA

Control signal level LS-TTL (0-5V) for all control inputs

Internal clock 50-360 Hz External clock up to 2 kHz **Dimensions** 55 x 40 mm Operating temperature -5 to +50 °C Storage temperature -20 to +70 °C

Dimensions

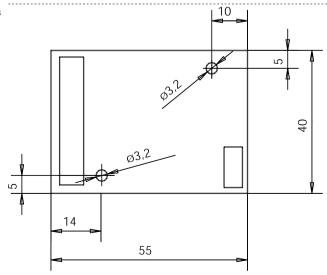

For latest technical and safety compliance information regarding these products, please download the relevant data sheet from our web site: www.saia-burgess.com/drivers

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

# Samotronic102

#### **SAMOTRONIC102**

Driver for bipolar motors

Dimensions (mm) 84 x 54

Supply voltage ■ standard version 10 DC-24

(VDC) ■ enhanced version 10 DC-42

Motor current ■ constant current drive (chopper controlled)

■ adjustable via potentiometer

Step mode full/half step

Clock source internal or external

Control inputs to ■ inhibit internal clock

■ inhibit motor current

■ change direction of rotations

Configuration via DIP-switch, potentiometer

Test pins ■ motor current

step frequency



## **Preferred Range**

Ordering Reference

4 636 6733 0 10-24VDC supply voltage (standard version)

4 636 6733 3 10-42VDC supply voltage (enhanced version)

If motors are also to be ordered please state: "with MTA-100 receptacles for use with SAMOTRONIC102".

#### **Technical Data**

Supply voltage 10-24 (42)VDC


Phase current 71-500 mA, on request max. 735mA/ph

Chopper frequency typ. 20kHz

Control signal level LS-TTL (0-5V) for all control inputs

Internal clock 50-1325 Hz
External clock up to 2 kHz
Dimensions 84 x 54 mm
Operating temperature -20 to +60 °C
Storage temperature -20 to +80 °C

Dimensions

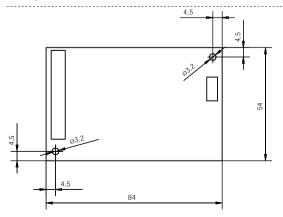

For latest technical and safety compliance information regarding these products, please download the relevant data sheet from our web site: www.saia-burgess.com/drivers

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

# **Evaluation-Kit 2**

#### **Evaluation-Kit 2**

Driver for unipolar and bipolar motors

Dimensions (mm)  $\,$  metal case 164 x 130 x 45

Motor voltage

(VDC) 3-48 Unipolar motors

AC) 8-48 Bipolar motors (< 8 on request)

Motor current constant voltage drive and

constant current drive (chopper controlled)

Step mode full/half/micro step

Clock source internal, programmable

Control inputs to ■ 3 digital inputs

■ 4 signal outputs

■ 1 analog input 0...10 VDC

■ relay contact

Configuration RS 232, USB



#### **Order Reference**

4 717 4898 0

Power supply (on request)

### **Technical Data**

Supply voltage 10-48 VDC/24 VAC Phase current  $\leq$  up to 2.3 A

Step modes 11 (full, half, wave ... microstep)


Max. step frequency 10 kHz

PLC max. 256 steps, 65536 loops

Operating temperature  $0 \dots +55 \,^{\circ}\text{C}$ Storage temperature  $-20 \text{ to } +80 \,^{\circ}\text{C}$ 

Test the Stepconfreeware without hardware in a special demo mode

(www.saia-burgess.com/evaluationkit2).

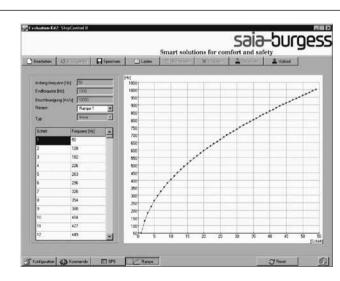

For further information please contact your Saia-Burgess sales company or see our website www.saia-burgess.com.

All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric.

Please also read "Saia Motors Important Notes" on catalog or at www.johnsonelectric.com/SaiaMotorsNotes

# Headquarters

6/F, 12 Science Park East Avenue, Hong Kong Science Park Shatin, NT, Hong Kong Phone: +852 2663 6688 e-mail: sales@johnsonelectric.com

# Sales Offices (IPG)

# Asia

#### China

No. 1, Lane 10800, Songze Avenue, Qingpu Industrial Zone Shanghai 201700 Phone: +86 21 6922 8256

Xin Er Industrial Zone Shajing Town, Baoan District Shenzhen 518125 Phone: +86 755 2990 0437

Yaesu Dai Bldg., 6F 1-1-1 Kyobashi, Chuo-ku, Tokyo 104-0031 Phone: +81-3 3242 3830

#### Singapore

20 Harbour Drive #02-02 PSA Vista Singapore 117612 Phone: +65 6224 7570

#### **South Korea**

Fine Building, 4th Floor, 304 Sinbanpo-ro, Seocho-Ku **Seoul 137-808** Phone: +82 2 518 8347

Germany

**Europe** 

Auf der Löbke 10 58553 Halver Phone: +49 2353 911 0

### Italy

Via Cadamosto 3 20094 **Corsico**, Milano Phone: +39 02 4869 21

#### Switzerland

Freiburgstrasse 33 3280 Murten Phone: +41 26 672 71 11

#### **United Kingdom**

Unit 5, Woodstock Way, Boldon Business Park, Boldon Tyne & Wear, NE35 9PF Phone: +44 844 811 2130

# **Americas**

#### USA

10 Progress Drive Shelton, CT 06484 Phone: +1 203 447 5362

801 Scholz Drive P.O. Box 427 Vandalia, OH 45377 Phone: +1 937 454 2363

#### **Brazil**

Av. Papa Joao Paulo I - 1174 Guarulhos, CEP 07170-350 Sao Paulo Phone: +55 11 2431 5600

### **Johnson Electric Group**

6/F, 12 Science Park East Avenue, Hong Kong Science Park Shatin, NT, Hong Kong Phone: +852 2663 6688 sales@johnsonelectric.com www.johnsonelectric.com